


Data Mining II

Data Preprocessing




Introduction

- “Give me six hours to chop down a tree and I will spend the first four sharpening the axe.”

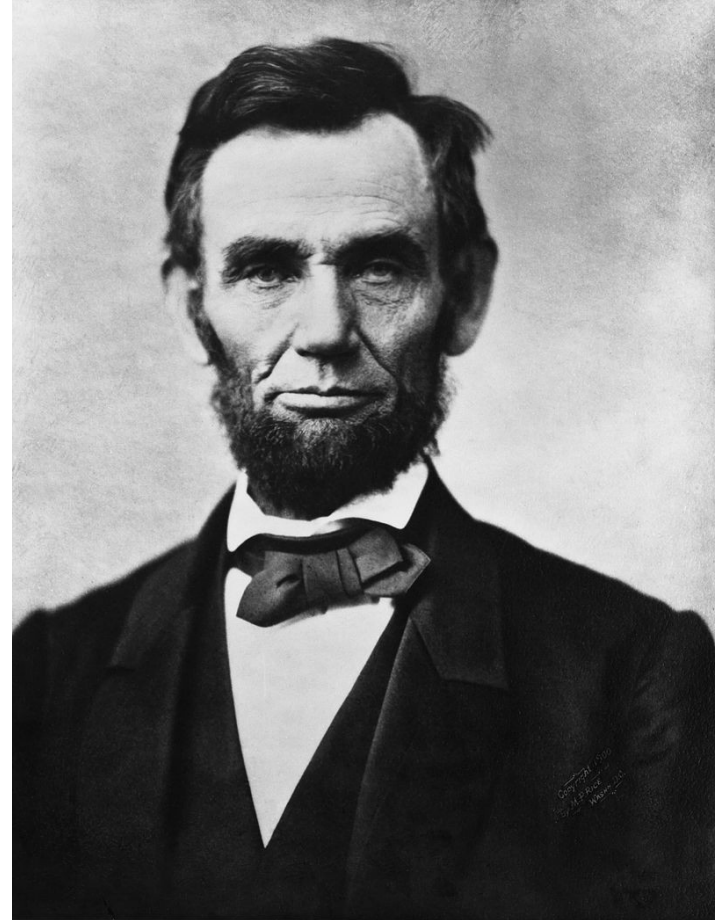

Abraham Lincoln, 1809-1865

Recap: The Data Mining Process

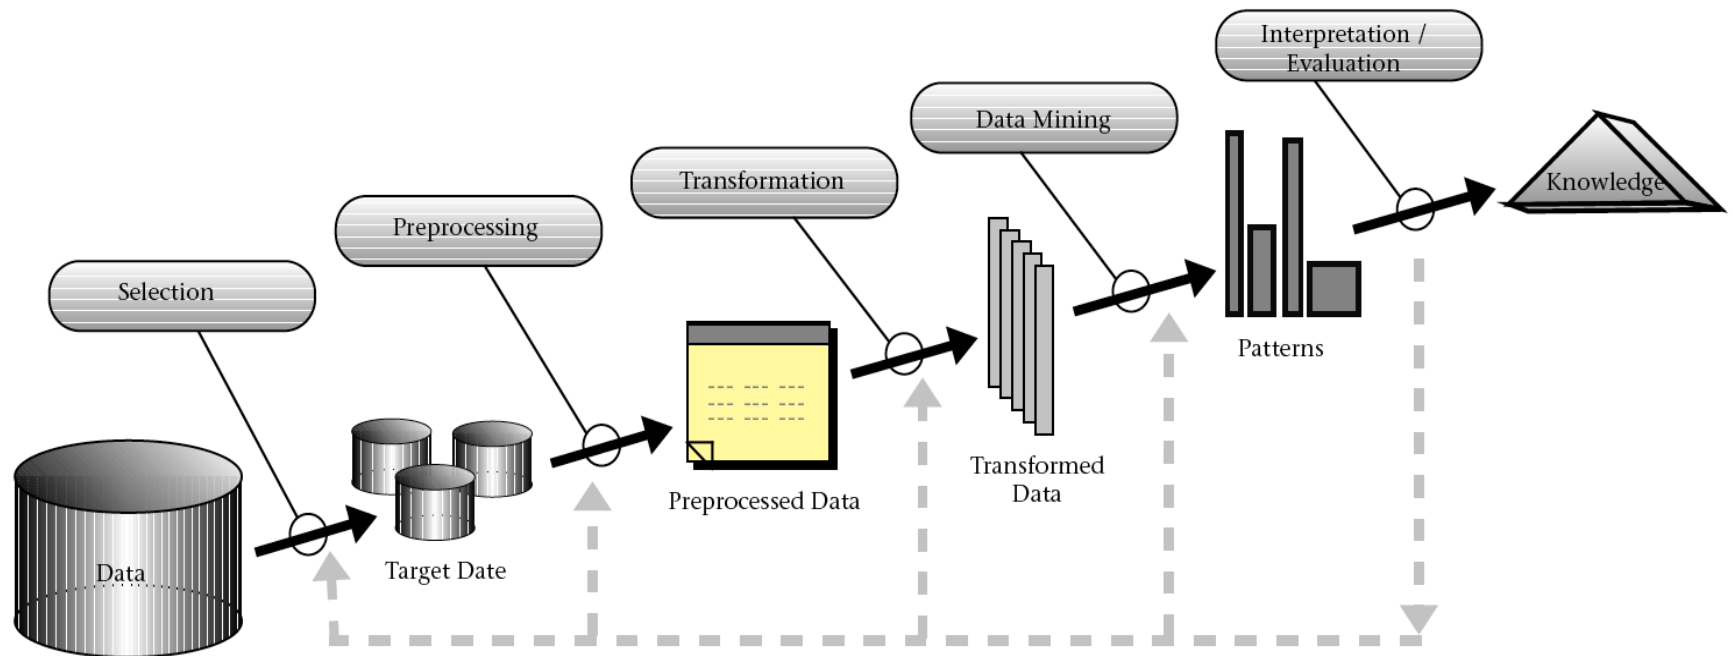

Source: Fayyad et al. (1996)

Data Preprocessing

- Your data may have some problems
 - i.e., it may be problematic for the subsequent mining steps
- Fix those problems before going on
- Which problems can you think of?



Data Preprocessing

- Problems that you may have with your data
 - Errors
 - Missing values
 - Unbalanced distribution
 - False predictors
 - Unsupported data types
 - High dimensionality

Errors in Data


- Sources
 - malfunctioning sensors
 - errors in manual data processing (e.g., twisted digits)
 - storage/transmission errors
 - encoding problems, misinterpreted file formats
 - bugs in processing code
 - ...



Image: <http://www.flickr.com/photos/16854395@N05/3032208925/>

Errors in Data

- Simple remedy
 - remove data points outside a given interval
 - this requires some domain knowledge
- Advanced remedies
 - automatically find suspicious data points
 - see lecture “Anomaly Detection”

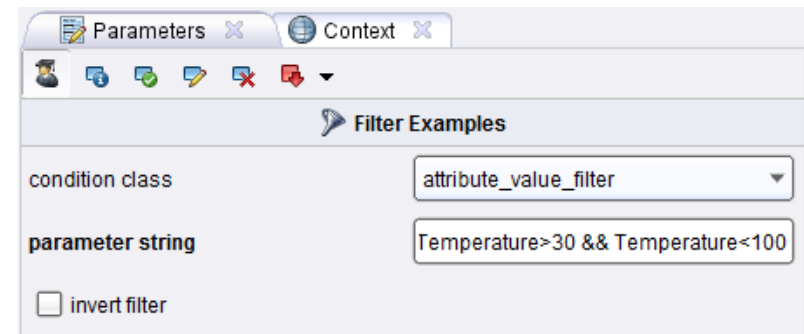

Missing Values

- Possible reasons
 - Failure of a sensor
 - Data loss
 - Information was not collected
 - Customers did not provide their age, sex, marital status, ...
 - ...



Missing Values

- Treatments
 - Ignore records with missing values in training data
 - Replace missing value with...
 - default or special value (e.g., 0, “missing”)
 - average/median value for numerics
 - most frequent value for nominals
 - Try to predict missing values:
 - handle missing values as learning problem
 - target: attribute which has missing values
 - training data: instances where the attribute is present
 - test data: instances where the attribute is missing
 - Practical note: in RapidMiner, use two *Impute Missing Values* operators
 - one for nominal, one for numerical data



Missing Values

- Note: values may be missing for various reasons
 - ...and, more importantly: at random vs. not at random
- Examples for not random
 - Non-mandatory questions in questionnaires
 - “how often do you drink alcohol?”
 - Values that are only collected under certain conditions
 - e.g., final grade of your university degree (if any)
 - Sensors failing under certain conditions
 - e.g., at high temperatures
- In those cases, averaging and imputation causes information loss
 - In other words: “missing” can be information!

Unbalanced Distribution

- Example:
 - learn a model that recognizes HIV
 - given a set of symptoms
- Data set:
 - records of patients who were tested for HIV
- Class distribution:
 - 99.9% negative
 - 0.01% positive



Unbalanced Distribution

- Learn a decision tree
- Purity measure: Gini index
- Recap: Gini index for a given node t :

$$GINI(t) = 1 - \sum_j [p(j|t)]^2$$

– (NOTE: $p(j|t)$ is the relative frequency of class j at node t).

- Here, Gini index of the top node is

$$1 - 0.999^2 - 0.001^2 = 0.002$$

- It will be hard to find any splitting that significantly improves the purity

Decision tree learned:



false

Unbalanced Distribution

- Model has very high accuracy
 - 99.9%
- ...but 0 recall/precision on positive class
 - which is what we were interested in
- Remedy
 - re-balance dataset for training
 - but evaluate on unbalanced dataset!


Decision tree learned:

false

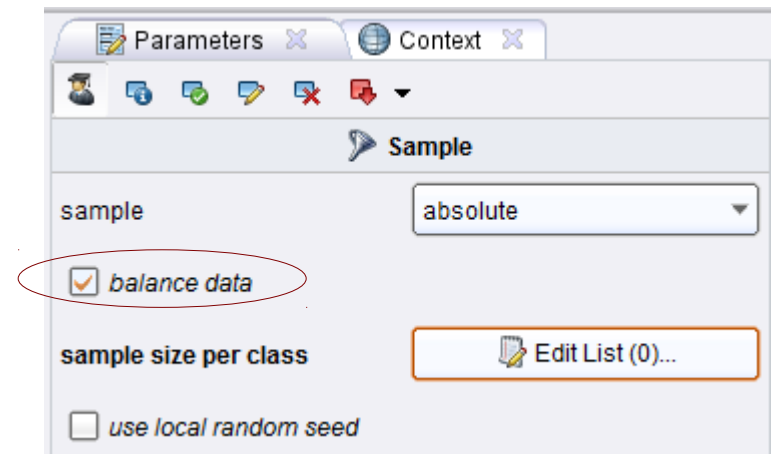

False Predictors

- ~100% accuracy are a great result
 - ...and a result that should make you suspicious!
- A tale from the road
 - working with our Linked Open Data extension
 - trying to predict the world university rankings
 - with data from DBpedia
- Goal:
 - understand what makes a top university

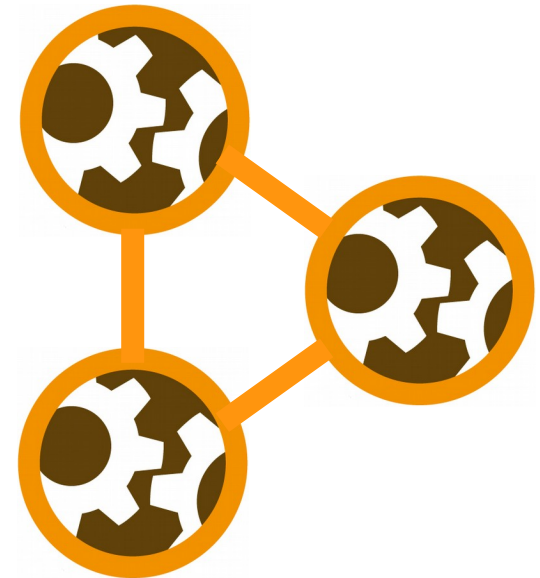

False Predictors

- The Linked Open Data extension
 - extracts additional attributes from Linked Open Data
 - e.g., DBpedia
 - unsupervised (i.e., attributes are created fully automatically)
- Model learned: $THE < 20 \rightarrow TOP = true$
 - false predictor: target variable was included in attributes
- Other examples
 - $mark < 5 \rightarrow passed = true$
 - $sales > 1000000 \rightarrow bestseller = true$



Recognizing False Predictors

- By analyzing models
 - rule sets consisting of only one rule
 - decision trees with only one node
- Process: learn model, inspect model, remove suspect, repeat
 - until the accuracy drops
 - Tale from the road example: there were other indicators as well
- By analyzing attributes
 - compute correlation of each attribute with label
 - correlation near 1 (or -1) marks a suspect
- Caution: there are also strong (but not false) predictors
 - it's not always possible to decide automatically!



Unsupported Data Types

- Not every learning operator supports all data types
 - some (e.g., ID3) cannot handle numeric data
 - others (e.g., SVM) cannot nominal data
 - dates are difficult for most learners
- Solutions
 - convert nominal to numeric data
 - convert numeric to nominal data (discretization, binning)
 - extract valuable information from dates

Conversion: Binary to Numeric

- Binary fields
 - E.g. student=yes,no
- Convert to Field_0_1 with 0, 1 values
 - student = yes → student_0_1 = 0
 - student = no → student_0_1 = 1


Conversion: Ordered to Numeric

- Some nominal attributes incorporated an *order*
- Ordered attributes (e.g. grade) can be converted to numbers preserving natural order, e.g.
 - A → 4.0
 - A- → 3.7
 - B+ → 3.3
 - B → 3.0
- Using such a coding schema allows learners to learn valuable rules, e.g.
 - `grade>3.5 → excellent_student=true`

Conversion: Nominal to Numeric

- Multi-valued, unordered attributes with small no. of values
 - e.g. Color=Red, Orange, Yellow, ..., Violet
 - for each value v , create a binary “flag” variable C_v , which is 1 if Color= v , 0 otherwise

ID	Color	...
371	red	
433	yellow	




ID	C_red	C_orange	C_yellow	...
371	1	0	0	
433	0	0	1	

Conversion: Nominal to Numeric

- Many values:
 - US State Code (50 values)
 - Profession Code (7,000 values, but only few frequent)
- Approaches:
 - manual, with background knowledge
 - e.g., group US states
- Use binary attributes
 - then apply dimensionality reduction (see later today)




Discretization: Equal-width

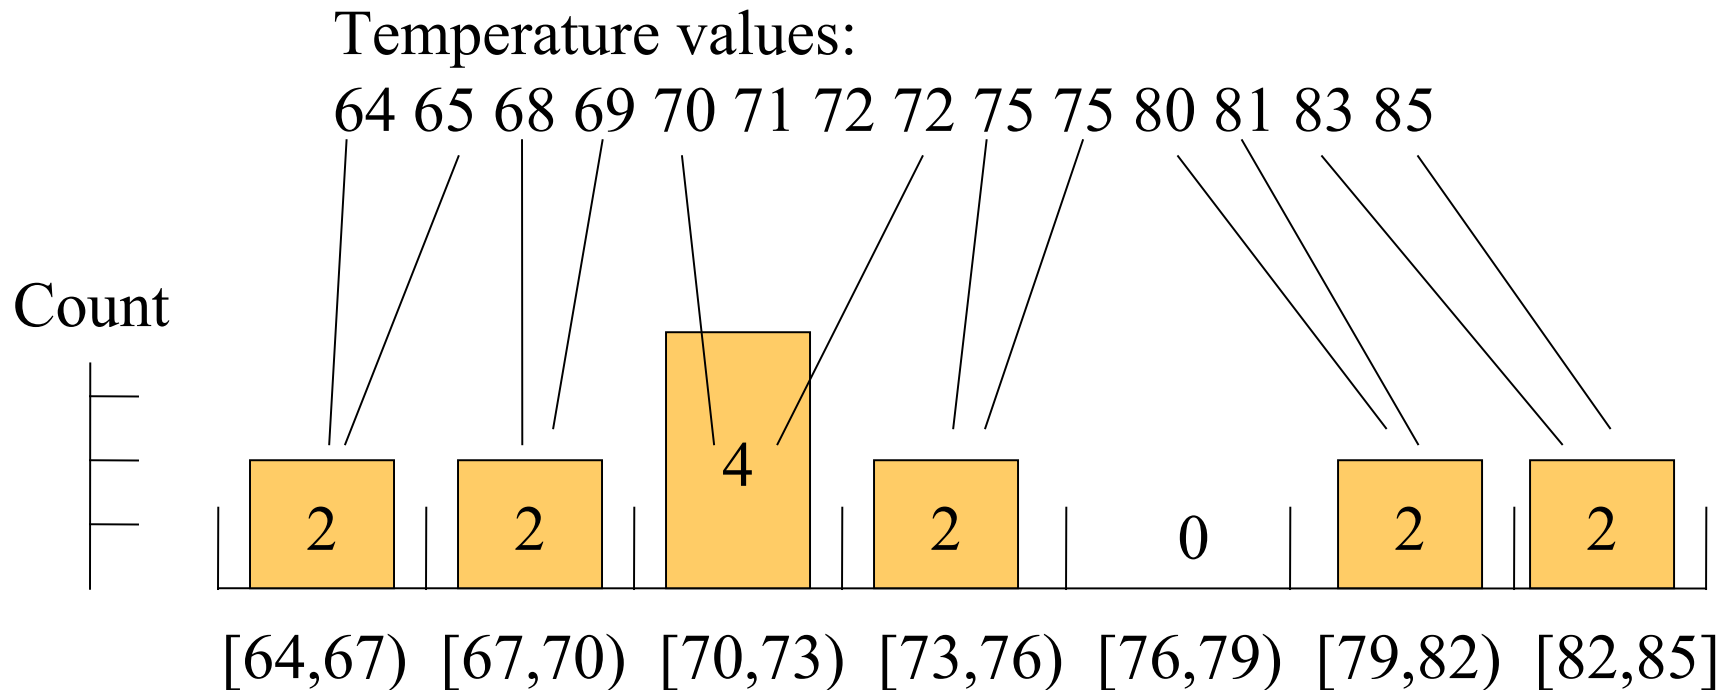

Equal Width, bins $\text{Low} \leq \text{value} < \text{High}$

Discretization: Equal-width

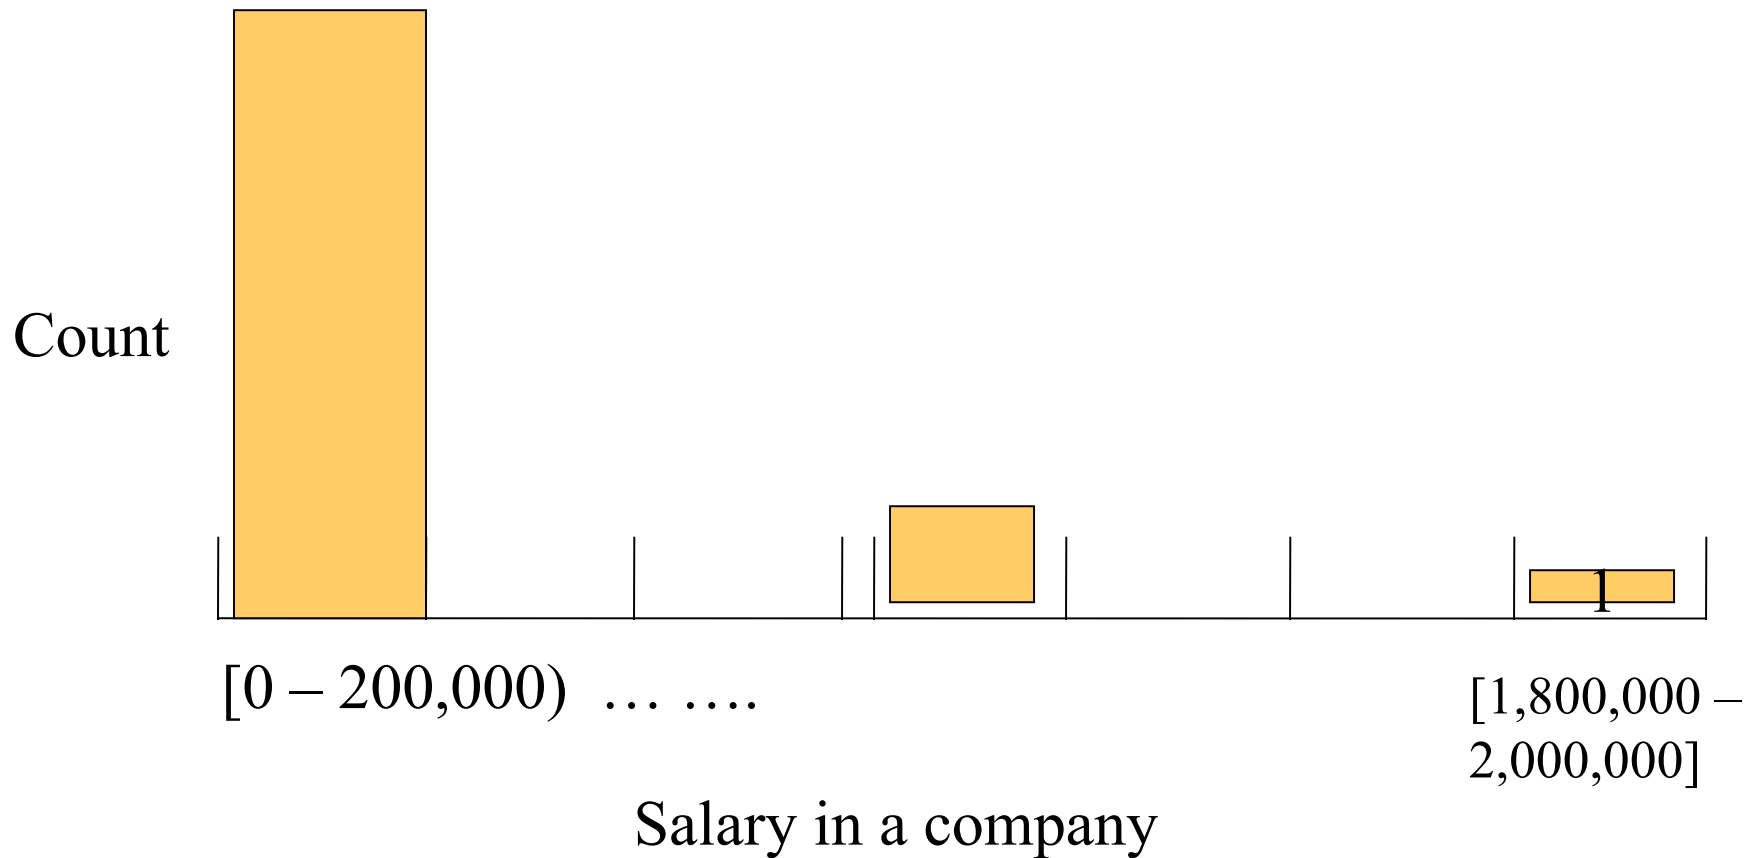


Discretization: Equal-height

Temperature values:

64 65 68 69 70 71 72 72 75 75 80 81 83 85

Count

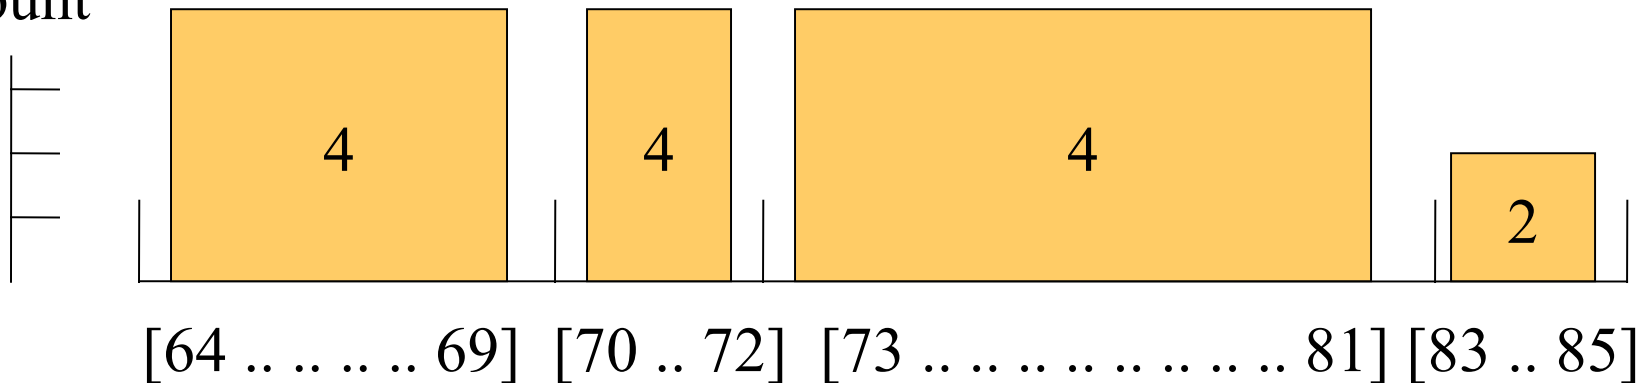

Equal Height = 4, except for the last bin

Discretization by Entropy


- Top-down approach
- Tries to minimize the entropy in each bin
 - Entropy: $-\sum p(x)\log(p(x))$
 - where the x are all the attribute values
- Goal
 - make intra-bin similarity as high as possible
 - a bin with only equal values has entropy=0
- Algorithm
 - Split into two bins so that overall entropy is minimized
 - Split each bin recursively as long as entropy decreases significantly

Discretization: Training and Test Data

- Training and test data have to be equally discretized!
- Learned rules:
 - income=high → give_credit=true
 - income=low → give_credit=false
- Applying rules
 - income=low has to have the same semantics on training and test data!
 - Naively applying discretization will lead to different ranges!


Discretization: Training and Test Data

- Wrong:

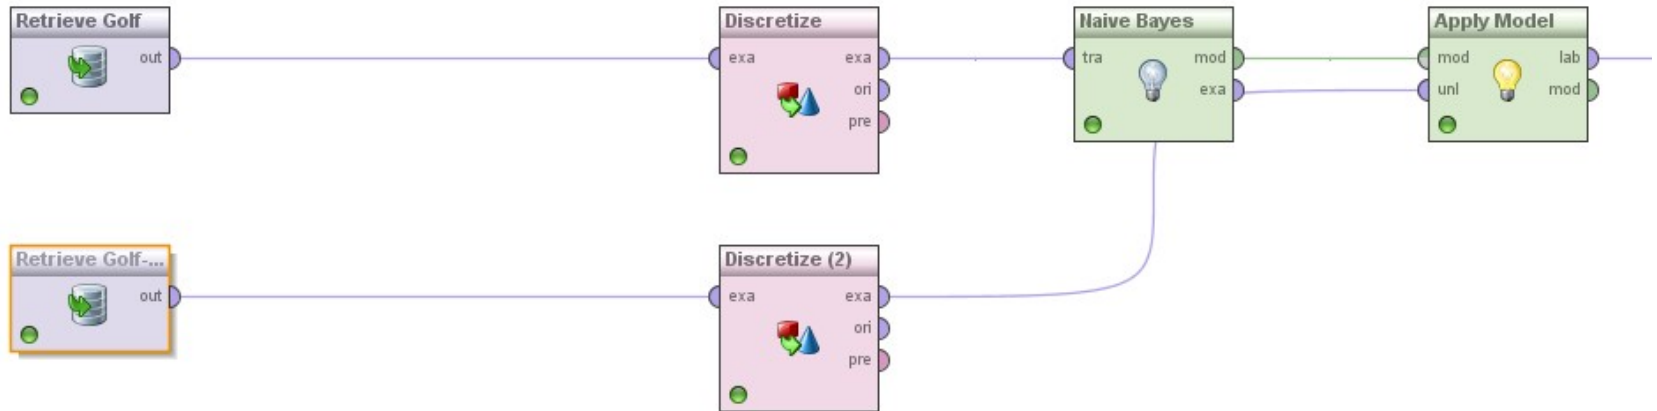

Discretization: Training and Test Data

- Right:

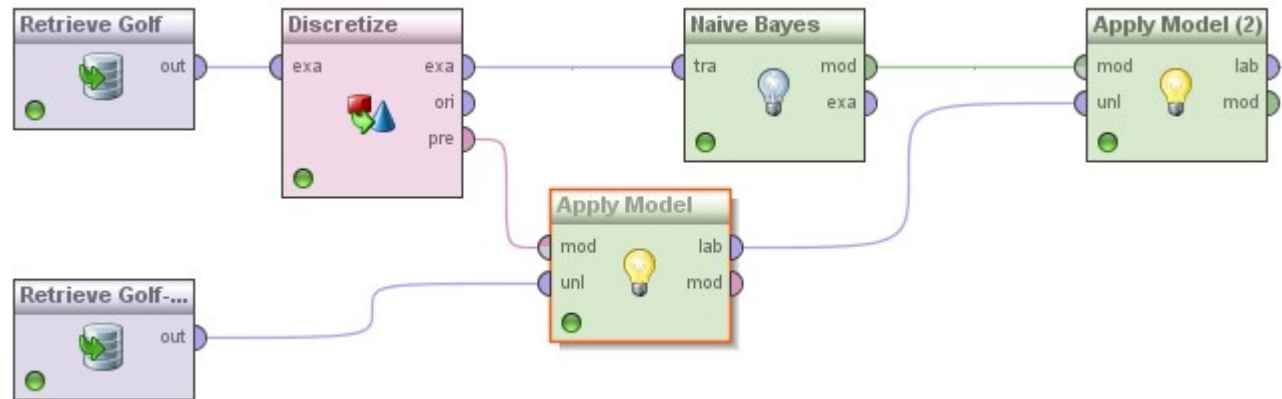

- Accuracy in this example, using equal frequency (three bins):
 - wrong: 42.7% accuracy
 - right: 50% accuracy


Dealing with Date Attributes

- Dates (and times) can be formatted in various ways
 - first step: normalize and parse
- Dates have lots of interesting information in them
- Example: analyzing shopping behavior
 - time of day
 - weekday vs. weekend
 - begin vs. end of month
 - month itself
 - quarter, season
- RapidMiner has operators for extracting that information
 - either as numeric or nominal values



High Dimensionality

- Datasets with large number of attributes
- Examples:
 - text classification
 - image classification
 - genome classification
 - ...
- (not only a) scalability problem
 - e.g., decision tree: search all attributes for determining one single split

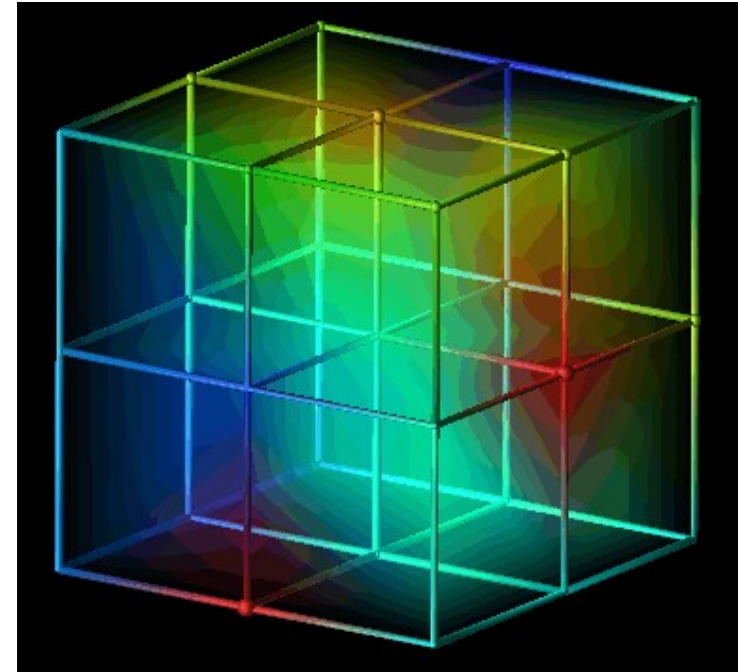

Curse of Dimensionality

- Learning models gets more complicated in high-dimensional spaces
- Higher number of observations are needed
 - For covering a meaningful number of combinations
 - “Combinatorial Explosion”
- Distance functions collapse
 - i.e., all distances converge in high dimensions
 - Nearest neighbor classifiers are no longer meaningful

$$euclidean\ distance = \sqrt{\sum_{k=1}^n (p_k - q_k)^2}$$

Feature Subset Selection

- Preprocessing step
- Idea: only use valuable features
 - “feature”: machine learning terminology for “attribute”
- Basic heuristics: remove nominal attributes...
 - which have more than $p\%$ identical values
 - example: millionaire=false
 - which have more than $p\%$ different values
 - example: names, IDs
- Basic heuristics: remove numerical attributes
 - which have little variation, i.e., standard deviation $< s$




Feature Subset Selection

- Basic Distinction: Filter vs. Wrapper Methods
- Filter methods
 - Use attribute weighting criterion, e.g., Information Gain
 - Select attributes with highest weights
 - Fast (linear in no. of attributes), but not always optimal



Feature Subset Selection

- Remove redundant attributes
 - e.g., temperature in °C and °F
 - e.g., textual features “Barack” and “Obama”
- Method:
 - compute pairwise correlations between attributes
 - remove highly correlated attributes

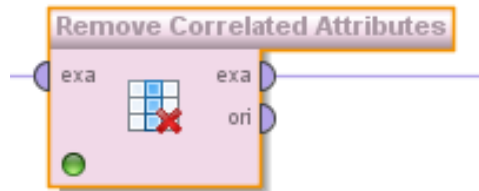

- Recap:
 - Naive Bayes requires independent attributes
 - Will benefit from removing correlated attributes


Feature Subset Selection

- Wrapper methods
 - Use classifier internally
 - Run with different feature sets
 - Select best feature set
- Advantages
 - Good feature set for given classifier
- Disadvantages
 - Expensive (naively: at least quadratic in number of attributes)
 - Heuristics can reduce number of classifier runs

Feature Subset Selection

- Forward selection:

```
start with empty attribute set
do {
  for each attribute {
    add attribute to attribute set
    compute performance (e.g., accuracy)
  }
  use attribute set with best performance
} while performance increases
```

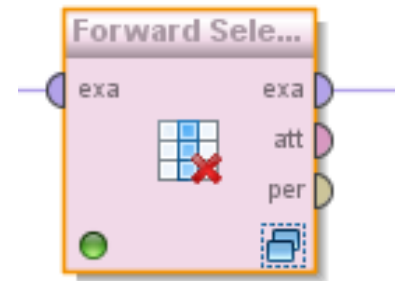


- An learning algorithm is used for computing the performance
 - cross validation is advised

Feature Subset Selection

- Searching for optimal attribute sets

- Backward elimination:


```
start with full attribute set
do {
  for each attribute in attribute set {
    remove attribute to attribute set
    compute performance (e.g., accuracy)
  }
  use attribute set with best performance
} while performance increases
```

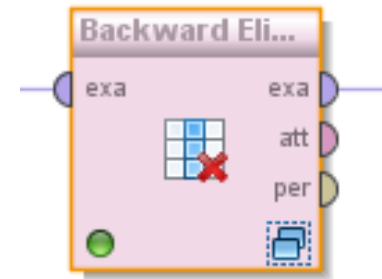

- An learning algorithm is used for computing the performance
 - cross validation is advised

Feature Subset Selection

- The checkerboard example revisited
 - Recap: Rule learners can perfectly learn this!
 - But what happens if we apply forward selection here?

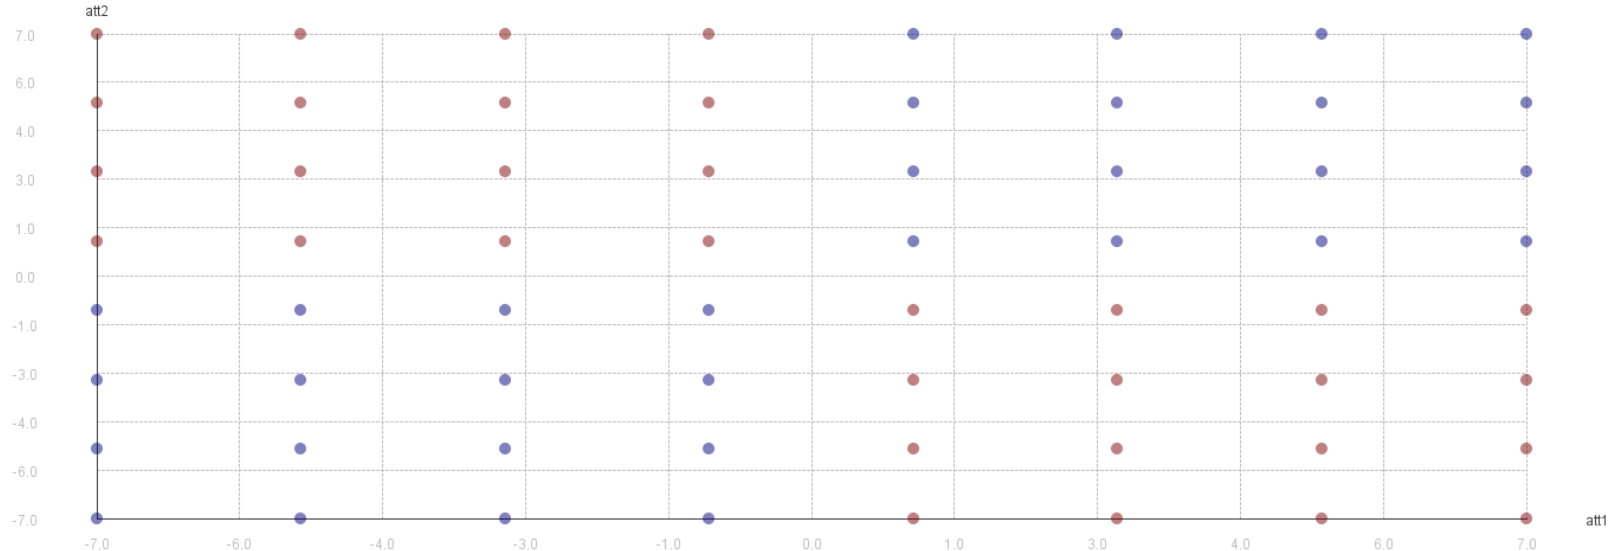


Feature Subset Selection

- Further approaches
 - Brute Force search
 - Evolutionary algorithms
(will be covered in parameter optimization session)
- Trade-off
 - simple heuristics are fast
 - but may not be the most effective
 - brute-force is most effective
 - but the slowest
 - forward selection, backward elimination, and evolutionary algorithms
 - are often a good compromise

Recap: Overfitting


- Example: predict credit rating
 - possible decision tree:

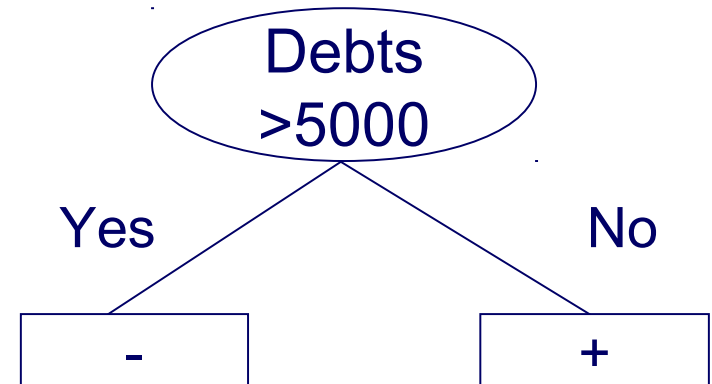

Name	Net Income	Job status	Debts	Rating
John	40000	employed	0	+
Mary	38000	employed	10000	-
Stephen	21000	self-employed	20000	-
Eric	2000	student	10000	-
Alice	35000	employed	4000	+

Recap: Overfitting



- Example: predict credit rating
 - alternative decision tree:

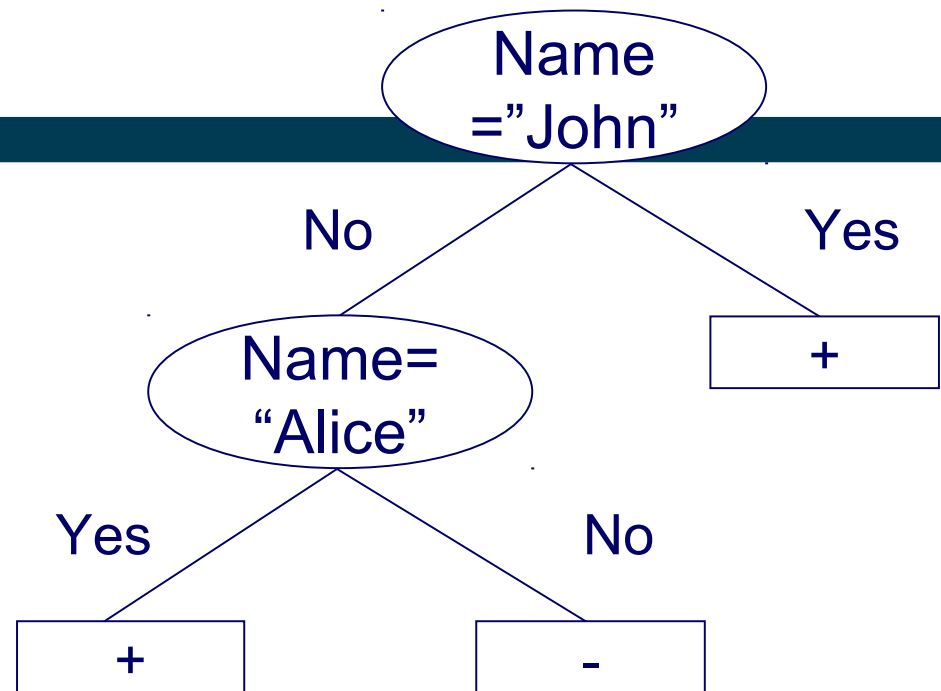

Name	Net Income	Job status	Debts	Rating
John	40000	employed	0	+
Mary	38000	employed	10000	-
Stephen	21000	self-employed	20000	-
Eric	2000	student	10000	-
Alice	35000	employed	4000	+


Recap: Overfitting

- Both trees seem equally good
 - Classify all instances in the training set correctly
 - Which one do you prefer?

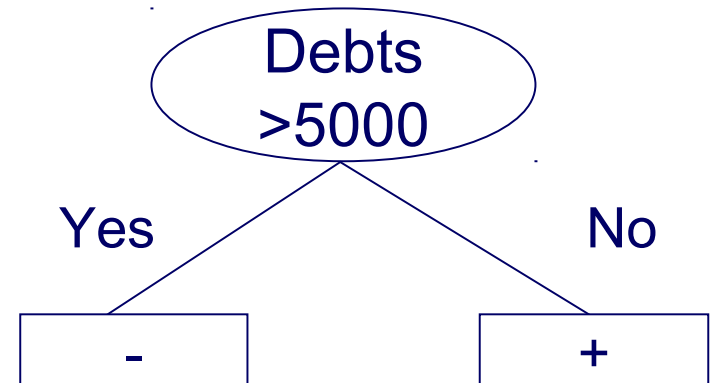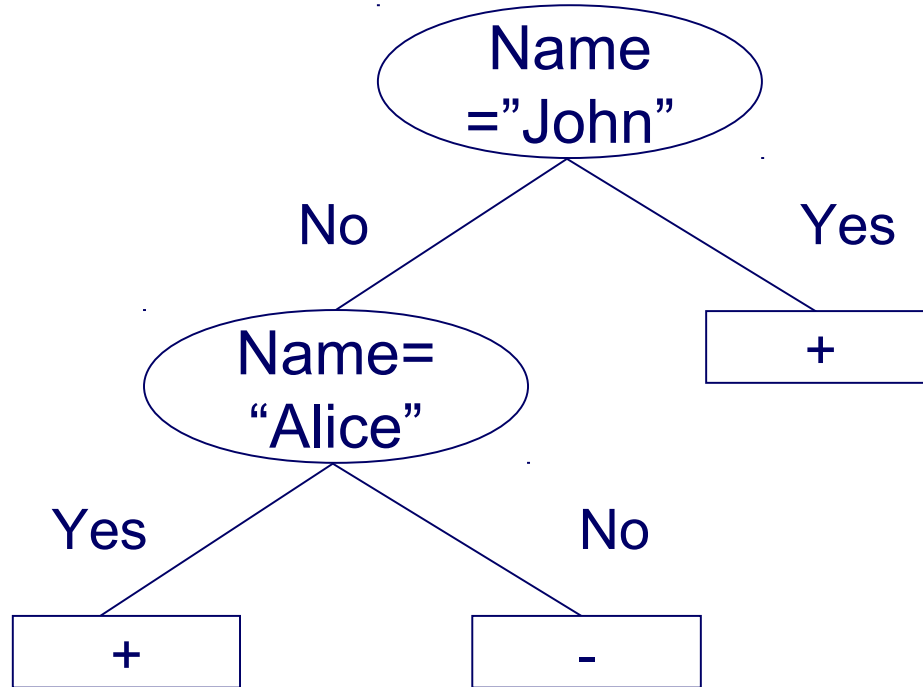


Recap: Overfitting

- Overfitting can happen with feature subset selection, too
 - Here, *name* seems to be a useful feature
 - ...but is it?
- Remedies
 - Hard for filtering methods
 - e.g., *name* has highest information gain!
 - Wrapper methods:
 - use cross validation inside!

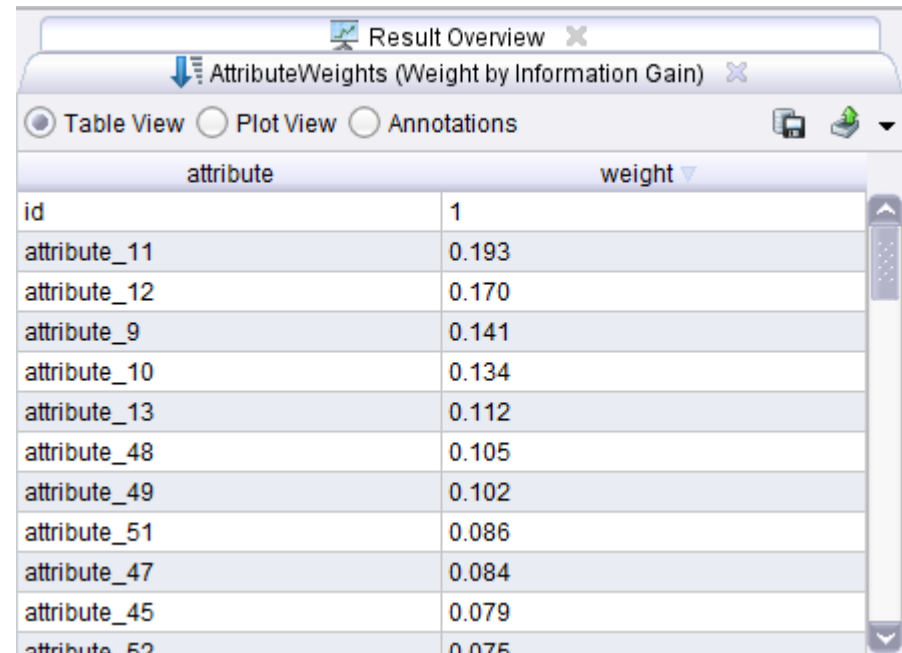


The screenshot shows a software interface window titled 'Result Overview'. Below the title bar is a tab labeled 'AttributeWeights (Weight by Information Gain)'. There are three radio buttons for 'Table View' (selected), 'Plot View', and 'Annotations'. Below these are icons for saving and refreshing. The main area is a table with two columns: 'attribute' and 'weight'. The table lists various attributes and their corresponding weights, with 'id' having the highest weight of 1.

attribute	weight
id	1
attribute_11	0.193
attribute_12	0.170
attribute_9	0.141
attribute_10	0.134
attribute_13	0.112
attribute_48	0.105
attribute_49	0.102
attribute_51	0.086
attribute_47	0.084
attribute_45	0.079
attribute_52	0.075

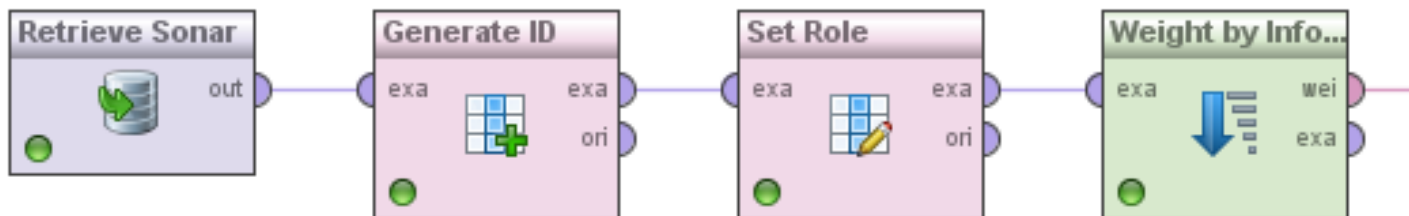

Principal Component Analysis (PCA)

- So far, we have looked at feature selection methods
 - we select a subset of attributes
 - no new attributes are created
- PCA creates a (smaller set of) new attributes
 - artificial linear combinations of existing attributes
 - as expressive as possible
- Dates back to the pre-computer age
 - invented by Karl Pearson (1857-1936)
 - also known for Pearson's correlation coefficient

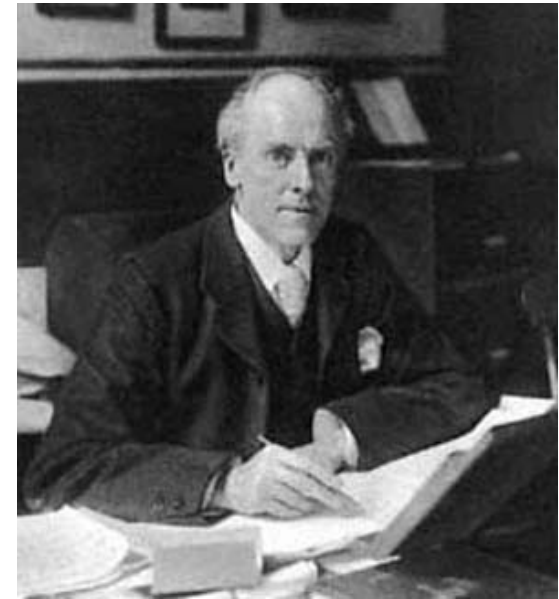

Principal Component Analysis (PCA)



- Idea: transform coordinate system so that each new coordinate (principal component) is as expressive as possible
 - expressivity: variance of the variable
 - the 1st, 2nd, 3rd... PC should account for as much variance as possible
 - further PCs can be neglected



<http://setosa.io/ev/principal-component-analysis/>


Principal Component Analysis

- Method used for computation:
 - Compute covariance matrix
 - Perform eigenvector factorization
 - See lecture: “Data Mining and Matrices”

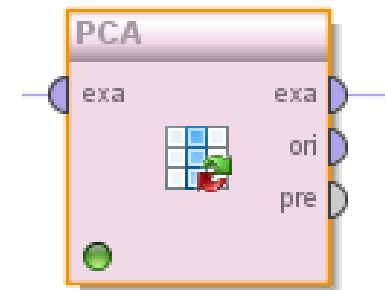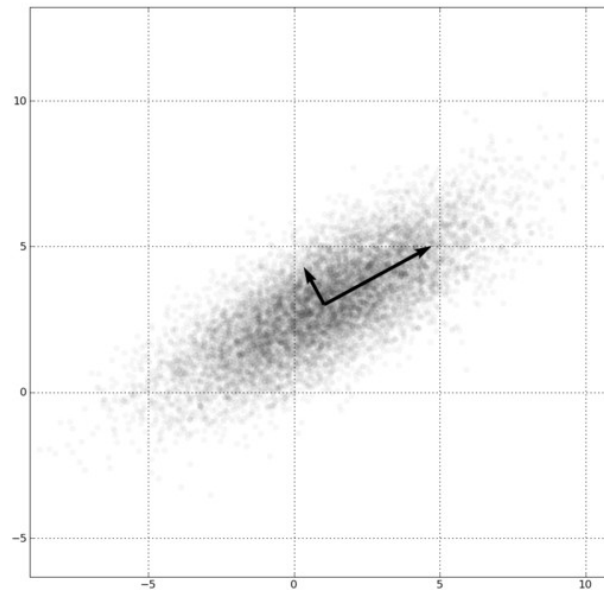


Principle Component Analysis illustrated

- Example by James X. Li, 2009
- Which 2D projection conveys most information about the teapot?

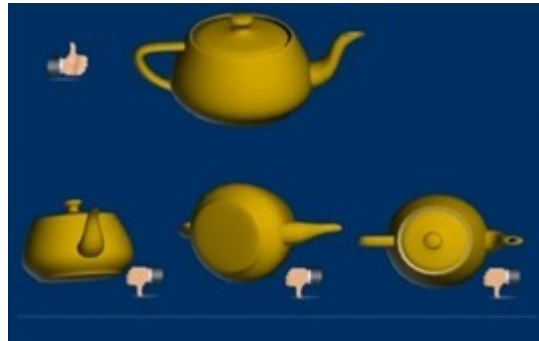

Approach:

- find longest axis first
 - in practice: use average/median diameter to limit effect of outliers
- fix that axis, find next longest

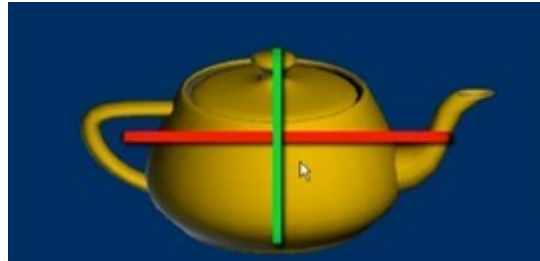

Sampling

- Feature Subset Selection reduces the *width* of the dataset
- Sampling reduces the *height* of the dataset
 - i.e., the number of instances
- Trade-off
 - Maximum usage of information
 - Fast computation
- Notes
 - *Stratified* sampling respects class distribution
 - *Kennard-Stone* sampling tries to select heterogenous points

Kennard-Stone Sampling

- 1) Compute pairwise distances of points
 - 2) Add points with largest distance from one another
 - 3) While target sample size not reached
 - 1) For each candidate, find smallest distance to any point in the sample
 - 2) Add candidate with largest smallest distance
- This guarantees that heterogeneous data points are added
 - i.e., sample gets more diverse
 - includes more corner cases
 - but potentially also more outliers
 - distribution may be altered

Sampling Strategies and Learning Algorithms

- There are interaction effects
- Some learning algorithms rely on distributions
 - e.g., Naive Bayes
 - usually, stratified sampling works better
- Some rely less on distributions
 - and may work better if they see more corner cases
 - e.g., Decision Trees

Titanic Dataset
Filter: 50 training examples

	Decision Tree	Naive Bayes
Stratified	.727	.752
Kennard Stone	.742	.721


A Note on Sampling

- Often, the training data in a real-world project is already a sample
 - e.g., sales figures of last month
 - to predict the sales figures for the rest of the year
- How representative is that sample?
 - What if last month was December? Or February?
- Effect known as *selection bias*
 - Example: phone survey with 3,000 participants, carried out Monday, 9-17
 - Thought experiment: effect of selection bias for prediction, e.g., with a Naive Bayes classifier

Summary Data Preprocessing

- Raw data has many problems
 - missing values
 - errors
 - high dimensionality
 - ...
- Good preprocessing is essential for good data mining
 - one of the first steps in the pipeline
 - requires lots of experimentation and fine-tuning
 - often the most time consuming step of the pipeline

Recap: The Data Mining Process

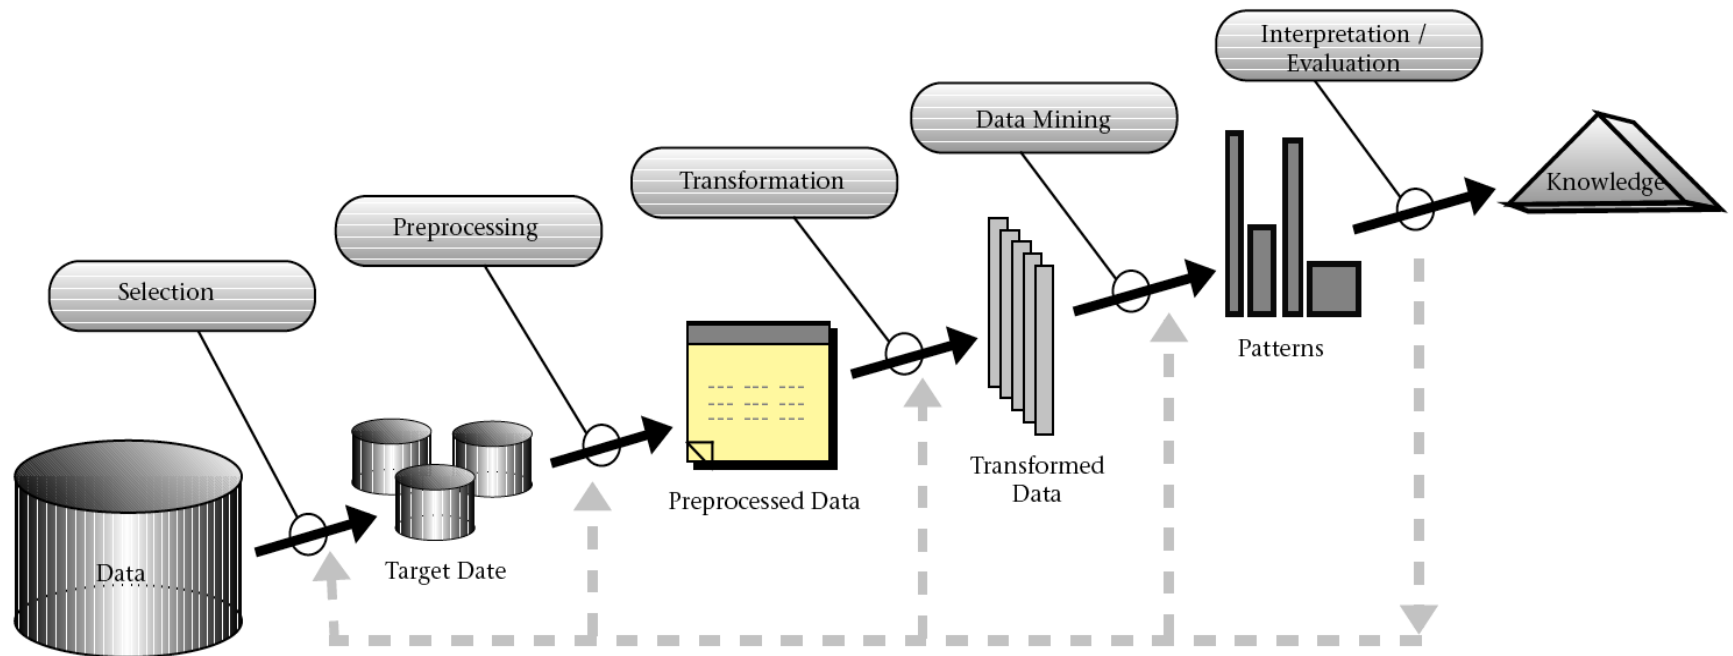

Source: Fayyad et al. (1996)

Questions?

