

**Knowledge Graphs
Web Ontology Language (OWL)**



Previously on “Knowledge Graphs”

- Back to the lecture on RDF Schema
- We have the following statement:
 - "Madrid is the capital of Spain."
- We can get the following information:
 - "Madrid is the capital of Spain." ✓
 - "Spain is a state." ✓
 - "Madrid is a city." ✓
 - "Madrid is located in Spain." ✓
 - "Barcelona is not the capital of Spain." ✗
 - "Madrid is not the capital of France" ✗
 - "Madrid is not a state." ✗
 - ...



Previously on “Knowledge Graphs”

- What we cannot express (up to now):
 - “Every state has *exactly one* capital”
 - Property cardinalities
 - “Every city can only be the capital of one state.”
 - Functional properties
 - “A city cannot be a state at the same time.”
 - Class disjointness
 - ...
- For those, we need more expressive languages than RDFS!



Previously on “Knowledge Graphs”

- We have learned about ontologies
 - and RDF Schema as a language for building simple ontologies
- With RDF Schema, we can express some knowledge about a domain
 - but not everything, e.g., cardinalities
 - we cannot produce contradictions
 - we cannot circumvent the Non Unique Naming Assumption
 - we cannot circumvent the Open World Assumption
 - ...




Semantic Web Technology Stack



here be dragons...

Semantic Web Technologies
(This lecture)

Technical Foundations

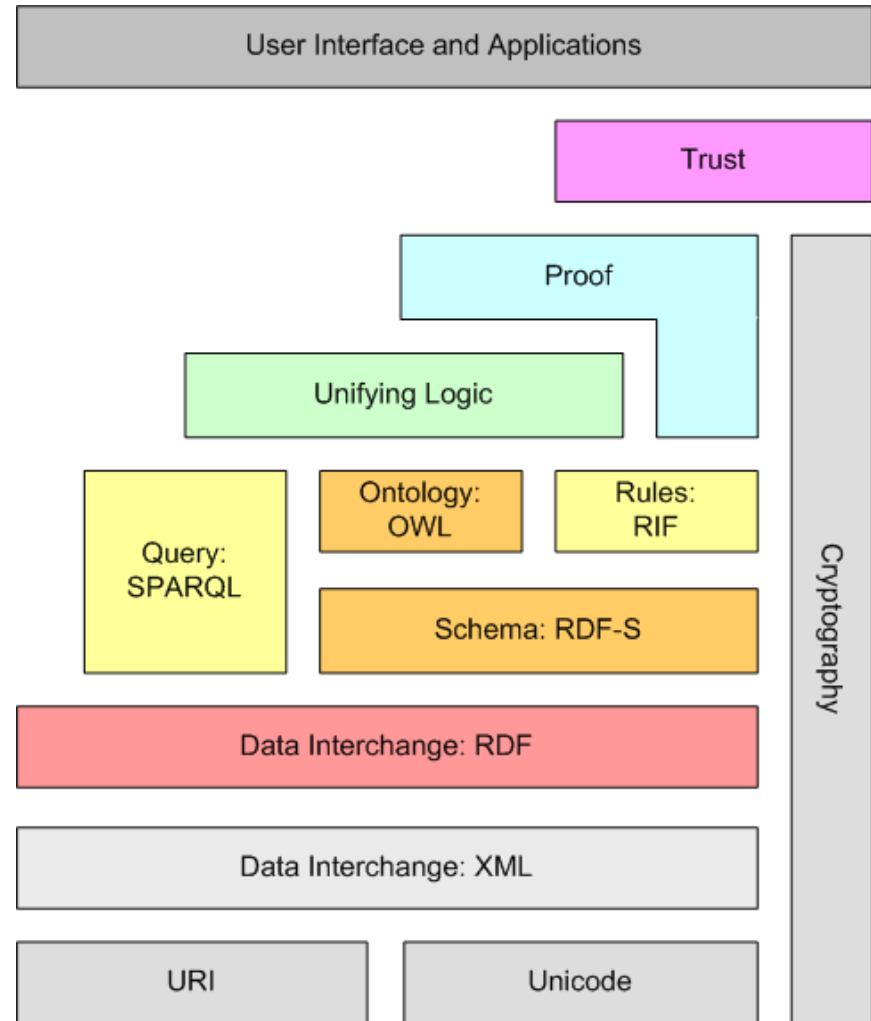

Berners-Lee (2009): *Semantic Web and Linked Data*
<http://www.w3.org/2009/Talks/0120-campus-party-tbl/>

Web Ontology Language (OWL)

- Hey, wait...




Web Ontology Language (OWL)

- More powerful than RDF Schema
- W3C Standard (2004), OWL2 (2009)
- Trade-off:
 - Expressive power
 - Complexity of reasoning
 - Decidability
- Solution: different variants of OWL, e.g.,
 - OWL Lite, OWL DL, OWL Full
 - Profiles in OWL2



Web Ontology Language (OWL)

- Three variants
 - increasing expressive power
 - backwards compatible
 - each OWL Lite ontology is valid in OWL DL and OWL Full
 - each OWL DL ontology is valid in OWL Full

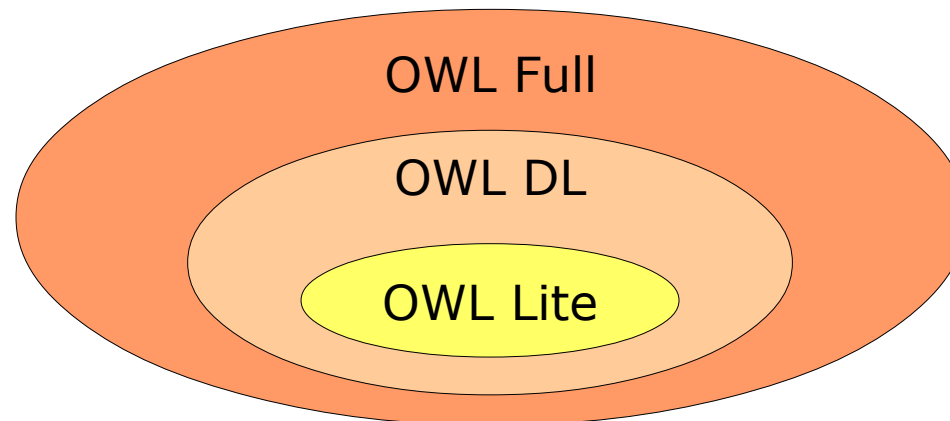

OWL and RDF Schema

- both are based on RDF
 - OWL ontologies can also be expressed in RDF
 - as triples or in XML notation
- Compatibility
 - OWL Lite and OWL DL are not fully compatible to RDF Schema
 - but reuse some parts of RDF Schema
 - OWL Full and RDF Schema are fully compatible

OWL: Classes

- Basic concept (`owl:Class`)
- Subclasses as we know them from RDFS: `rdfs:subClassOf`
 - In particular, the following holds:
`owl:Class rdfs:subClassOf rdfs:Class .`
- Two predefined classes:
 - `owl:Thing`
 - `owl:Nothing`
- For each class `c`, the following axioms hold:
 - `c rdfs:subClassOf owl:Thing .`
 - `owl:Nothing rdfs:subClassOf c .`

OWL: Classes

- Classes can be intersections of others:

```
:SwimmingMammals owl:intersectionOf  
  (:SwimmingAnimals :Mammals) .
```

- There are also set unions and set differences
 - but not in OWL Lite

OWL: Properties

- RDF Schema does not distinguish literal and object valued properties:

```
:name a rdf:Property .  
:name rdfs:range xsd:string .
```

```
:knows a rdf:Property .  
:knows rdfs:range foaf:Person .
```

- Without specifying the range, “dual use” of an RDF property is not forbidden:

```
:peter :knows :john .  
:peter :knows "mary" .
```

OWL: Properties

- RDF Schema does not distinguish literal and object valued properties:

```
:name a rdf:Property .  
:name rdfs:range xsd:string .
```

```
:knows a rdf:Property .  
:knows rdfs:range foaf:Person .
```

- In contrast, OWL distinguishes

- owl:DatatypeProperty
- owl:ObjectProperty

- The following axioms hold:

- owl:DatatypeProperty rdfs:subClassOf rdf:Property .
- owl:ObjectProperty rdfs:subClassOf rdf:Property .

OWL: Properties

- As in RDF Schema, there can be hierarchies and domains/ranges:

```
:capitalOf rdfs:subPropertyOf :locatedIn .
```

- Domain

- only classes for OWL Lite, classes or restrictions* for OWL DL/Full

```
:name rdfs:domain foaf:Person .
```

- Range

- XML Datatypes for owl:DatatypeProperty

```
:name rdfs:range xsd:string .
```

- Classes or restrictions* for owl:ObjectProperty

```
:knows rdfs:range foaf:Person .
```

* we'll get there soon

Equality and Inequality (1)

- Equality between individuals
 - Allows using multiple definitions/descriptions of an entity
 - in other datasets as well
 - solves some problems of the Non unique naming assumption

```
:Muenchen owl:sameAs :Munich .
```

- We have seen this used for Linked Open Data
 - as a means to establish links between datasets

```
myDataset:Mannheim owl:sameAs dbpedia:Mannheim .
```

Equality and Inequality (2)

- Equality between classes and properties
 - allows for relations between datasets on the schema level
 - gives way to more complex constructs

```
:UniversityTeachers owl:equivalentClass :Lecturers .  
:teaches owl:equivalentProperty :lecturerFor .
```

- Also useful for Linked Open Data:

```
dc:creator owl:equivalentProperty foaf:maker .
```


Equality and Inequality (3)

- Inequality between individuals
 - Allows some useful reasoning
 - as we will see soon

```
:Muenchen owl:differentFrom :Hamburg .
```

- Shorthand notation for multiple entities:

```
owl:AllDifferent owl:distinctMembers  
  (:Munich :Hamburg :Berlin :Darmstadt :Mannheim) .
```

Why owl:sameAs, owl:equivalentClass, etc.?

- In OWL (Lite+DL), we must not mix classes, properties, and instances
- owl:sameAs has owl:Thing as domain/range
- owl:equivalentClass has rdfs:Class as domain/range
 - recap: owl:Class rdfs:subClassOf rdfs:Class
- owl:equivalentProperty has rdf:Property as domain/range
 - owl:ObjectProperty rdfs:subClassOf rdf:Property
 - owl:DatatypeProperty rdfs:subClassOf rdf:Property



Special Properties in OWL


- Symmetric Properties

```
:sitsOppositeOf a owl:SymmetricProperty .  
  :Tom :sitsOppositeOf :Sarah .  
→:Sarah :sitsOppositeOf :Tom .
```




- Inverse Properties

```
:supervises owl:inverseOf :supervisedBy .  
  :Tom :supervises :Julia .  
→:Julia :supervisedBy :Tom .
```



- Transitive Properties

```
:hasOfficeMate a owl:TransitiveProperty .  
  :Tom :hasOfficeMate :Jon . :Jon :hasOfficeMate :Kim .  
→:Tom :hasOfficeMate :Kim .
```



Special Properties introduced with OWL2

- Reflexive, irreflexive, and asymmetric properties

- Everybody is a relative of him/herself

`:relativeOf a owl:ReflexiveProperty .`




- Nobody can be his/her own parent

`:parentOf a owl:IrreflexiveProperty .`



- If I am taller than you, you cannot be taller than me

`:tallerThan a owl:AsymmetricProperty .`



Restrictions on Property Types

- Only ObjectProperties may be transitive, symmetric, inverse, and reflexive
 - DataProperties may not be
- Why?
- *Previously on RDF:*
 - "Literals can only be objects, never subjects or predicates."


Restrictions on Property Types

- Assuming that

```
:samePerson a owl:DatatypeProperty .  
:samePerson rdfs:range xsd:string .  
:samePerson a owl:SymmetricProperty .
```

```
:Peter :samePerson "Peter" .
```

```
→ "Peter" :samePerson :Peter .
```




Restrictions on Property Types

- Assuming that

```
:hasName a owl:DatatypeProperty .  
:hasName rdfs:range xsd:string .  
:hasName owl:inverseOf :nameOf .
```

```
:Peter :hasName "Peter" .
```

```
→ "Peter" :nameOf :Peter .
```



Restrictions on Property Types

- `owl:TransitiveProperty` is also restricted to `ObjectProperties`

```
:hasPseudonym a owl:DatatypeProperty .  
:hasPseudonym rdfs:range xsd:string .  
:hasPseudonym a owl:TransitiveProperty .
```

```
:Thomas :hasPseudonym "Dr. Evil" .
```

```
+ "Dr. Evil" :hasPseudonym "Skullhead" .
```

```
→ :Thomas :hasPseudonym "Skullhead" .
```



- Which statement would we need here to make the conclusion via the `owl:TransitiveProperty`?

Functional Properties

- Usage

```
:hasCapital a owl:FunctionalProperty
:Finland :hasCapital :Helsinki .
:Finland :hasCapital :Helsingfors .
→:Helsinki owl:sameAs :Helsingfors .
```

- Interpretation

- if A and B are related via fp
- and A and C are related via fp
- then, B and C are equal

- simply speaking: $fp(x)$ is unique for each x
- “there can only be one”

<http://www.allmystery.de/dateien/uh60808,1274716100,highlander-christopher-lambert.jpg>



Inverse Functional Properties

- Usage

```
:capitalOf a owl:InverseFunctionalProperty .  
:Helsinki :capitalOf :Finland .  
:Helsingfors :capitalOf :Finland .  
→:Helsinki owl:sameAs :Helsingfors .
```

- Interpretation

- if A and C are in relation ifp
- and B and C are in relation ifp
- then, A and B are the same

- Simply speaking: ifp(x) is a unique identifier for x

- like a primary key in a database

Pooh!



- OWL is, in fact, more powerful
- ...but we can achieve lots with what we already learned
- Let's get back to the example...

Previously on “Knowledge Graphs”

- Let's look at that sentence:
 - "Madrid is the capital of Spain."
- We can get the following information:
 - "Madrid is the capital of Spain." ✓
 - "Spain is a state." ✓
 - "Madrid is a city." ✓
 - "Madrid is located in Spain." ✓
 - "Barcelona is not the capital of Spain." ✗
 - "Madrid is not the capital of France." ✗
 - "Madrid is not a state." ✗
 - ...



Expressive Ontologies using OWL

- "Barcelona is not the capital of Spain." ✘
- Why not?
 - Countries have exactly one capital
 - Barcelona and Madrid are not the same

- In OWL:

```
:capitalOf a owl:InverseFunctionalProperty .  
:Madrid :capitalOf :Spain .  
:Madrid owl:differentFrom :Barcelona .
```

```
ASK { :Barcelona :capitalOf :Spain . } → false
```

Expressive Ontologies using OWL

- "Madrid is not the capital of France." ✘
- Why not?
 - A city can only be the capital of one country
 - Spain and France are not the same

- Also:

```
:capitalOf a owl:FunctionalProperty .  
:Madrid :capitalOf :Spain .  
:Spain owl:differentFrom :France .
```

```
ASK { :Madrid :capitalOf :France . } → false
```

Restrictions

- Define characteristics of a class
 - A powerful and important concept in OWL
 - Example: Vegan recipes only contain vegetables as ingredients

```
:VeganRecipe rdfs:subClassOf :Recipe .  
:VeganRecipe rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :hasIngredient ;  
  owl:allValuesFrom :Vegetable .  
] .
```

Further Examples for Restrictions

- Every human as exactly one mother

```
:Human rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :hasMother ;  
  owl:cardinality 1^^xsd:integer .  
] .
```

- Bicycles are vehicles without a motor

```
:Bicycle rdfs:subClassOf :Vehicle .  
:Bicycle rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :hasMotor ;  
  owl:cardinality 0^^xsd:integer .  
] .
```


Restrictions vs. Ranges

- Restrictions are local to a class

```
:VeganRecipe rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :hasIngredient ;  
  owl:allValuesFrom :Vegetable .  
] .
```

- other classes may use `hasIngredient` with meat or fish


- Range: a global restriction

```
:hasIngredient rdfs:range :Food .
```

- this holds *once and for all* whenever `hasIngredient` is used

The Anatomy of a Restriction

- onProperty
 - defines the property on which the restriction should hold
- Restriction of values
 - owl:allValuesFrom – all values must be in this class
 - owl:someValuesFrom – at least one value must be in this class
- Restriction of cardinalities
 - owl:minCardinality – at least n values
 - owl:maxCardinality – at most n values
 - owl:cardinality – exactly n values
- Both cannot be combined

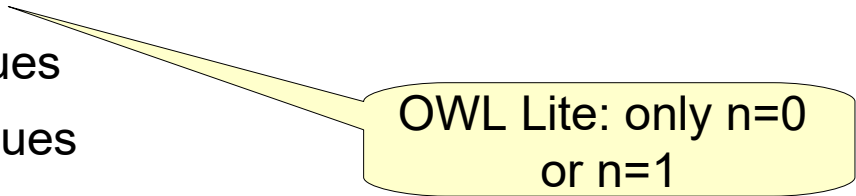

OWL Lite: only $n=0$
or $n=1$

Further Examples for Restrictions

- All ball sports require a ball

```
:BallSports rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :requires ;  
  owl:someValuesFrom :Ball .  
] .
```

- All sports for which a ball is required are ball sports

```
:BallSports owl:equivalentClass [  
  a owl:Restriction ;  
  owl:onProperty :requires ;  
  owl:someValuesFrom :Ball .  
] .
```

- Where is the difference?

Further Examples for Restrictions

- Given:

```
:BallSports owl:equivalentClass [  
  a owl:Restriction ;  
  owl:onProperty :requires ;  
  owl:someValuesFrom :Ball .  
] .  
  
:Soccer :requires :soccerBall .  
:soccerBall a :Ball.
```

- A reasoner may conclude that soccer is a ball sports
- This would not work with subclassOf
- Caveat: gymnastics with a ball are also recognized as ball sports...

Qualified Restrictions in OWL2

- In OWL, cardinalities and value restrictions may not be combined
- i.e., use either `all/someValuesFrom` or `min/maxCardinality`
- OWL 2 introduces *qualified restrictions*
- Example: a literate person has to have read at least 1,000 books (newspapers and magazines do not count!)

```
:LiteratePerson rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :hasRead;  
  owl:minQualifiedCardinality "1000"^^xsd:integer ;  
  owl:onClass :Book . ] .
```


Analogously, there are also
`owl:maxQualifiedCardinality` and
`owl:qualifiedCardinality`

Using Restriction Classes as Ranges

- Restrictions can also be used in other contexts
- Example: books, newspapers, and posters can be read
 - essentially: everything that contains letters

- Range of the predicate *reads*:

```
:reads rdfs:range [  
  a owl:Restriction ;  
  owl:onProperty :containsLetter ;  
  owl:minCardinality 1^^xsd:integer .  
]
```

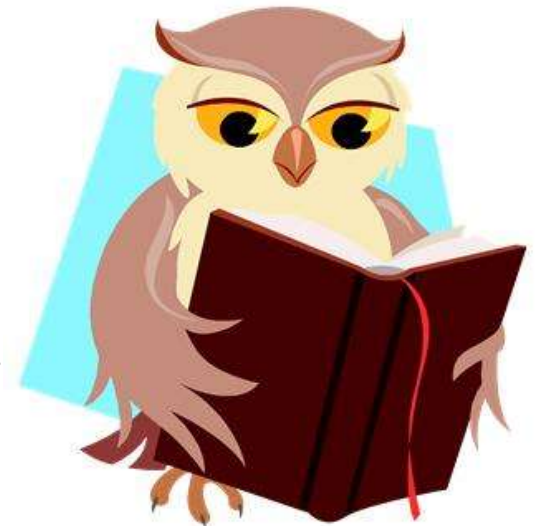


Using Restrictions as Domains

- If it works for ranges, it also works for domains
- e.g.: to think about something, a brain is required

- Domain of the *thinksAbout* property:

```
:thinksAbout rdfs:domain [  
  a owl:Restriction ;  
  owl:onProperty :hasBodyPart ;  
  owl:someValuesFrom :Brain .  
] .
```

- Note: only in OWL DL/Full

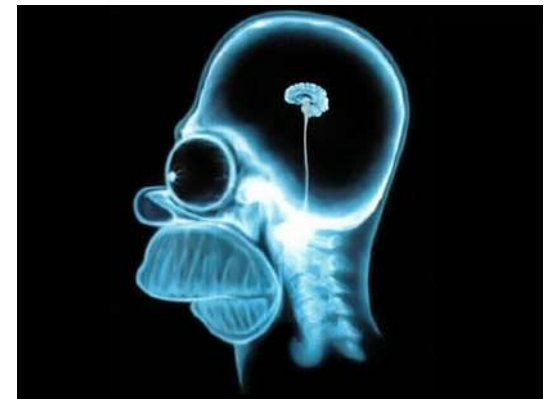


Nesting Restrictions

- It is always possible to make things more complex
- e.g.: grandparents have children who themselves have at least one child

```
:GrandParent owl:equivalentClass [  
  a owl:Restriction ;  
  owl:onProperty :hasChild ;  
  owl:someValuesFrom [  
    a owl:Restriction ;  
    owl:onProperty :hasChild ;  
    owl:minCardinality 1^^xsd:integer .  
  ] .  
]
```


Web Ontology Language (OWL)

- What we have seen up to now
 - the vocabulary of OWL Lite
 - useful in many cases
 - "A little semantics goes a long way."
- OWL DL and OWL Full are more powerful
 - but also harder to handle

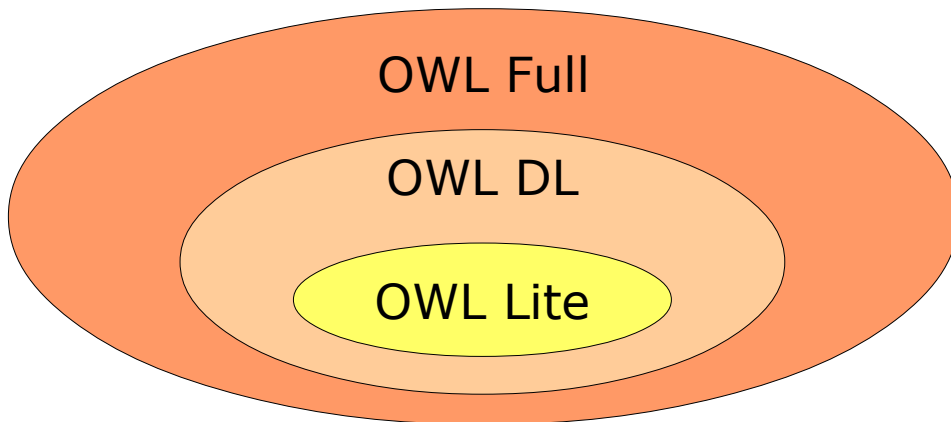

OWL DL

- DL stands for "Description Logics"
 - a subset of first order logics
 - we will get back to that next week
- OWL DL introduces
 - the full set of cardinality restrictions (OWL Lite allows only 0 and 1)
 - more set operators
 - closed classes
 - value based restrictions
 - restrictions on datatypes
 - ...

Complex Set Definitions

- Set union

```
:FacultyMembers owl:unionOf  
  (:Students, :Professors) .
```

- Complement set

```
:LivingThings owl:complementOf :InanimateThings .
```

- Disjoint sets

```
:EdibleMushrooms owl:disjointWith  
  :PoisonousMushrooms .
```

Previously on “Semantic Web Technologies”

- Let's look at that sentence:
 - "Madrid is the capital of Spain."
- We can get the following information:
 - "Madrid is the capital of Spain." ✓
 - "Spain is a state." ✓
 - "Madrid is a city." ✓
 - "Madrid is located in Spain." ✓
 - "Barcelona is not the capital of Spain." ✓
 - "Madrid is not the capital of France." ✓
 - "Madrid is not a state." ✗
 - ...



Previously on “Semantic Web Technologies”

- "Madrid is not a state." ✘
- Why not?
 - Madrid is a city
 - Nothing can be a city and a state at the same time.

- In OWL:

```
:Madrid a :City .  
:City owl:disjointWith :State .
```

```
ASK { :Madrid a :State . } → false
```

Complex Set Definitions

- We can combine class definitions and restrictions:


```
:VegetarianRecipe rdfs:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :hasIngredient ;  
  owl:allValuesFrom [  
    a owl:Class .  
    owl:complementOf [  
      owl:unionOf (:Meat :Fish)  
    ]  
  ]  
] .
```

A Tale from the Road

- ALIS: EU funded research project (2006-2009)
- Automated Legal Intelligent System
 - automatic search for relevant European laws
 - given a legal case at hand
 - using ontologies, reasoning, etc.
 - use case: copyright law

A Tale from the Road

- One important differentiation (among others):
 - Single Author Work
 - Multi Author Work

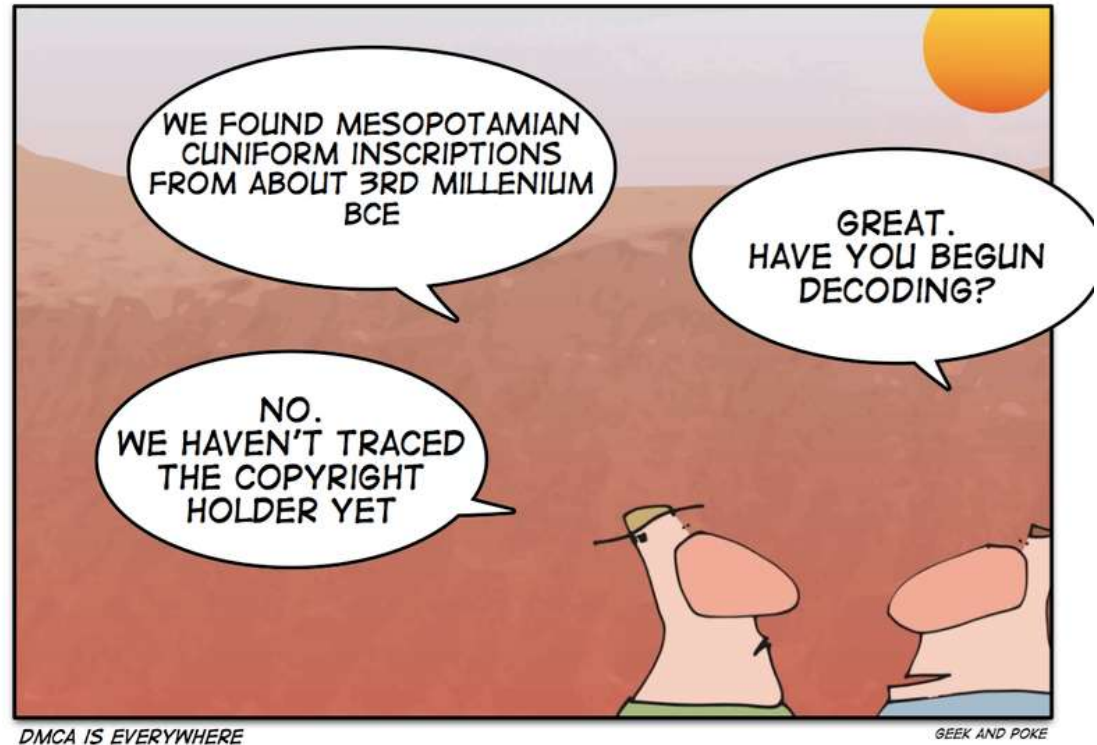

http://geekandpoke.typepad.com/geekandpoke/2006/10/copyright_and_a.html

A Tale from the Road

- Naive Solution in OWL DL:


```
:hasAuthor a owl:ObjectProperty;  
           rdfs:domain :Work ;  
           rdfs:range :Author .
```

```
:SingleAuthorWork rdfs:subClassOf  
  :Work,  
  [ a owl:Restriction;  
    owl:onProperty :hasAuthor ;  
    owl:cardinality 1^^xsd:integer ] .
```

```
:MultiAuthorWork rdfs:subClassOf  
  :Work,  
  [ a owl:Restriction;  
    owl:onProperty :hasAuthor ;  
    owl:minCardinality 2^^xsd:integer ] .
```

A Tale from the Road

- Result:
 - not such a good idea
 - why not?

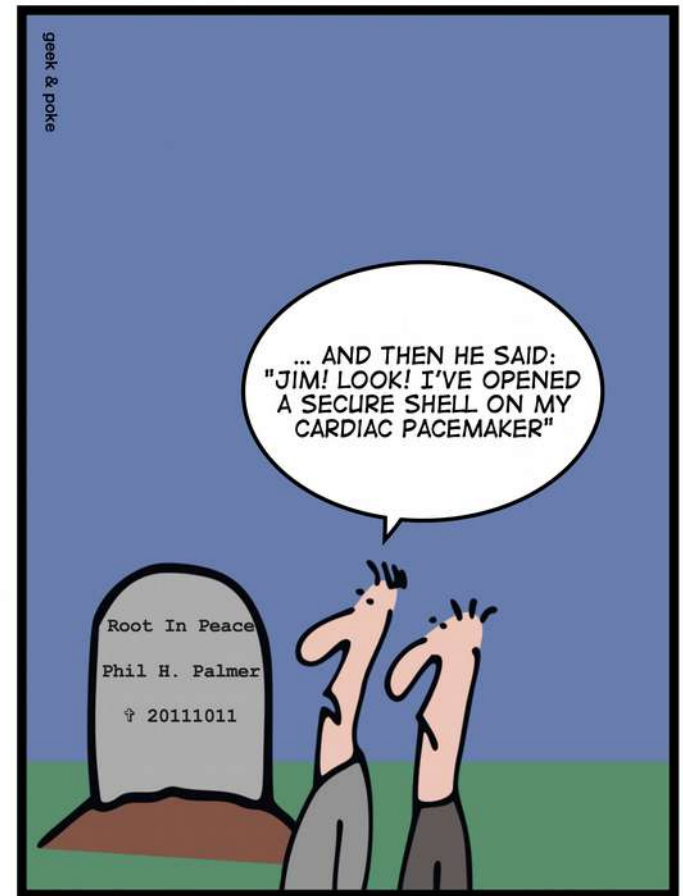

http://geekandpoke.typepad.com/geekandpoke/2006/10/copyright_and_a.html

A Tale from the Road

- Given

```
:DataMining :hasAuthor :IanWitten, :EibeFrank .
```

- what can we derive from that?

- OK, so we need

```
:DataMining :hasAuthor :IanWitten, :EibeFrank .  
:IanWitten owl:differentFrom :EibeFrank .
```

```
→ :DataMining a :MultiAuthorWork .
```

A Tale from the Road

- Given:

```
:Faust :hasAuthor :Goethe .
```

- what can we derive from that?

- Since it worked for Multi Author Work, how about

```
:Work owl:disjointUnionOf  
  (:SingleAuthorWork, :MultiAuthorWork) .
```

?

- Note: we can classify `:Faust` neither as Single nor as Multi Author Work

Recap: Principles of RDF

- Basic semantic principles of RDF:
 - AAA: Anybody can say Anything about Anything
- Non-unique name assumption
 - we can control it with owl:sameAs and owl:differentFrom
- Open World Assumption
 - so far, we have to live with it

Closed Classes

- The Open World Assumption says:
 - everything we do not know *could* be true
- Example:
 - `:Tim a :PeopleInOfficeD219 .`
 - `:John a :PeopleInOfficeD219 .`
 - `:Mary a :PeopleInOfficeD219 .`
- This does not mean that there cannot be more people in D219
 - `:Mike a :PeopleInD219 .`
- Sometimes, this is exactly what we want to say

Closed Classes

- Works with `owl:oneOf` in OWL DL

- Example:

```
:PeopleInOfficeD219 owl:oneOf (:Tim :John :Mary) .
```

- Now, what is the meaning of

```
:Mike a :PeopleInD219 .
```

?

Back to a Tale from the Road

- Solution:

```
:Faust a [ a owl:Restriction ;  
           owl:onProperty :hasAuthor ;  
           owl:allValuesFrom [  
             a owl:Class ;  
             owl:oneOf (:Goethe)  
           ]  
].
```


OWL DL: Restrictions with Single Values

- For ObjectProperties:

```
:AfricanStates owl:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :locatedOnContinent  
  owl:hasValue :Africa ] .
```

- For DatatypeProperties:

```
:AlbumsFromTheEarly80s owl:subClassOf [  
  a owl:Restriction ;  
  owl:onProperty :year  
  owl:dataRange  
    (1980^^xsd:integer  
     1981^^xsd:integer  
     1982^^xsd:integer) ] .
```

OWL Lite/DL vs. OWL Full

- OWL Lite/DL: a resource is *either* an instance *or* a class *or* a property

- OWL Full does not have such restrictions:

```
:Elephant a owl:Class .  
:Elephant a :Species .  
:Elephant :livesIn :Africa .  
:Species a owl:Class .
```

- OWL Lite/DL: classes are only instances of `owl:Class`
- OWL Lite/DL: classes and properties can only have a predefined set of relations (e.g., `rdfs:subClassOf`).

And Now for Something Completely Different

- Can we use OWL to solve a Sudoku?

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9

Sudoku Solving in OWL

- What is our domain about?
- First of all, a closed class of numbers

```
:Number a owl:Class ;  
    owl:oneOf (:1 :2 :3 :4 :5 :6 :7 :8 :9) .  
    :1 owl:differentFrom (:2 :3 :4 :5 :6 :7 :8 :9) .  
    :2 owl:differentFrom (:3 :4 :5 :6 :7 :8 :9) .  
    ...
```

- ...and a lot of fields
 - that we want to fill with numbers
 - simplification: numbers are fields as well
 - we want to know which field equals which number

Sudoku Solving in OWL

- 81 Fields:

c1_11 a :Number .

c1_21 a :Number .

...

c1_33 a :Number .

c2_11 a :Number .

...

c9_33 a :Number .

c1_11	c1_12		c2_11	c2_12				
c1_21								
c4_11								

Sudoku Solving in OWL

- Fields in a quadrant are different

```
c1_11 owl:differentFrom
  c1_12, c1_13, ..., c1_33 .
c1_12 owl:differentFrom
  c1_13, c1_21, ..., c1_33
...
c1_32 owl:differentFrom
  c1_33 .
c2_11 owl:differentFrom
  c2_12, c2_13, ..., c1_33
...
c9_32 owl:differentFrom
  c9_33 .
```

c1_11	c1_12		c2_11	c2_12				
c1_21								
c4_11								
.								

Sudoku Solving in OWL

- Fields in a row are different

```
c1_11 owl:differentFrom  
  c1_12, c1_13, ..., c3_13 .
```

...

c1_11	c1_12		c2_11	c2_12				
c1_21								
c4_11								

Sudoku Solving in OWL

- Fields in a column are different

```
c1_11 owl:differentFrom  
  c1_21, c1_31, ..., c3_31 .
```

...

c1_11	c1_12		c2_11	c2_12				
c1_21								
c4_11								

Sudoku Solving in OWL

- Last step: enter known numbers

```
c1_11 owl:sameAs :5 .
```

```
c1_12 owl:sameAs :3 .
```

```
c1_21 owl:sameAs :6 .
```

```
...
```

5	3			7				
6			1	9	5			
	9	8					6	
8				6				3
4			8		3			1
7				2				6
	6					2	8	
			4	1	9			5
				8			7	9

Running this Example in Protégé

- We use a reasoner to infer implicit facts
- Here: number c_11 (top left)

	4		
		3	
		2	
1			

Description: c1_11

Types +

- Number

Same Individual As +

- c2_21, c4_22, 3

Different Individuals +

- c1_21, c3_11, c3_21
- c1_12, c1_21, c1_22
- c1_12, c2_11, c2_12

Inferred: this is a 3

Defined conditions
(horizontal, vertical,
square)

Summary

- OWL allows defining more complex ontologies
- Flavors: OWL Lite, DL, Full
- Definitions of sets, restrictions, property characteristics
- In our example, we can now use the full set of conclusions:
 - "Barcelona is not the capital of Spain." ✓
 - "Madrid is not the capital of France." ✓
 - "Madrid is not a state." ✓

Coming Up Next

- Changes in OWL 2
- How does reasoning with OWL *actually* work?



Questions?

