


# Web Data Integration

# Data Quality Assessment and Data Fusion



# The Data Integration Process

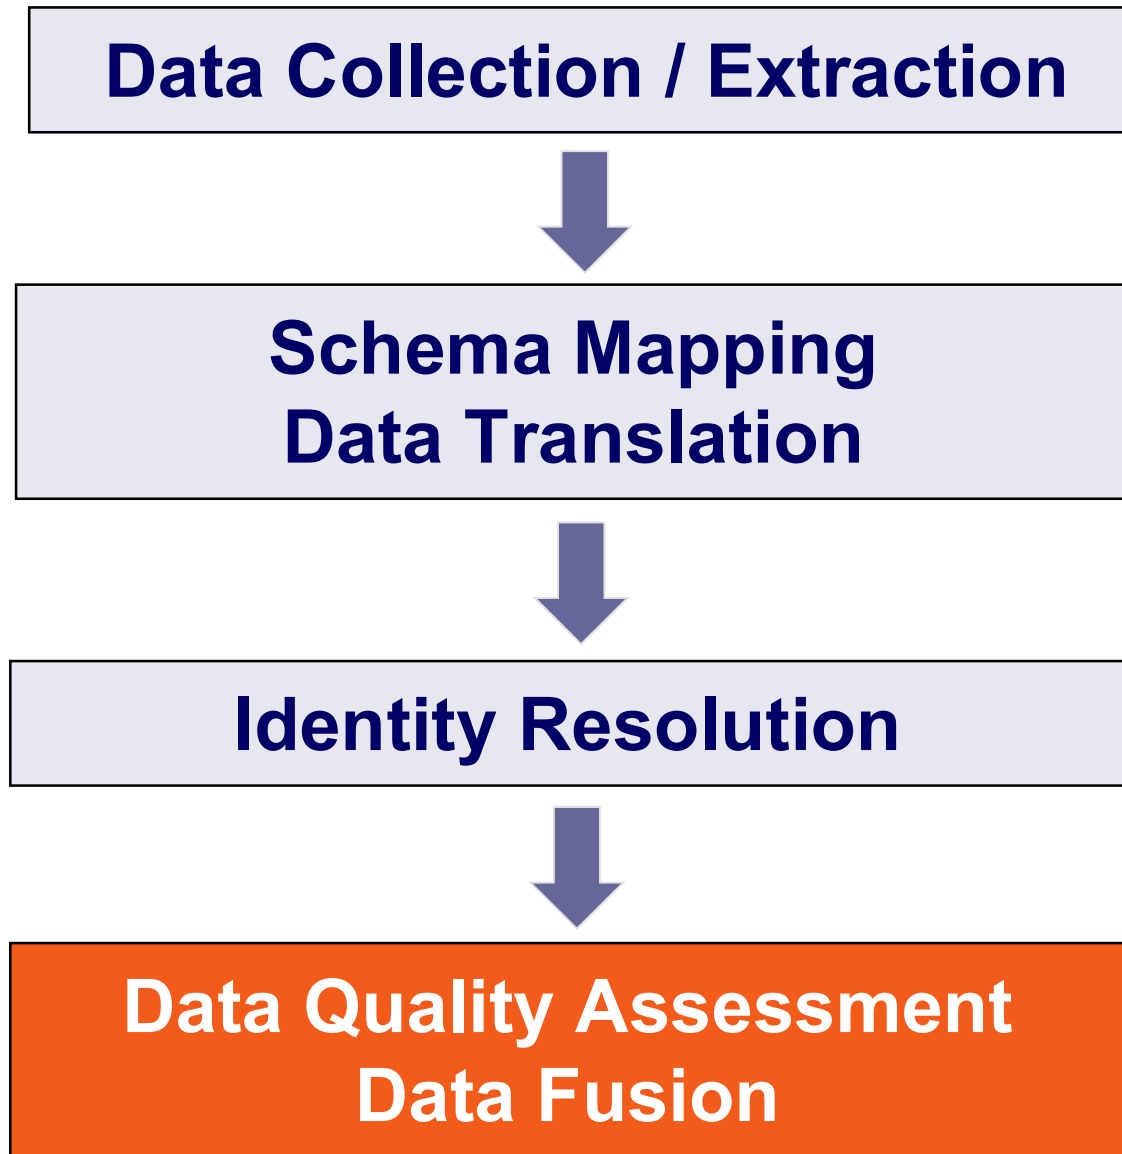

# Final Exam HWS2023 (IE670, 3 ECTS)

## – Date and Time

- Monday, 18.12.2023, time and room will be announced

## – Format

- 6 open questions that show that you have understood the content of the lecture (5 points per question), 60 minutes time
- All lecture slide sets are relevant, including
  - pro and cons of web data publication mechanisms
  - XML syntax and DTDs
  - XPath or SPARQL query (one question)
  - pro and cons of schema matching methods + data samples
  - blocking, matching rules, learning entity matching rules,
  - strength and weaknesses of different similarity measures
  - data fusion, conflict resolution methods, evaluation measures, profiling
- We want precise answers, not all you know about the topic
- Three example questions and answers are provided on the course webpage

1. Introduction
2. Data Profiling
3. Data Provenance
4. Data Quality Assessment
5. Data Fusion
  1. Slot Filling and Conflict Resolution
  2. Conflict Resolution Functions
  3. Evaluation of Fusion Results
  4. Case Studies



# 1. Introduction

Information providers on the Web have

- different levels of knowledge
- different views of the world
- different intentions


Therefore,

1. information on the Web is partly wrong, biased, outdated, incomplete, and inconsistent.
2. every piece of information on the Web needs to be considered as **a claim by somebody** at some point in time and not as a fact.
3. the **information consumer** needs to make up her mind which claims to use for a certain task.



# Definition: Data Conflict

Multiple records that describe the same real-world entity provide **different values for the same attribute**.

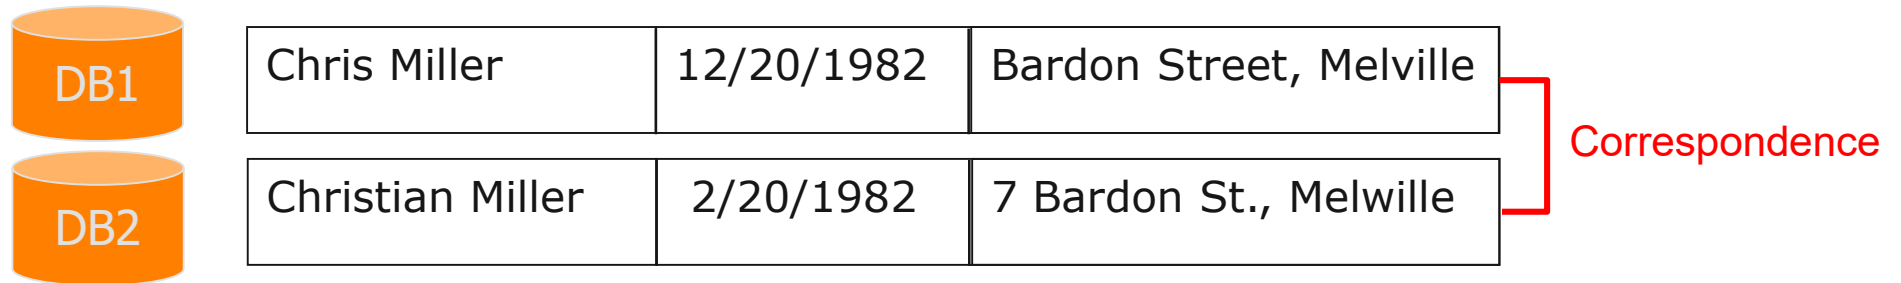

|     |                  |            |                         |
|-----|------------------|------------|-------------------------|
| DB1 | Chris Miller     | 12/20/1982 | Bardon Street, Melville |
| DB2 | Christian Miller | 2/20/1982  | 7 Bardon St., Melville  |


Correspondence

Reasons for data conflicts:

1. **Data creation:** Typos, measurement errors, erroneous information extraction
2. **Data currency:** Different points in time, missing updates
3. **Data semantics:** Different definitions of concepts (like population or GDP)
4. **Data representation:** Different coding of values (“Mrs.” vs. “2”)
5. **Data integration:** Wrong data translation or identity resolution
6. **Actual disagreement** of data providers: Subjective attributes

# Definition: Data Fusion

Given multiple records that describe the same real-world entity, create a single record by resolving data conflicts.

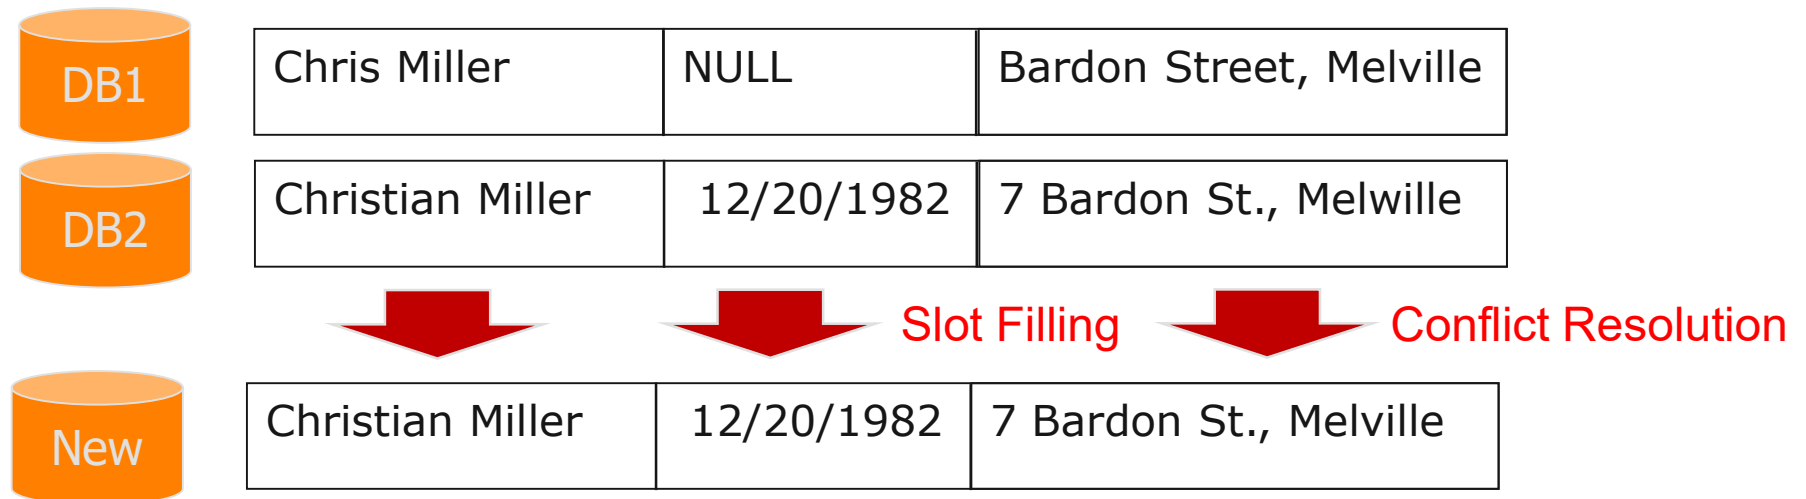

- **Goal:** Create a high-quality record.
- But what does high data quality mean?

**Data quality is a multi-dimensional construct which measures the **fitness for use** of data for a **specific task**.**

Fitness for use

1. has **many dimensions**

- accuracy, timeliness, completeness, understandability, ...

2. is **task-dependent**

- higher quality requirements when you invest one million €

3. is **subjective**

- some people are more paranoid than others



# Data Quality Assessment

## – Content-based Metrics

- use information to be assessed itself as quality indicator
- examples: voting, constraints and consistency rules, statistical outlier detection


## – Provenance-based Metrics

- employ provenance meta-information about the circumstances in which information was created as quality indicator
- examples: “Disbelieve everything a vendor says about its competitor” or “Do not use information that is older than one week”

## – Rating-based Metrics

- rely on explicit or implicit ratings about information itself, information sources, or information providers
- examples: “Only read news articles having at least 100 Facebook likes”, “Accept recommendations from a friend on restaurants, but distrust him on computers”, “Prefer content from websites having a high PageRank”

# Summary: Elements of the Data Fusion Process

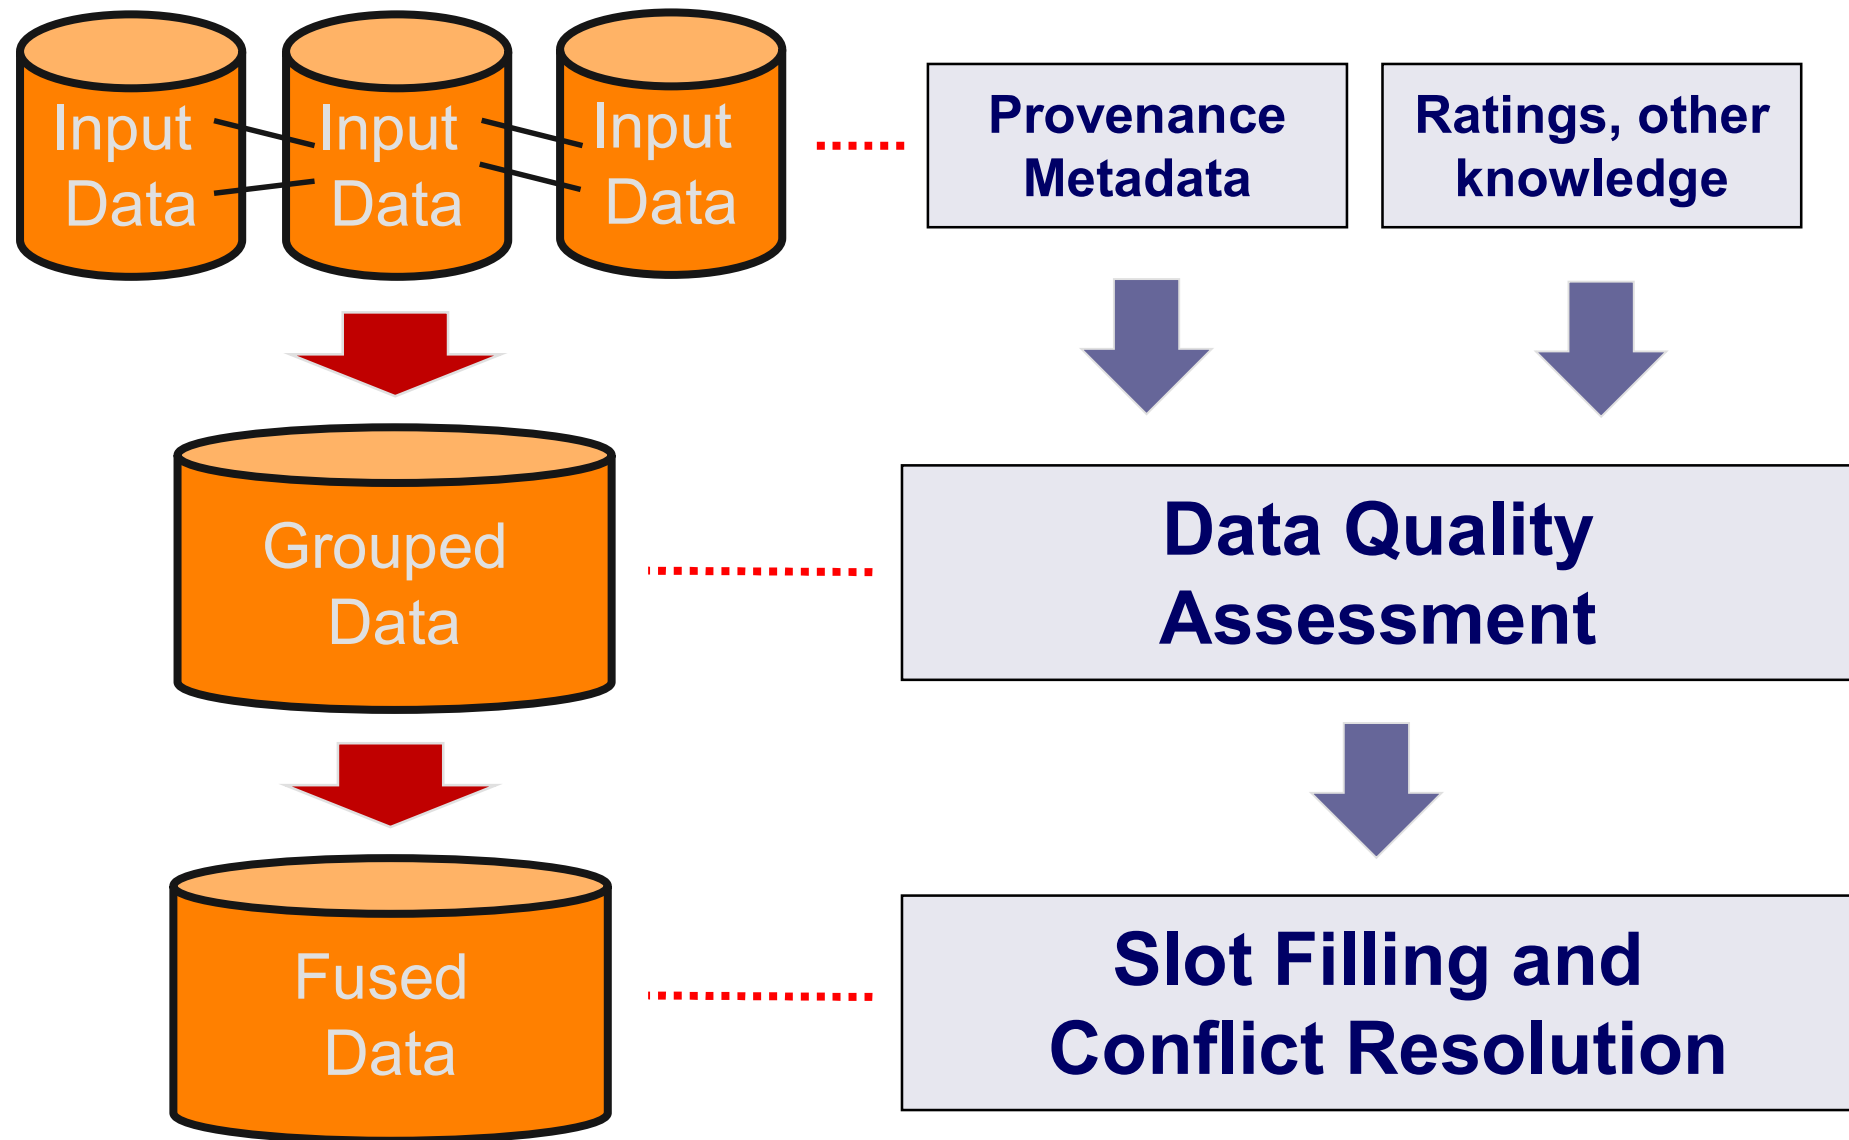


1. Introduction
2. Data Profiling
3. Data Provenance
4. Data Quality Assessment
5. Data Fusion
  1. Slot Filling and Conflict Resolution
  2. Conflict Resolution Functions
  3. Evaluation of Fusion Results
  4. Case Studies

## 2. Data Profiling

**Data profiling refers to the activity of calculating statistics and creating summaries of a data source or data lake.**

- profiling lays the foundation for recognizing data quality problems
- manual exploration (data gazing) should be supported with profiling results

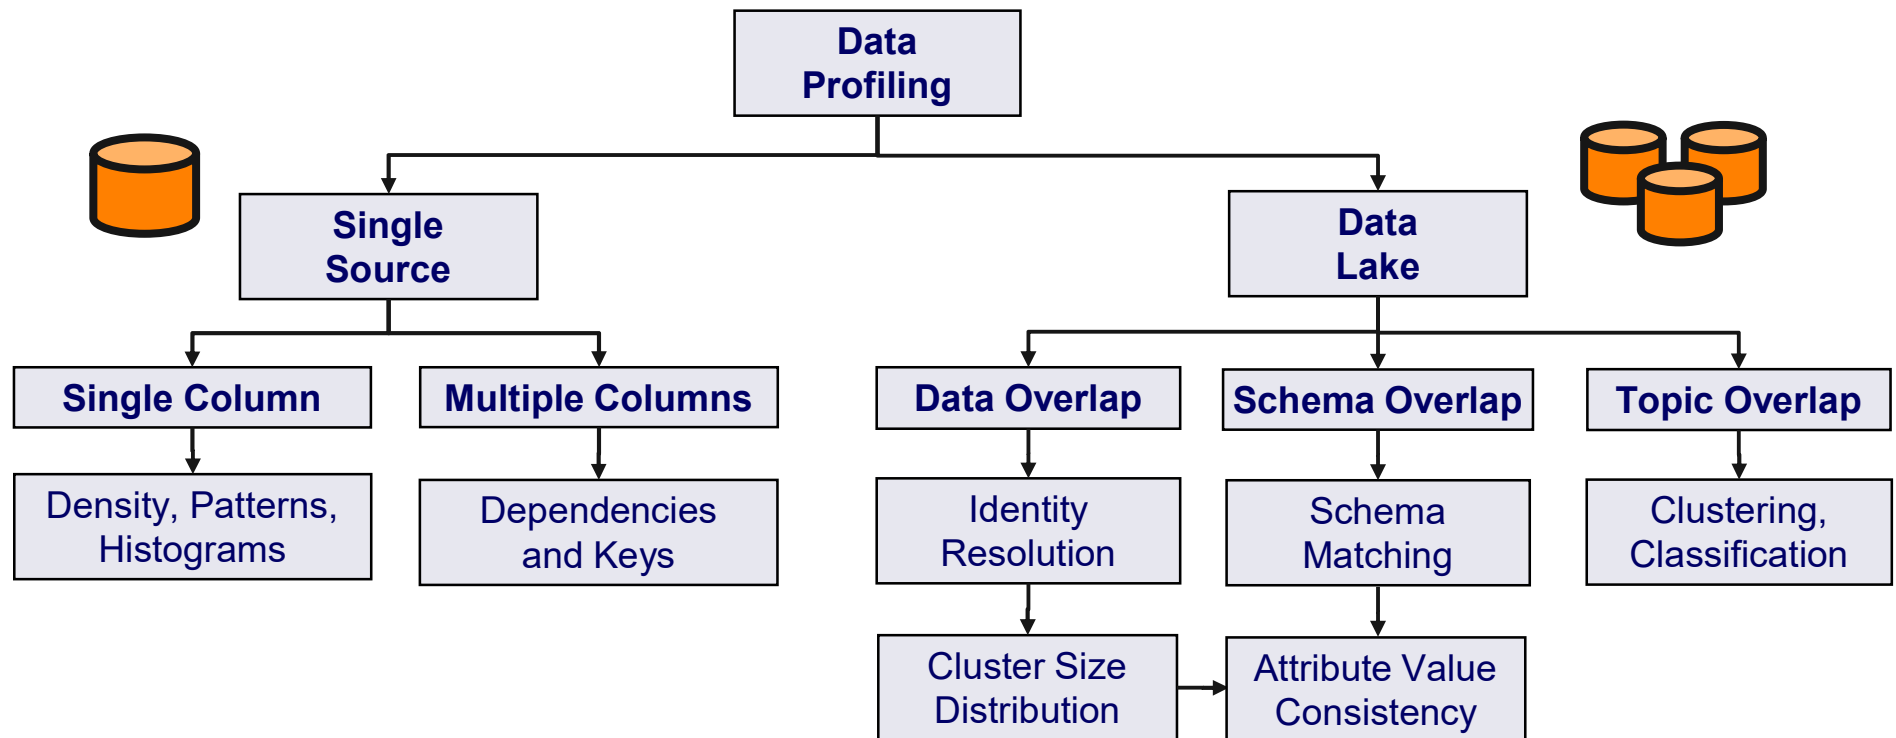

Abedjan, et al.: Data Profiling. Morgan & Cleypool Synthesis Lecture in Computer Science, 2018.

## 2.1 Single Column Profiling: Metrics

| Category                          | Task        | Task Description                                                                           |
|-----------------------------------|-------------|--------------------------------------------------------------------------------------------|
| Cardinalities                     | num-rows    | Number of rows                                                                             |
|                                   | null values | Number or percentage of null values                                                        |
|                                   | distinct    | Number of distinct values                                                                  |
|                                   | uniqueness  | Number of distinct values divided by number of rows                                        |
| Value Distributions               | histogram   | Frequency histograms (equi-width, equi-depth, etc.)                                        |
|                                   | extremes    | Minimum and maximum values in a numeric column                                             |
|                                   | constancy   | Frequency of most frequent value divided by number of rows                                 |
|                                   | quartiles   | Three points that divide (numeric) values into four equal groups                           |
|                                   | first digit | Distribution of first digit in numeric values; to check Benford's law                      |
| Data Types, Patterns, and Domains | basic type  | Numeric, alphanumeric, date, time, etc.                                                    |
|                                   | data type   | DBMS-specific data type (varchar, timestamp, etc.)                                         |
|                                   | lengths     | Minimum, maximum, median, and average lengths of values within a column                    |
|                                   | size        | Maximum number of digits in numeric values                                                 |
|                                   | decimals    | Maximum number of decimals in numeric values                                               |
|                                   | patterns    | Histogram of value patterns (Aa9...)                                                       |
|                                   | data class  | Generic semantic data type, such as code, indicator, text, date/time, quantity, identifier |
|                                   | domain      | Semantic domain, such as credit card, first name, city, phenotype                          |

Central for judging the usefulness of attributes

A histogram says more than thousand averages


- outliers
- skewed distributions

Data types and lengths should always be reported

Good summarization of an attribute

# Single Column Profiling: Examples

## Google Cloud Dataprep by Trifacta

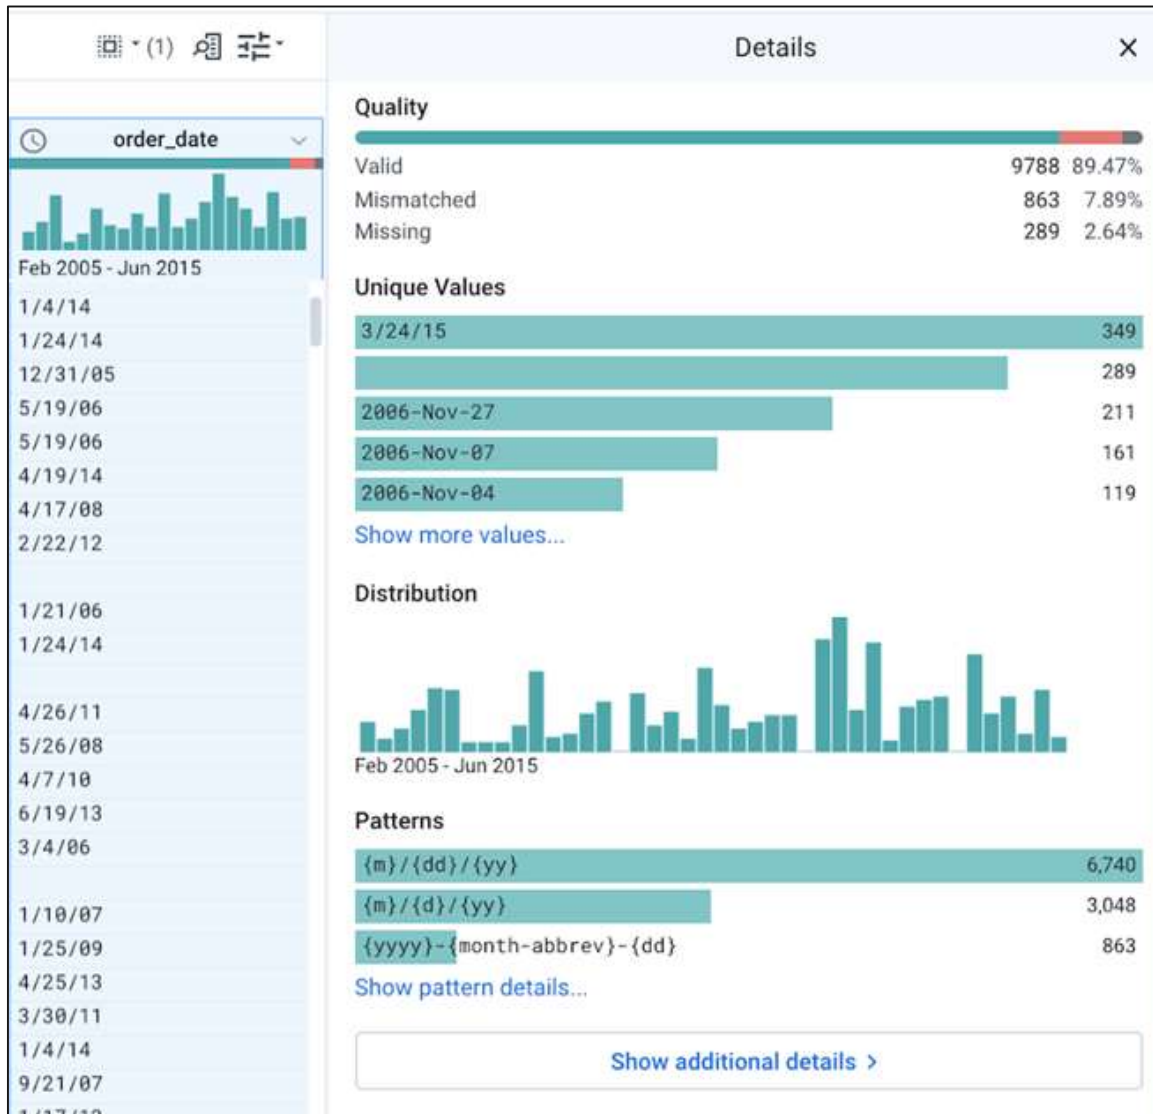

Data type mismatch

Most frequent values

Most frequent value patterns



# Profiling in Python

<https://github.com/pandas-profiling/pandas-profiling>

```
1 import pandas as pd
2 import pandas_profiling
3
4 csv_file = "../datasets/anime/anime_planet.csv"
5
6 data_frame = pd.read_csv(csv_file)
7 pandas_profiling.ProfileReport(data_frame)
```

Correlations and  
missing values

Data type  
detection

The screenshot displays the pandas-profiling web interface. At the top, there are tabs for 'Overview', 'Variables', 'Correlations', 'Missing values', and 'Sample'. The 'Overview' tab is active. Below the tabs, the 'Dataset info' section shows a table with 8 variables, 4000 observations, 278 missing cells (0.9%), 0 duplicate rows, and a total size of 1.8 MiB. The 'Variables types' section shows a table with 6 categorical (CAT) and 2 numerical (NUM) variables. The 'Warnings' section lists several warnings, including high cardinality for 'Episodes', 'Genres', 'subject\_id', and 'Title', and missing values for 'Producers'. Red arrows point from the text 'Correlations and missing values' to the 'Correlations' and 'Missing values' tabs, and from 'Data type detection' to the 'Variables types' table.

| Dataset info                  |            |
|-------------------------------|------------|
| Number of variables           | 8          |
| Number of observations        | 4000       |
| Missing cells                 | 278 (0.9%) |
| Duplicate rows                | 0 (0.0%)   |
| Total size in memory          | 1.8 MiB    |
| Average record size in memory | 467.5 B    |


| Variables types |   |
|-----------------|---|
| CAT             | 6 |
| NUM             | 2 |

| Warnings                                                |         |
|---------------------------------------------------------|---------|
| Episodes has a high cardinality: 128 distinct values    | Warning |
| Genres has a high cardinality: 1828 distinct values     | Warning |
| Producers has 272 (6.8%) missing values                 | Missing |
| Producers has a high cardinality: 176 distinct values   | Warning |
| subject_id has a high cardinality: 4000 distinct values | Warning |
| Title has a high cardinality: 3983 distinct values      | Warning |

## 2.2 Data Lake Profiling: Topic Overlap


### – Approaches:

1. Train **supervised classifier** to categorize data sources / tables into predefined categories using textual metadata, schema-level labels, or textual content
2. **Cluster sources** / tables based on textual metadata and/or textual content

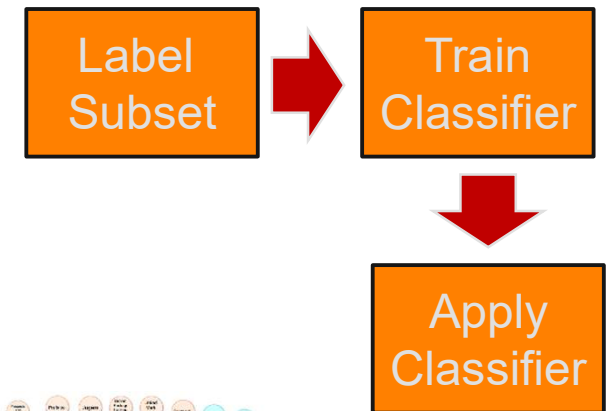

### – Example:

- 100 LOD data sources manually assigned to 9 categories
- 1000 records sampled per data source
- 900 additional data sources classified with F1 of 0.81

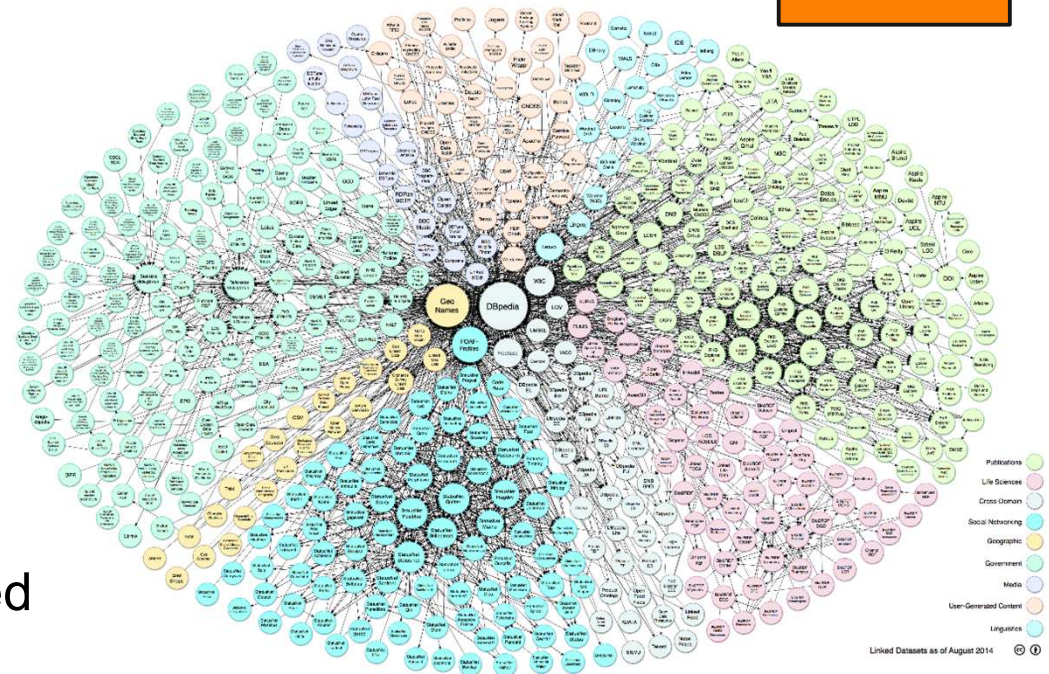

Böhm, Kasneci, Naumann: Latent topics in graph-structured data. CIKM 2012.

Meusel, Spahiu, Bizer, Paulheim: Towards automatic topical classification of LOD datasets. LDOW 2015.

# Data Lake Profiling: Data and Schema Overlap

- Approach: **Match data to central database**
- Example: Profiling a corpus of 33.3 million HTML tables by matching them to the DBpedia knowledge base



- Results
  - 301,000 tables (1%) have matching rows and matching columns
  - 8,000,000 million values for fusion
- Interpretation
  - topical bias of KB needs to be considered
  - product tables missed

| DBpedia Class             | Number of Tables/Values |                |                | V <sub>c</sub> Data Type |           |         |           |
|---------------------------|-------------------------|----------------|----------------|--------------------------|-----------|---------|-----------|
|                           | T <sub>0</sub>          | T <sub>c</sub> | V <sub>c</sub> | Numeric                  | Date      | String  | Reference |
| + Person                  | 265 685                 | 103 801        | 4 176 370      | 2 117 793                | 1 588 475 | 266 628 | 203 474   |
| - Athlete                 | 243 322                 | 95 916         | 3 861 641      | 2 084 017                | 1 435 775 | 163 771 | 178 078   |
| - Artist                  | 9 981                   | 2 356          | 18 886         | 3                        | 11 527    | 3 499   | 3 857     |
| - Politician              | 3 701                   | 1 388          | 18 505         | 10                       | 7 725     | 3 393   | 7 377     |
| - Office Holder           | 2 178                   | 1 435          | 131 633        | 30                       | 66 762    | 59 332  | 5 509     |
| + Organisation            | 194 317                 | 36 402         | 573 633        | 99 714                   | 187 370   | 100 710 | 185 839   |
| - Company                 | 97 891                  | 6 943          | 203 899        | 58 621                   | 83 001    | 34 665  | 27 612    |
| - SportsTeam              | 50 043                  | 2 722          | 31 866         | 2 206                    | 22 368    | 43      | 7 249     |
| - Educational Institution | 25 737                  | 14 415         | 238 365        | 38 056                   | 64 578    | 13 334  | 122 397   |
| - Broadcaster             | 14 515                  | 11 315         | 93 042         | 564                      | 13 095    | 52 186  | 27 197    |
| Work                      | 269 570                 | 127 677        | 2 284 916      | 109 265                  | 1 354 923 | 33 091  | 787 637   |
| + MusicalWork             | 138 676                 | 80 880         | 1 131 167      | 64 545                   | 396 940   | 7 610   | 662 072   |
| + Film                    | 43 163                  | 9 725          | 256 425        | 10 844                   | 198 913   | 14 382  | 32 286    |
| + Software                | 39 382                  | 23 829         | 486 868        | 418                      | 414 092   | 9 194   | 63 164    |
| Place                     | 133 141                 | 24 341         | 859 995        | 413 375                  | 273 510   | 84 111  | 88 999    |
| + PopulatedPlace          | 119 361                 | 21 486         | 787 854        | 405 406                  | 257 780   | 57 064  | 67 604    |
| - Country                 | 36 009                  | 6 556          | 208 886        | 93 107                   | 66 492    | 31 793  | 17 494    |
| - Settlement              | 17 388                  | 2 672          | 17 585         | 4 492                    | 6 662     | 2 444   | 3 987     |
| Species                   | 14 247                  | 4 893          | 83 359         | -                        | 7 902     | 38 682  | 36 775    |
| Σ                         | 949 970                 | 301 450        | 8 037 562      | 2 751 105                | 3 437 420 | 536 526 | 1 312 511 |

Hassanzadeh, et al.: Understanding a Large Corpus of Web Tables through Matching with Knowledge Bases. OM. 2015.  
 Ritze, et al. Profiling the Potential of Web Tables for Augmenting Cross-domain Knowledge Bases. WWW 2016.

# 3. Data Provenance

**Provenance is information about entities, activities, and people involved in producing a piece of data or thing, which can be used to form assessments about its quality, reliability or trustworthiness.**

Source: W3C PROV Specification

Provenance information = **important data quality indicator**

## Outline of this Subsection


1. Simple Attribution versus Full Provenance Chains
2. Publishing Provenance Information on the Web
3. Representing Provenance Metadata together with Integrated Data



# 3.1 Simple Attribution versus Full Provenance Chains


## 1. Simple Attribution:

- state **who** created a document/data item and **when** it was created
- standard: Dublin Core vocabulary

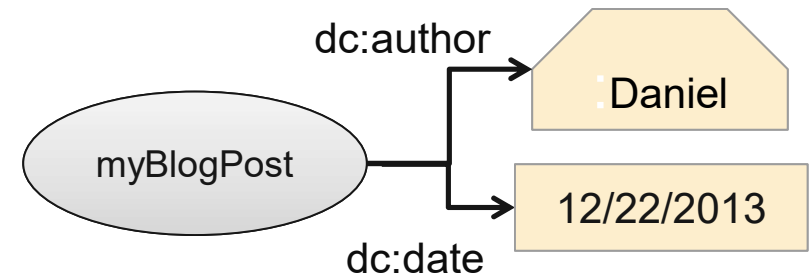

## 2. Full Provenance Chains

- Describe the **full process** of data creation / reuse / integration / aggregation
- standard: W3C PROV Specification
- alternative name: Data Lineage (explain why something is in a query result)

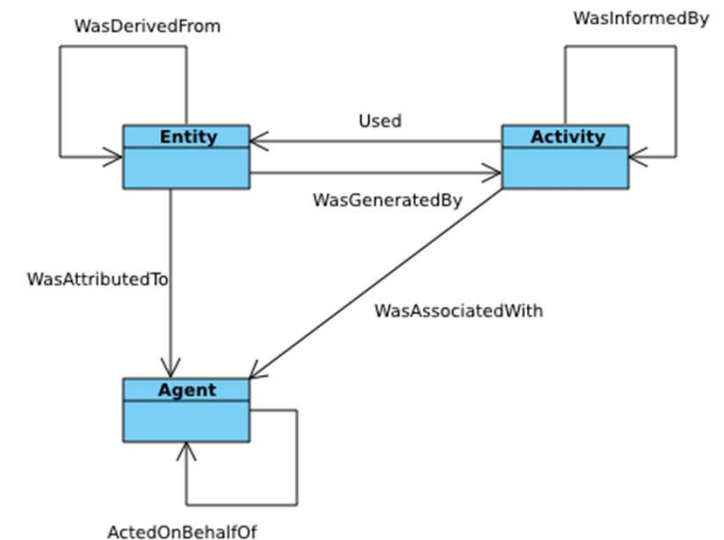

### – Factors for the decision between both alternatives:

- Will the users be interested in all the details?
  - Yes for science, investing, law suits. No for minor purchases in e-commerce
- Can target applications understand/reason about all details?

## 3.2 Publishing Provenance Information on the Web

In the context of the Web, you always know the **URL** from which you downloaded things. Some sites also give you **Last-Modified** information.

### HTTP-Response

```
HTTP/1.1 200 OK
Date: Mon, 18 Jan 2019 20:54:26 GMT
Server: Apache/1.3.6 (UNIX)
Last-Modified: Mon, 06 Dec 2018 14:06:11 GMT
Content-length: 6345
Content-Type: text/html

<html>
  <head><title>CB CD-Shop</title></head>
  <body><h1>Willkommen beim CB CD-Shop</h1> ....
```

Which vocabularies/schemata should websites use to publish **more detailed** provenance information?

# Dublin Core

- The Dublin Core vocabulary defines terms for representing **simple attribution** information
  - creator, contributor, publisher, date, rights, format, language, ...
- The terms are used in different technical contexts
  - HTML, Linked Data, proprietary library formats
  - Example of a Linked Data document:



`http://dbpedia.org/data/Alec_Empire`

```
# Metadata and Licensing Information
```

```
<http://dbpedia.org/data/Alec_Empire>
```

```
  rdfs:label "RDF document describing Alec Empire" ;
```

```
  rdf:type foaf:Document ;
```

```
  dc:publisher <http://dbpedia.org/resource/DBpedia> ;
```

```
  dc:date "2019-07-13"^^xsd:date ;
```

```
  dc:rights <http://en.wikipedia.org/wiki/WP:GFDL> .
```

```
# The Document Content
```

```
<http://dbpedia.org/resource/Alec_Empire>
```

```
  foaf:name "Empire, Alec" ;
```

```
  rdf:type foaf:Person ;
```

```
  rdfs:comment "Alec Empire (born May 2, 1972) is a German musician..."@en ;
```


```
...
```




- The W3C PROV vocabulary defines terms for representing **complex provenance chains**
- Example of a PROV XML document:




```
<prov:document>
  <!-- Entities -->
  <prov:entity prov:id="exn:article">
    <dct:title>Crime rises in cities</dct:title>
  </prov:entity>
  <!-- Agents -->
  <prov:agent prov:id="exc:derek">
    <prov:type>prov:Person</prov:type>
    <foaf:givenName>Derek Smith</foaf:givenName>
    <foaf:mbox>mailto:derek@example.org</foaf:mbox>
  </prov:agent>
  <!-- Activities -->
  <prov:activity prov:id="exc:compile1"/>
  <!-- Usage and Generation -->
  <prov:wasGeneratedBy>
    <prov:entity prov:ref="exn:article"/>
    <prov:activity prov:ref="exc:compile1"/>
  </prov:wasGeneratedBy>
  <!--Agent's Responsibility -->
  <prov:wasAssociatedWith>
    <prov:activity prov:ref="exc:compile1"/>
    <prov:agent prov:ref="exc:derek"/>
  </prov:wasAssociatedWith>
  ...
```

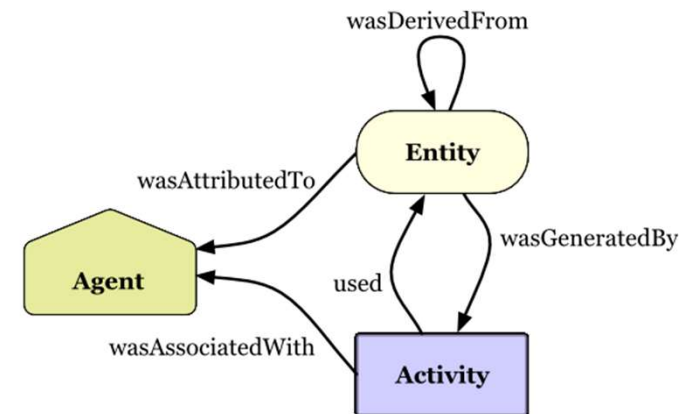

# More Complex Example: W3C PROV

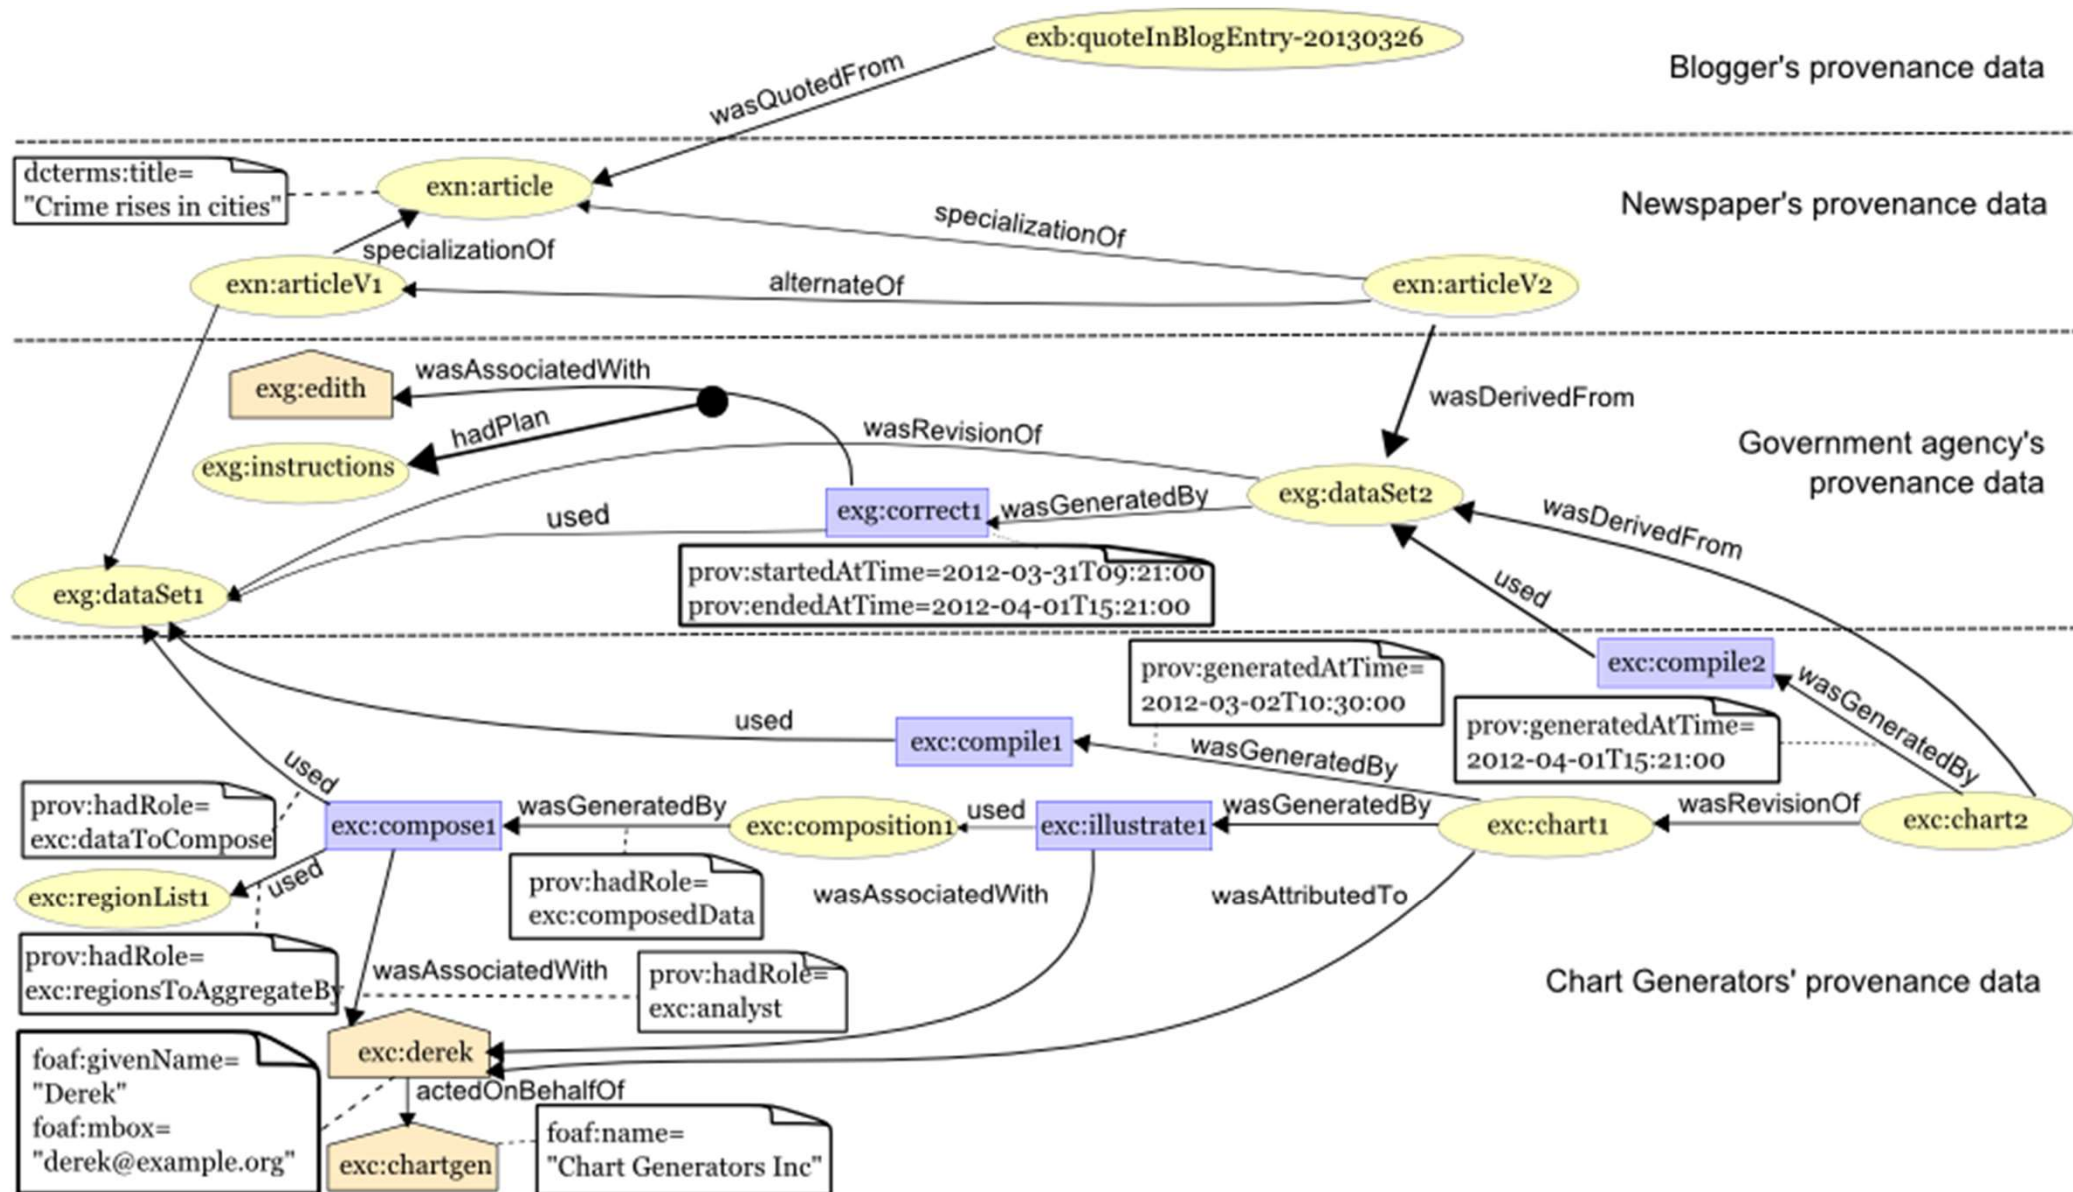

### 3.3 Representing Provenance Metadata together with Integrated Data

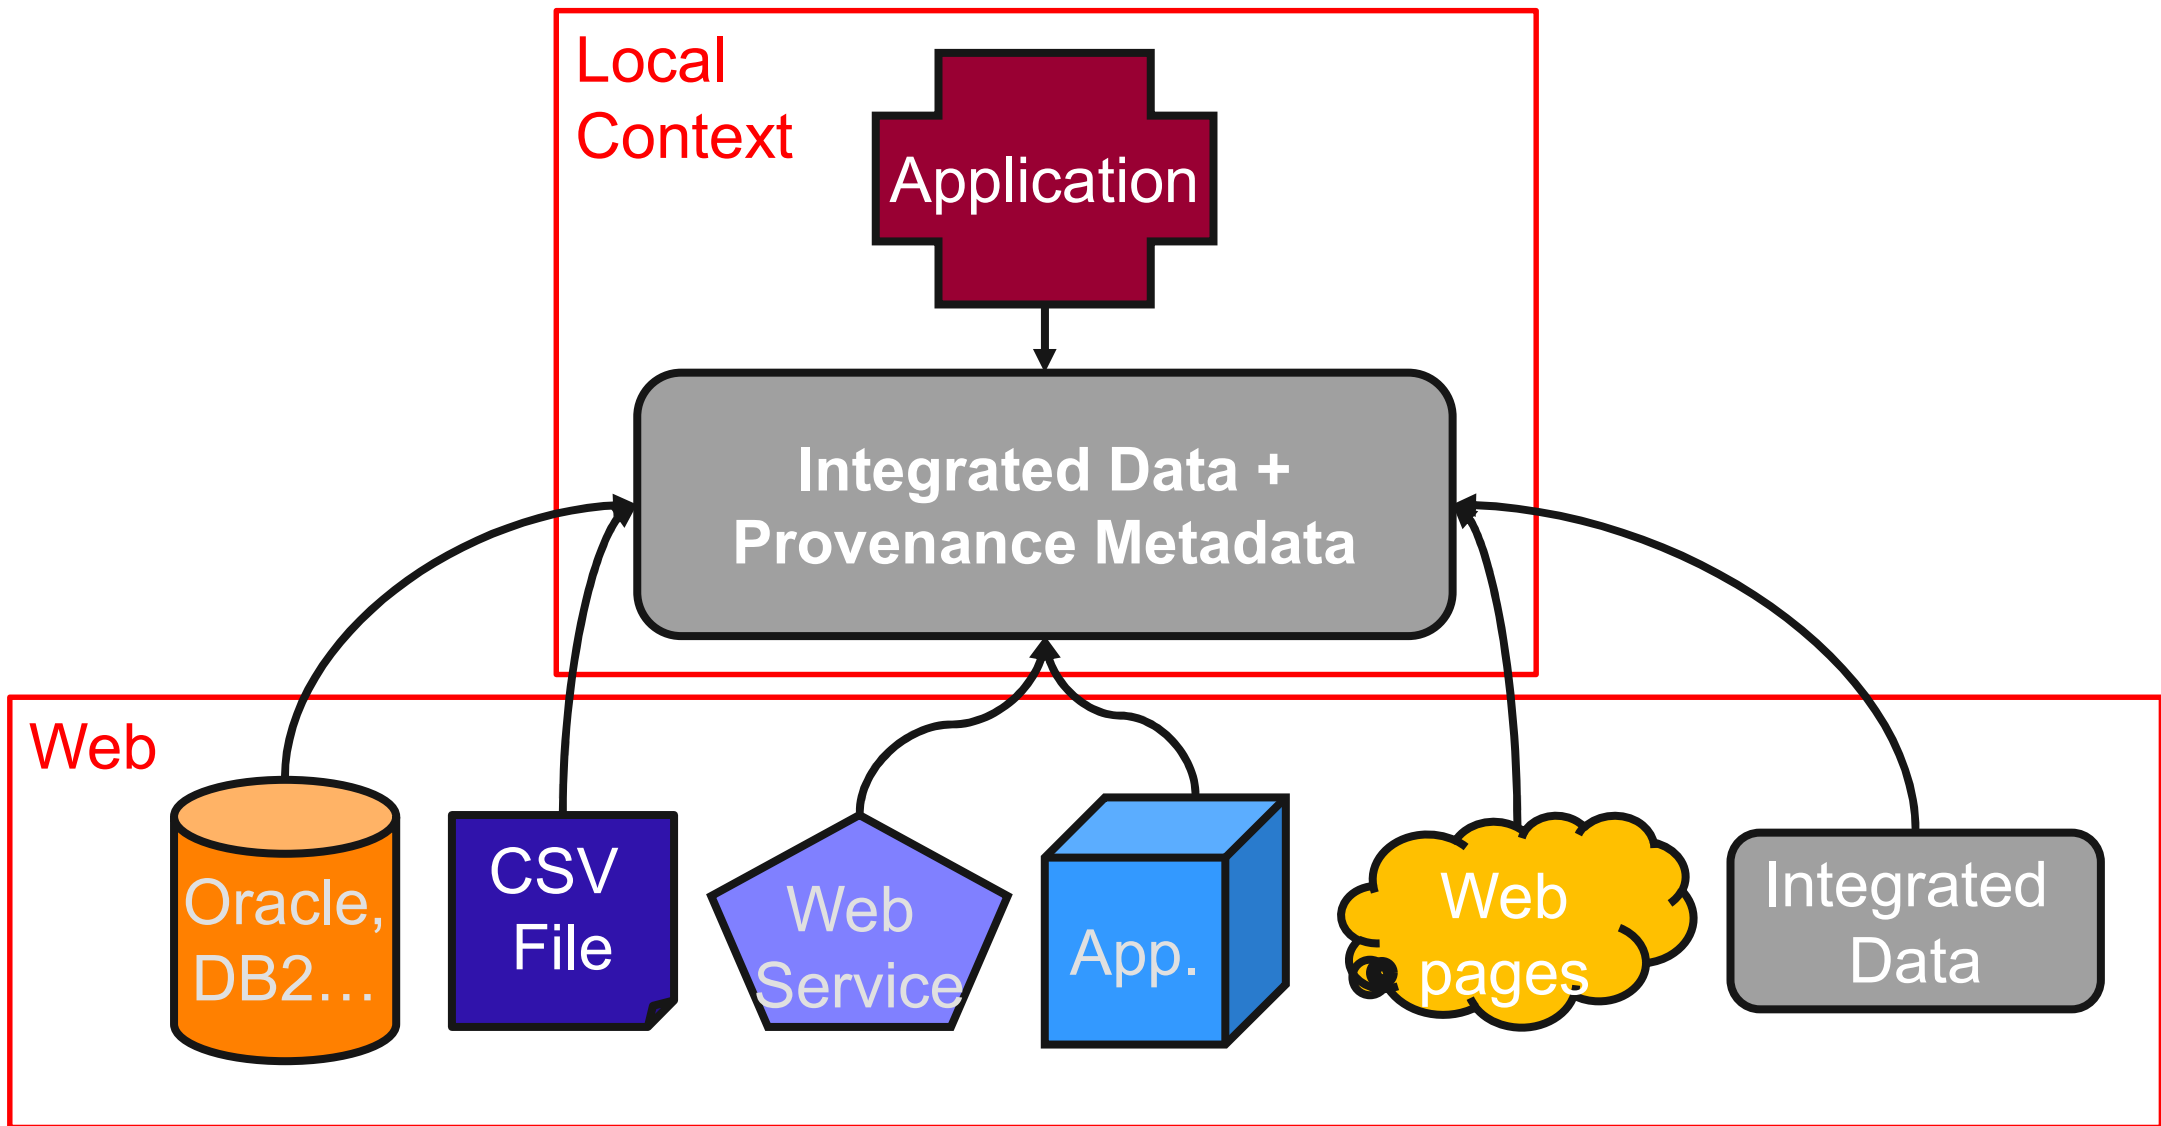

# Relational Data Model

- Alternative 1: Record-Level Provenance (coarse grained, fast queries)
- Alternative 2: Value-Level Provenance (fine grained, but slow queries)
- Alternative 3: Employ special database engine which implements extended relational data model with a pointer to provenance information for each attribute value (e.g. Stanford Trio Database)

Physicians with **Record-Level Provenance**

| <u>Key</u> | Name           | Street         | <b>ProvID</b> |
|------------|----------------|----------------|---------------|
| 1425       | Dr. Mark Smith | 14 Main Street | 001           |
| 1425       | Mark Smith     | 12 Main St.    | 002           |
| ...        | ...            | ...            | ...           |

Physicians with **Value-Level Provenance**

| <u>Key</u> | <u>Attribute</u> | Value          | <b>ProvID</b> |
|------------|------------------|----------------|---------------|
| 1425       | Name             | Dr. Mark Smith | 001           |
| 1425       | Name             | Mark Smith     | 002           |
| 1425       | Street           | 14 Main Street | 001           |
| ...        | ...              | ...            | ...           |

**Provenance Table**

| <b>ProvID</b> | Source             | Date                  |
|---------------|--------------------|-----------------------|
| 001           | www.mark-smith.com | 12/6/2023<br>18:42:12 |
| 002           | www.doc-find.com   | 12/1/2023<br>12:21:54 |
| ...           | ...                | ...                   |


# XML Data Model

Represent provenance using multiple **value elements** and references to **provenance elements**.

```
<physician>
  <name>
    <value prov="prov01">Dr. Mark Smith</value>
    <value prov="prov02">Mark Smith</value>
  </name>
  <address>
    <street>
      <value prov="prov01">14 Main Street</value>
      <value prov="prov02">12 Main St.</value>
    </street>
    <city> ... </city>
  </address>
</physician>
<provenance id="prov01">
  <source>http://www.marksmith.com/index.htm</source>
  <date>06 Nov 2023 14:06:11 GMT</date>
</provenance>
<provenance id="prov02">
  ...
```

# RDF Data Model

- Group triples into **Named Graphs** (= set of triples that is identified by a URI)
- Provide provenance information by talking about a graph in another graph
- Named Graphs can be queried using the SPARQL keyword GRAPH

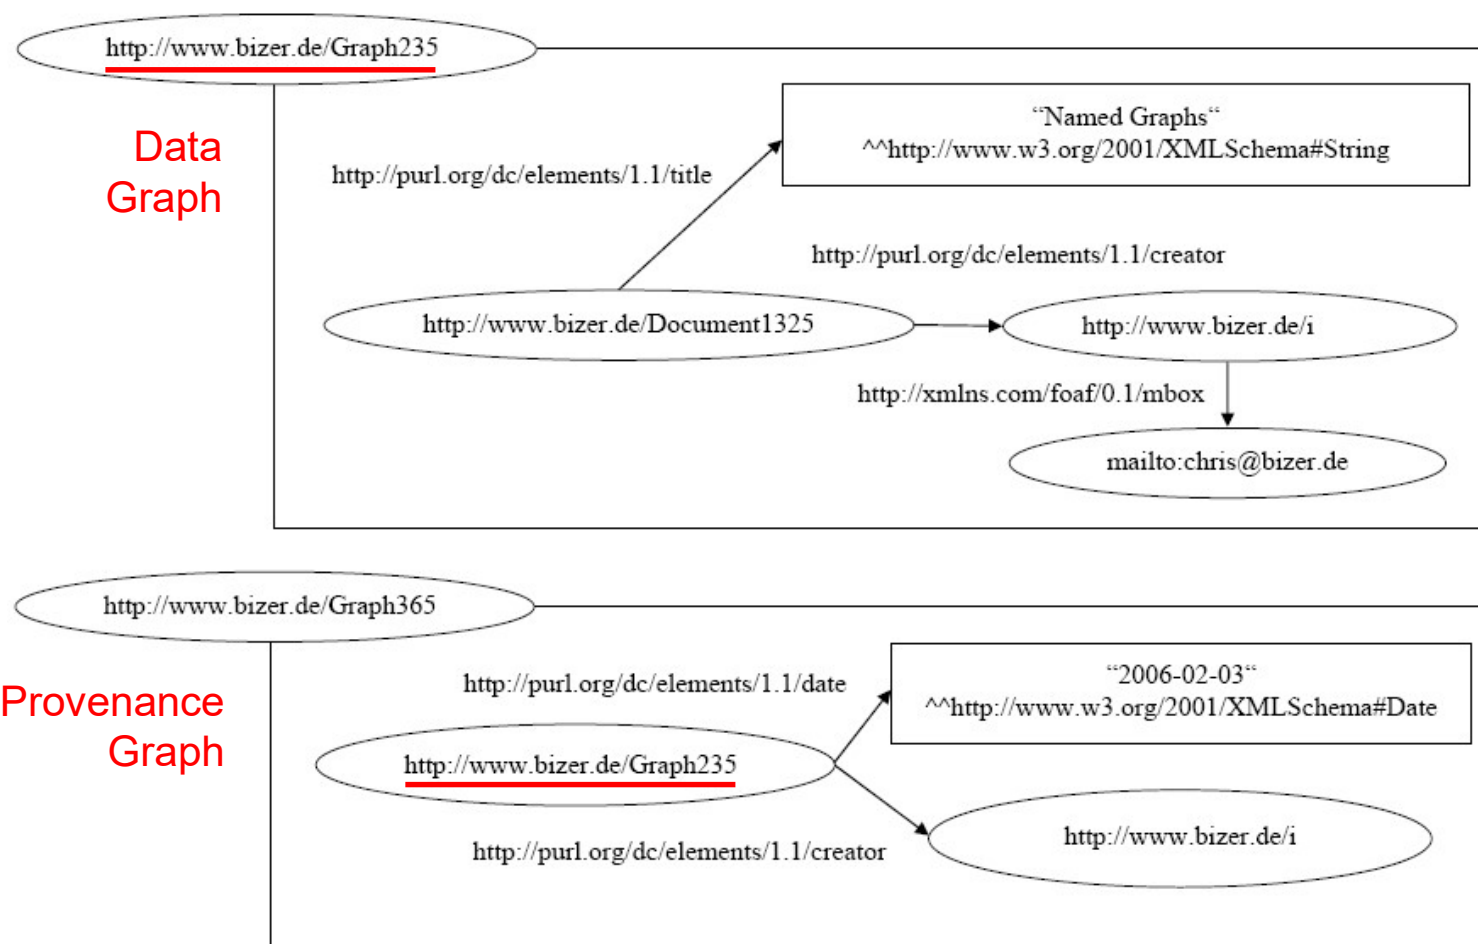

Carroll, Bizer, Hayes, Stickler:  
Named Graphs. Journal of  
Web Semantics, 2005.



# 4. Data Quality

**Data quality is a multi-dimensional construct which measures the “fitness for use” of data for a specific task.**

- Which quality dimensions matter depends on the task
- The required level of quality depends on the task and the user

## **Outline of this Subsection**

4.1 Data Quality Dimensions

4.2 Data Quality Assessment

# Data Quality in the Enterprise and Web Context

## – Enterprise Context

- the goal is to establish **procedures and rules** that guarantee high quality data production, quality monitoring, and regular data cleansing
- pioneering research by MIT Total Data Quality Management (TDQM) program
- consequences of low data quality:
  - US postal service: out of 100.000 mass-letters, 7.000 cannot be delivered because of wrong address
  - A.T. Kearny: 25%-40% of the operational costs result from low data quality as low quality data leads to wrong management decisions
  - SAS: Only 18% of all German companies trust their data

## – Web Context

- large number of data sources, but no possibility to influence data providers
- thus, focus on **identifying the high-quality subset** of the available data
- challenge: quality indicators are often sparse and unreliable

© 2014 Pearson Education, Inc. or its affiliate(s). All rights reserved.




| Category                       | IQ Criteria           | TDQM | MBIS | Weikum | DWQ | SCOUG | Chen |
|--------------------------------|-----------------------|------|------|--------|-----|-------|------|
| Content-related Criteria       | Accuracy              | Yes  | Yes  | Yes    | Yes | Yes   | Yes  |
|                                | Documentation         |      |      |        |     | Yes   |      |
|                                | Relevancy             | Yes  | Yes  |        | Yes |       | Yes  |
|                                | Value-Added           | Yes  |      |        |     | Yes   |      |
|                                | Completeness          | Yes  | Yes  | Yes    | Yes | Yes   | Yes  |
|                                | Interpretability      | Yes  |      |        | Yes |       |      |
| Technical Criteria             | Timeliness            | Yes  | Yes  | Yes    | Yes | Yes   | Yes  |
|                                | Reliability           |      |      | Yes    |     |       |      |
|                                | Latency               |      |      | Yes    |     |       | Yes  |
|                                | Performability        |      |      | Yes    |     | Yes   |      |
|                                | Response time         |      | Yes  | Yes    |     |       | Yes  |
|                                | Security              | Yes  |      | Yes    | Yes |       |      |
|                                | Accessibility         | Yes  | Yes  | Yes    | Yes | Yes   |      |
|                                | Price                 |      | Yes  | Yes    |     | Yes   |      |
|                                | Customer Support      |      |      |        |     | Yes   |      |
| Intellectual Criteria          | Believability         | Yes  | Yes  | Yes    | Yes | Yes   |      |
|                                | Reputation            | Yes  | Yes  |        | Yes |       |      |
|                                | Objectivity           | Yes  |      |        |     |       |      |
| Instantiation related Criteria | Verifiability         |      |      | Yes    |     |       |      |
|                                | Amount of data        | Yes  | Yes  |        |     |       | Yes  |
|                                | Understandability     | Yes  | Yes  |        |     |       |      |
|                                | Concise represent.    | Yes  |      |        |     |       |      |
|                                | Consistent represent. | Yes  | Yes  | Yes    | Yes | Yes   |      |

Source: Felix Naumann

## 4.2. Data Quality Assessment


Various **domain-specific heuristics** are used to measure data quality.

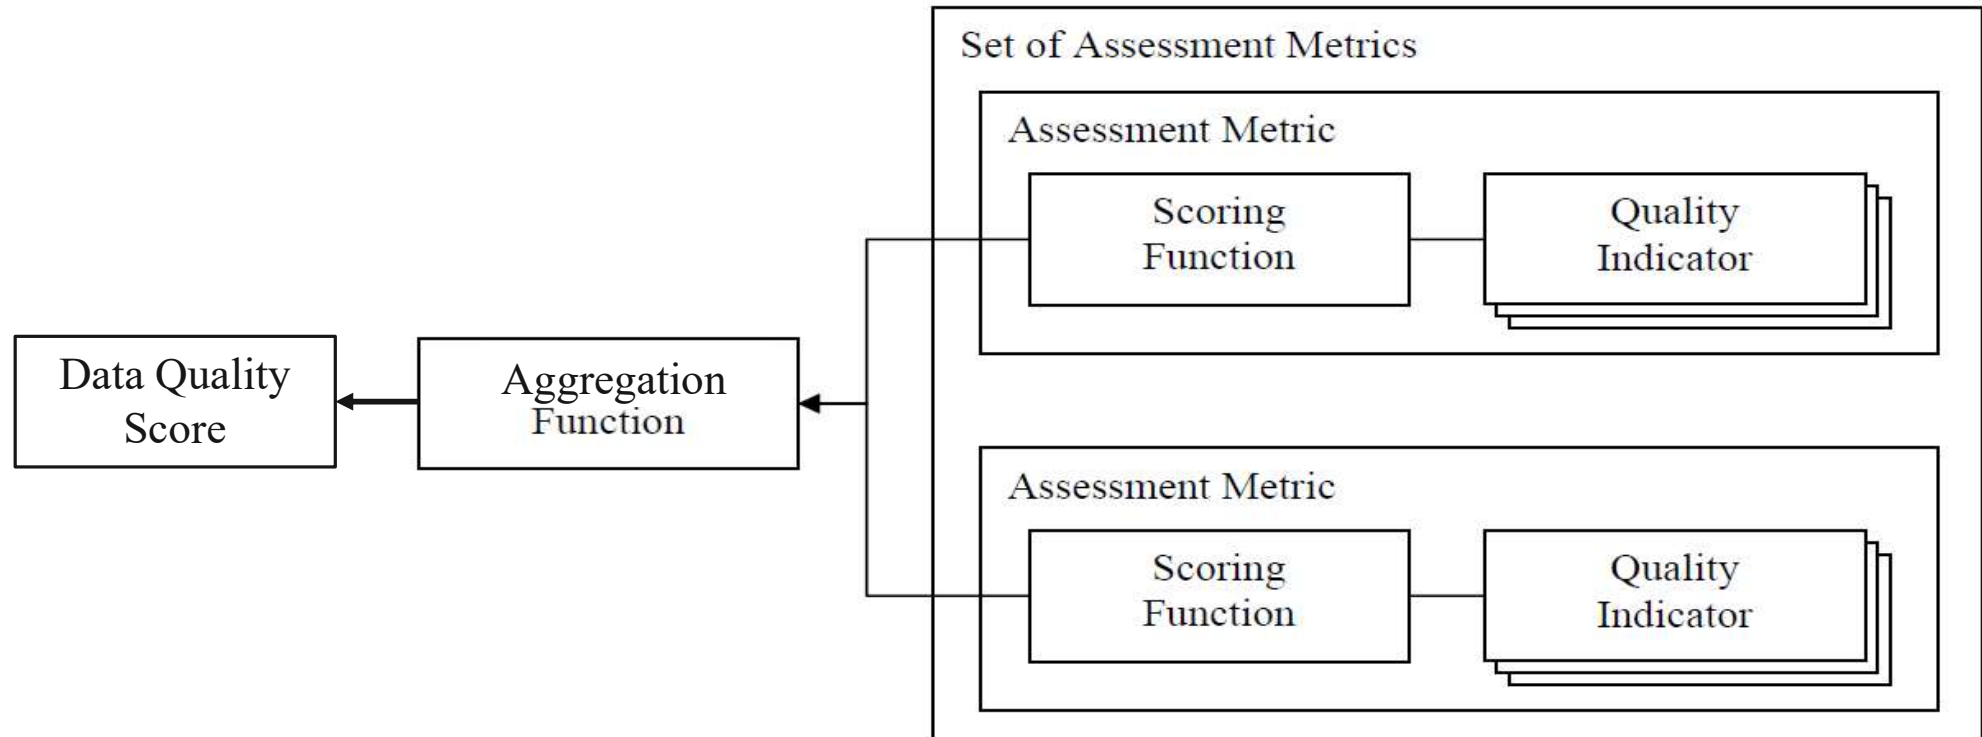

The **applicability** of specific heuristics depends on

1. Availability of quality indicators (like provenance information or ratings)
2. Quality of quality indicators (fake ratings, sparse provenance information)

# Quality Indicators in the Web Context

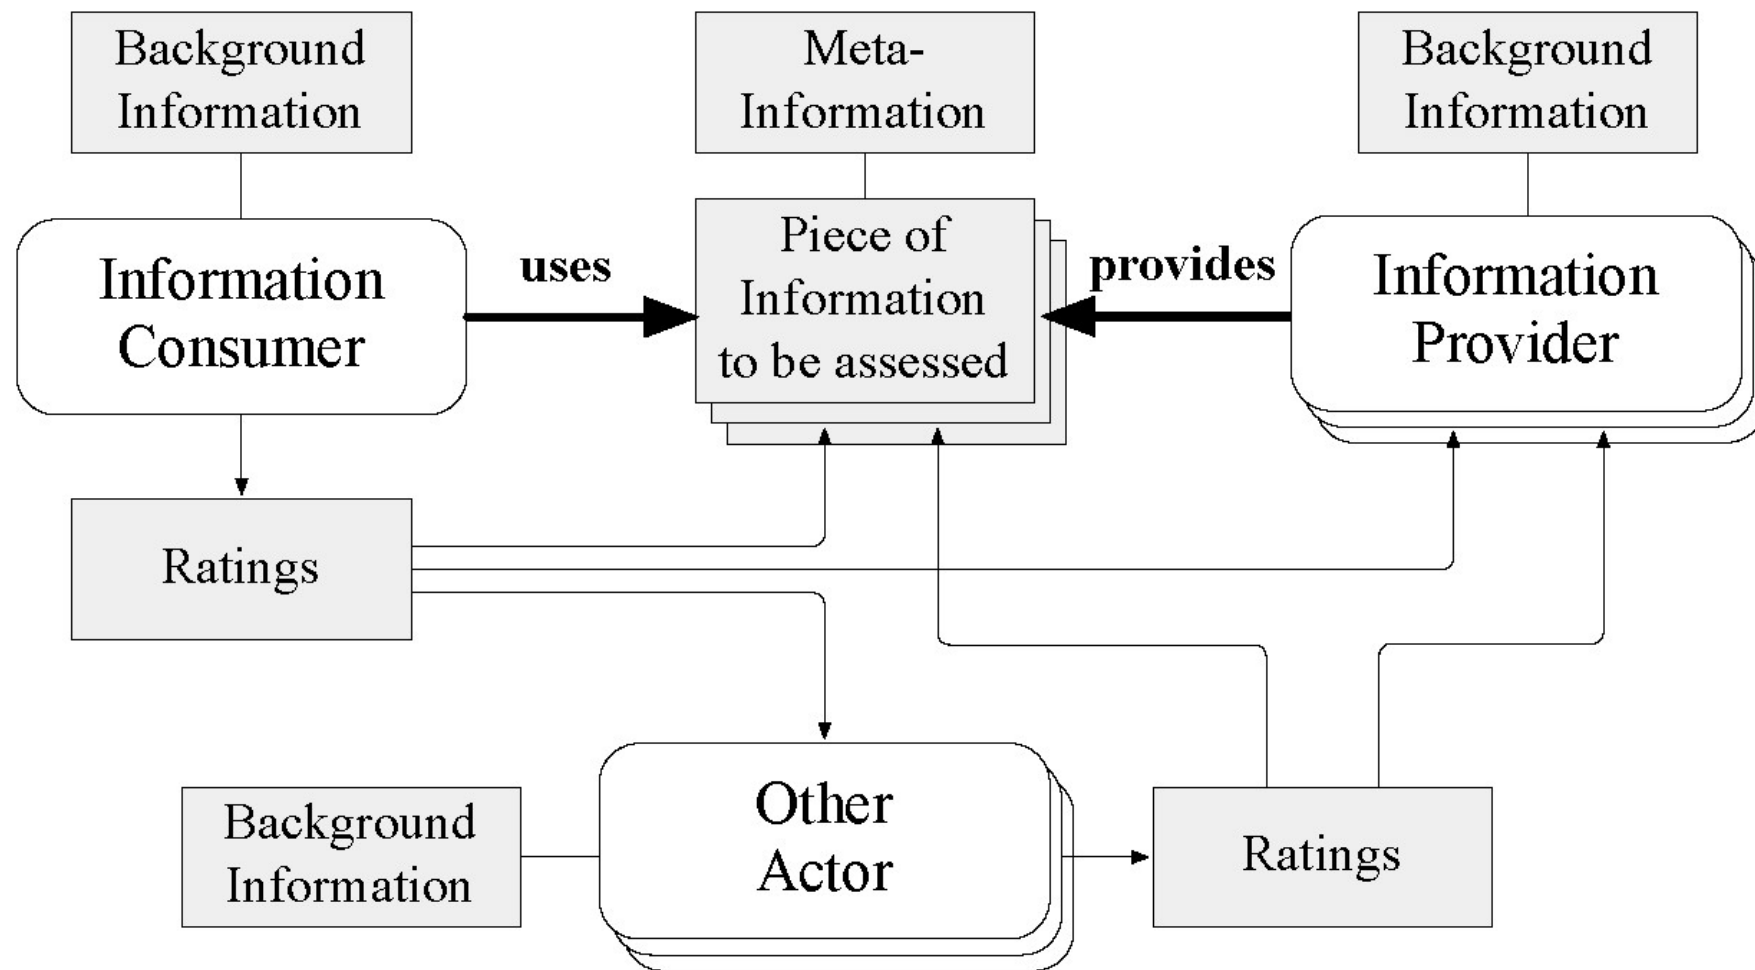



## 4.2.1 Assessing Data Accuracy


**Definition Accuracy:** The extent to which data is correct, reliable, and free of error.

– also called: **Truth Discovery, Fake News Detection**

– **Assessment Methods:**

1. Constraint testing
2. Outlier detection
3. Expert- or user ratings


– Relevant quality indicators:

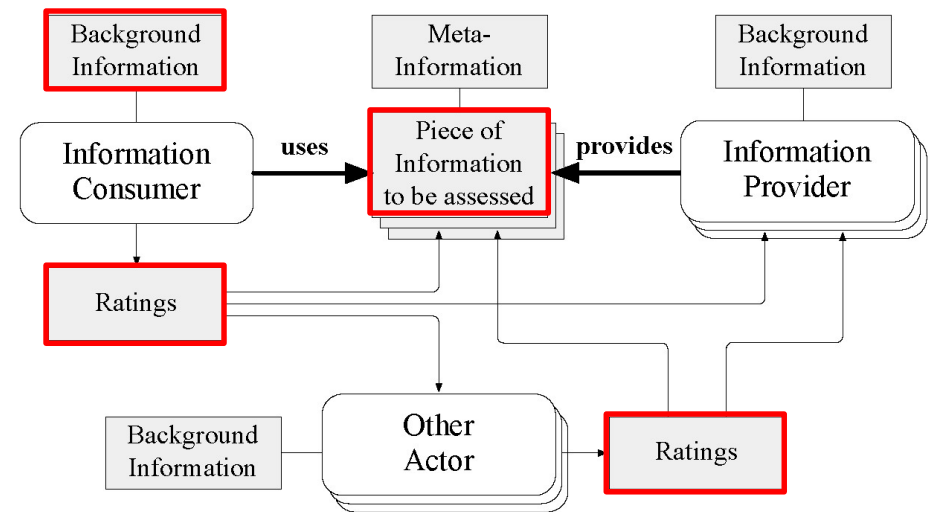

# Constraint Testing

**Match data against constraints and consistency rules in order to detect errors.**

- Examples of constraints
  - the age of humans should be between 0 and 130
  - books must have at least one author
- Examples of consistency rules
  - if person is in middle school, then age is (likely) below 25
  - if area code is 131, then the city should be Edinburgh
- Rule and constraint acquisition
  - define rules and constraints manually
  - or learn from examples e.g. using association analysis (see lecture Data Mining)

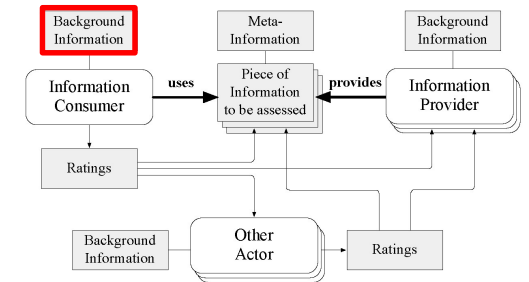


Fan, Geerts: Foundations of Data Quality Management. Morgan & Claypool, 2012.

# Outlier Detection

**An outlier is an individual data instance that is anomalous with respect to the rest of the data.**

- Outliers can be considered as errors and be assigned a low quality score
- Techniques
  - statistical distributions, clustering, classification
- Challenges
  - the exact notion of an outlier is different for different application domains
  - an individual may be a outlier w.r.t. a single attribute or a combination of multiple attributes
  - natural outliers: population of Mexico City
  - normal behaviour keeps evolving over time

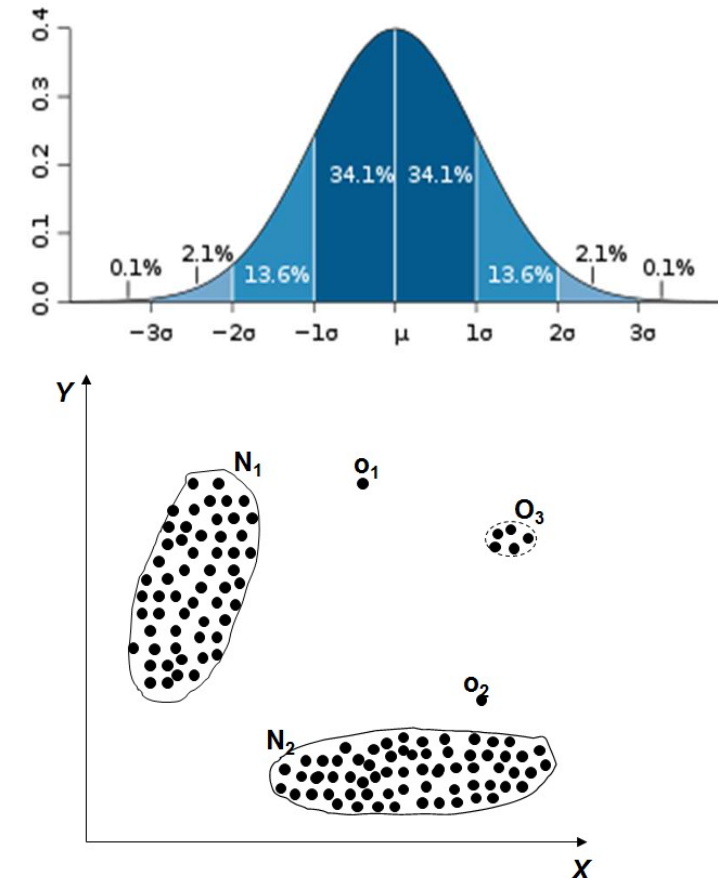


Chandola, et al.: Anomaly Detection: A Survey. ACM Computing Surveys, 2009.

# Ratings

**Data is often filtered or ranked based on ratings provided by users or experts.**

- Various scoring functions exist
  - practical systems often use simple, easily understandable functions
- Challenges:
  1. Motivate users to rate
    - data, data providers, data sources
  2. Quality of the ratings
    - fake ratings
    - clueless raters
- Events interpretable as positive ratings
  - clicks, page views
  - time spent on some page

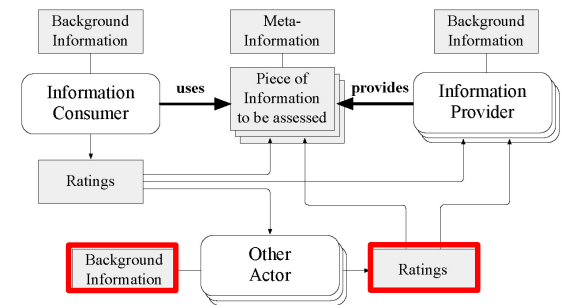


The screenshot shows a TripAdvisor page for 'The Place Luxury Boutique Villas' in Koh Tao, Thailand. The page displays two reviews. The first review, by 'ExplorerAsh', is dated October 11, 2011, and has a rating of 4.5 stars. The second review, by 'pcgrowler', is dated January 13, 2012, and has a rating of 4.5 stars. Both reviews are positive and mention the location, the view, and the service. The page also includes a 'Like' button and a 'Search for a' field.

## 4.2.2 Assessing Data Timeliness

**Definition Timeliness:** The extent to which the age of the data is appropriate for the task at hand.

- The assessment of the timeliness of data usually requires provenance data.
- Provenance metadata
  - HTTP Last-Modified
  - dc:date
- Fallbacks if no timestamps are available
  - propagate timestamps to data without timestamps
    - e.g. two tables provide same profit for a company, only one table has a timestamp
    - Zhang, Chakrabarti: InfoGather+, SIGMOD 2013.
  - use rules instead of timestamps
    - Number of children: Prefer higher value, as number of children of a person usually grows

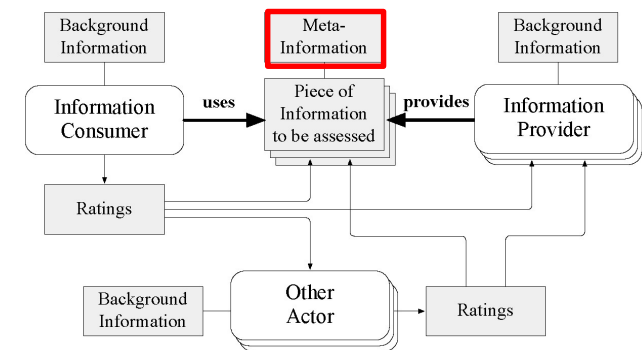

## 4.2.3 Assessing Data Completeness


**Definition Completeness:** The extent to which data is not missing and is of sufficient breadth, depth, and scope for the task at hand.

– Two perspectives on completeness:

- **Density:** Fraction of attributes filled
- **Coverage:** Fraction of real-world objects represented

– Assessment:

- Density
  - sample data source and calculate density from sample
- Coverage
  - hard to calculate as overall number of real-world objects is unknown in many cases: countries fine; products or people problematic
  - fallback: prefer data sources that describe more entities


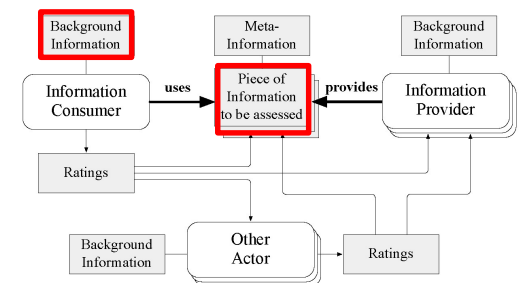


## 4.2.4 Assessing Data Relevancy

**Definition Relevancy: The extent to which data is applicable and helpful for the task at hand.**

### – Assessment:

- Example: TripAdvisor
  - Filter reviews based on background information about information provider
- Example: Google
  - Rank webpages based on search terms and PageRank score

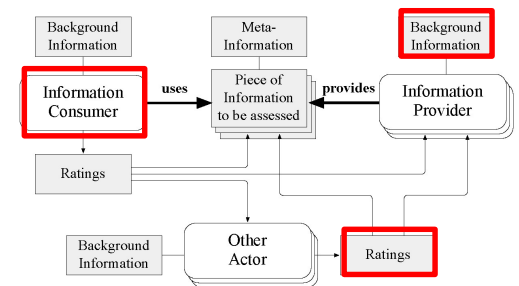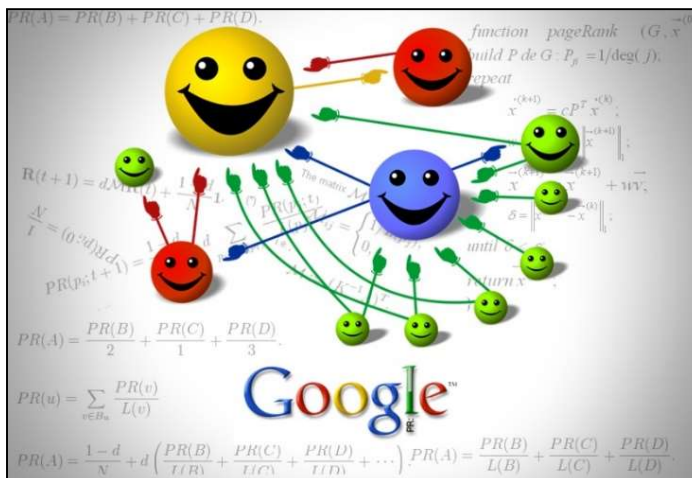

31 reviews from our community [Write a Review](#)

**Traveler rating**

|           |   |
|-----------|---|
| Excellent | 0 |
| Very good | 2 |
| Average   | 0 |
| Poor      | 3 |
| Terrible  | 3 |

**Trip type**

|                         |
|-------------------------|
| Family reviews (8)      |
| Couples reviews (12)    |
| Solo travel reviews (1) |
| Business reviews (0)    |
| Friends reviews (6)     |

Your selections **Families**

8 reviews sorted by **Date** **Rating**

English first

**“nightmare in koh tao”**

Reviewed January 10, 2010

We had booked three nights at the black tip resort and it was terrible. The staff is always in a bad mood, never polite or helpful. The beach was full of garbage and gazoi . we could not swim and it was worst everyday. The restaurant staff would never smile or say hi . Well, having travel many times in...


Was this review helpful? **Yes** 2 [Problem with this review?](#)



## 4.2.5 Assessing Believability / Trustworthiness

**Definition Believability / Trustworthiness: The extent to which data is regarded as true, real, and credible.**

- Subjective dimension which depends on the individual user
- **Assessment:**
  - individual experience with the data
  - fallbacks:
    - corporate guidance about sources
    - trust networks
- **Explanations** about the data quality assessment process
  - in order to trust data, users should understand why the system regards data to be high quality
  - Tim Berners-Lee's “Oh, yeah?”-button

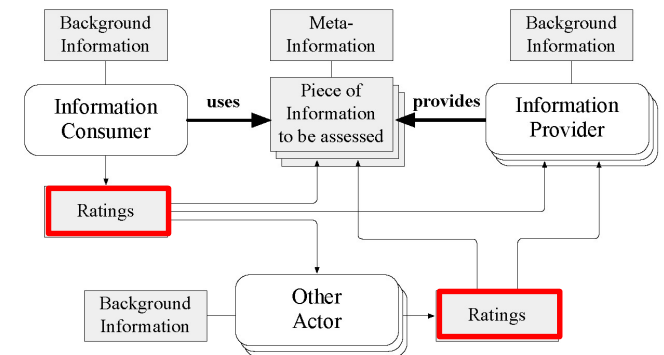

## Prototype: The WIQA - Browser

- Enables users to employ different quality assessment policies
- Can explain assessment results

WIQA Browser - Mozilla Firefox

Datei Bearbeiten Ansicht Gehe Lesezeichen Extras Hilfe

http://127.0.0.1:1978/piggy-bank/e1eb9ba7fe10653332021055d7562c83/default?command=browse&policyURI=Information+from+German+analysts&... Go

[WIQA Browser]

# WIQA Browser

19.07.2006 14:35:50

1 filter criterion

- is a: Share (remove) [add more]

Order Commands

2 items  
sorted by name [A to Z]

urn:ISIN:DE0007236101 [URI]

emitted by urn:DUNS:316067164

is a Share

positive analyst report

Siemens agrees partnership with Novell unit SUSE. Siemens Business Services (SBS), the IT services arm of German technology conglomerate Siemens, said on Tuesday it had agreed a partnership deal with Novell's Linux. Linux software is open-source, meaning it can be freely copied and modified. Novell's software such as Microsoft (nasdaq: MSFT - news - asking more and more for open-source platforms, SBS is one of Europe's top 10 partner status. SBS is one of Europe's top 10 exclusive province of a few dedicated enthusiasts, supported by U.S. giant International Business Machines (nyse: IBM - news - people), among others. Its advocates, who include big businesses and government departments, argue it is cheaper, simpler and more secure than Windows.

Show Referers

Delete

urn:ISIN:US4581401001 [URI]

is a Share

negative analyst report

Intel investiert Milliarden in Werks-Modernisierung. Der weltgroesste Chiphersteller Intel will nach Firmenangaben mit milliardenschweren Investitionen seine aelteren Werke modernisieren, um ihnen die Fertigung kleinerer Mikroprozessoren zu ermöglichen. Ziel ist die Umstellung aelterer Anlagen auf die Produktion von 65-Nanometer- von 90-Nanometer-Chips. Der Konzern befinde sich mitten in einem Modernisierungsprogramm ueber fuenf Mrd. Dollar, sagte Intel-Chef Craig Barret am Sonntag zum 30. Jahrestag der Taetigkeit von Intel in Israel. Die aelteren Anlagen sollen auf die Produktion von 65-Nanometer- von 90-Nanometer-Chips (ein Nanometer ist ein Millionstel Millimeter) umgestellt werden. Wir haben eine Menge 65-Nanometer-Investitionen. Dafuer geht der groesste Teil der Aufwendungen von 5 Mrd. \$ drauf, sagte Barret. Er verwies dazu insbesondere auf die US-Werke in Phoenix, Portland und Oregon sowie die Anlage in Irland. In zwei Jahren seien noch kleinere Halbleiter moeglich, sagte er. Im zweiten Halbjahr 2007 sollte es die 45-Nanometer- Technologie geben, erlaeuerte Barret. Er lehnte es jedoch ab, sich zu den Finanzergebnissen des Konzerns zu aendern. Er sagte lediglich, das Geschaef wachse weltweit. Kraeftiges Wachstum sei in den Schwellenlaendern zu verzeichnen.

Show Referers

Fertig

Policy Selection Panel

Type here to search

- is a
- name
- discussion forum posting
- emitted by
- positive analyst report
- negative analyst report

Policy: Information from German analysts

- Information from German analysts
- Information from positively rated information providers
- New information from highly rated analysts
- Only German or English information
- Accept only information from Deutsche Bank
- More positive Ratings
- TidalTrust rating above 5
- Asserted by two different analysts
- Asserted by analysts with at least 3 positive ratings
- Accept everything

Simile

# Explanation about an Assessment Decision

The screenshot shows a Mozilla Firefox browser window titled "WIQA Browser - Mozilla Firefox". The address bar shows a URL: `http://127.0.0.1:1978/piggy-bank/e1eb9ba7fe10653332021055d7562c83/default?command=browse&policyURI=Information+from+German+analysts&=&%40lwq.project.Proj`. The page content is titled "WIQA Browser" and shows a list of items. The first item is "1 filter criterion" with a bullet point "is a: Share (remove) [add more]". Below this, there are two items listed, each with a "urn" and a "positive analyst report". The first item has a "urn:ISIN:DE0007236101" and a "positive analyst report" that says "Siemens agrees partnership with Novell unit SUSE. Siemens Business Services (SBS), the IT services arm of German technology conglomerate Siemens <SIEGn.DE>, said on Tuesday it had agreed a partnership deal with Novell's (nasdaq: NOVL - news - people) newly acquired unit SUSE Linux. Linux software is open-source, meaning it can be freely copied and modified, unlike proprietary software such as Microsoft (nasdaq: MSFT - news - people) Windows. In the past months clients have been asking more and more for open-source platforms, SBS said in a statement which said SUSE would have premier partner status. SBS is one of Europe's top 10 information technology service providers. Linux, once the exclusive province of a few dedicated enthusiasts, is now seen as the only serious rival to Windows and is supported by U.S. giant International Business Machines (nyse: IBM - news - people), among others. Its advocates, who include big businesses and government departments, argue it is cheaper, simpler and more secure than Windows." The second item has a "urn:ISIN:US4581401001" and a "negative analyst report" that says "Intel investiert Milliarden in Werks-Modernisierung. Der weltgroesste Chiphersteller Intel will nach Firmenangaben mit milliardenschweren Investitionen seine aelteren Werke modernisieren, um ihnen die Fertigung kleinerer Mikroprozessoren zu ermoeeglichen. Ziel ist die Umstellung aelterer Anlagen auf die Produktion von 65-Nanometer- von 90-Nanometer-Chips. Der Konzern befindet sich mitten in einem Modernisierungsprogramm ueber fuenf Mrd. Dollar, sagte Intel-Chef Craig Barret am Sonntag zum 30. Jahrestag der Taetigkeit von Intel in Israel. Die aelteren Anlagen sollen auf die Produktion von 65-Nanometer- von 90-Nanometer-Chips (ein Nanometer ist ein Millionstel Millimeter) umgestellt werden. Wir haben eine Menge 65-Nanometer-Investitionen. Dafuer geht der groesste Teil der Aufwendungen von 5 Mrd. \$ drauf, sagte Barret. Er verwies dazu insbesondere auf die US-Werke in Phoenix, Portland und Oregon sowie die Anlage in Irland. In zwei Jahren seien noch kleinere Halbleiter moeglich, sagte er. Im zweiten Halbjahr 2007 sollte es die 45-Nanometer- Technologie geben, erklarte Barret. Er lehnte es jedoch ab, sich zu den Finanzergebnissen des Konzerns zu aendern. Er sagte lediglich, das Geschaef wachse weltweit. Kraeftiges Wachstum sei in den Schwellenlaendern zu verzeichnen." An "EXPLANATION" dialog box is open, showing the title "EXPLANATION" and the text "The Triple: Siemens Share positive analyst report Siemens agrees partnership with Novell unit SUSE. Siemens Business Services (SBS), the IT services arm of German technology conglomerate Siemens <SIEGn.DE>, said on Tuesday it had agreed a partnership deal with Novell's (nasdaq: NOVL - news - people) newly acquired unit SUSE Linux. Linux software is open-source, meaning it can be freely copied and modified, unlike proprietary software such as Microsoft (nasdaq: MSFT - news - people) Windows. In the past months clients have been asking more and more for open-source platforms, SBS said in a statement which said SUSE would have premier partner status. SBS is one of Europe's top 10 information technology service providers. Linux, once the exclusive province of a few dedicated enthusiasts, is now seen as the only serious rival to Windows and is supported by U.S. giant International Business Machines (nyse: IBM - news - people), among others. Its advocates, who include big businesses and government departments, argue it is cheaper, simpler and more secure than Windows." Below this, it says "fulfils the policy: Use only information which has been asserted by German analysts." and "because: it is stated in the document Information from Peter Smith, which is asserted by the German analyst Peter Smith." The dialog box has a "Close" button and a "Fertig" button at the bottom.

WIQA Browser  
19.07.2006 14:35:50

1 filter criterion

- is a: Share (remove) [add more]

Order Commands

2 items  
sorted by name [A to Z]

urn:ISIN:DE0007236101

emitted by urn:DUNS:316067164

is a Share

positive analyst report Siemens agrees partnership with Novell unit SUSE. Siemens Business Services (SBS), the IT services arm of German technology conglomerate Siemens <SIEGn.DE>, said on Tuesday it had agreed a partnership deal with Novell's (nasdaq: NOVL - news - people) newly acquired unit SUSE Linux. Linux software is open-source, meaning it can be freely copied and modified, unlike proprietary software such as Microsoft (nasdaq: MSFT - news - people) Windows. In the past months clients have been asking more and more for open-source platforms, SBS said in a statement which said SUSE would have premier partner status. SBS is one of Europe's top 10 information technology service providers. Linux, once the exclusive province of a few dedicated enthusiasts, is now seen as the only serious rival to Windows and is supported by U.S. giant International Business Machines (nyse: IBM - news - people), among others. Its advocates, who include big businesses and government departments, argue it is cheaper, simpler and more secure than Windows.

Show Referers

Delete

urn:ISIN:US4581401001

is a Share

negative analyst report Intel investiert Milliarden in Werks-Modernisierung. Der weltgroesste Chiphersteller Intel will nach Firmenangaben mit milliardenschweren Investitionen seine aelteren Werke modernisieren, um ihnen die Fertigung kleinerer Mikroprozessoren zu ermoeeglichen. Ziel ist die Umstellung aelterer Anlagen auf die Produktion von 65-Nanometer- von 90-Nanometer-Chips. Der Konzern befindet sich mitten in einem Modernisierungsprogramm ueber fuenf Mrd. Dollar, sagte Intel-Chef Craig Barret am Sonntag zum 30. Jahrestag der Taetigkeit von Intel in Israel. Die aelteren Anlagen sollen auf die Produktion von 65-Nanometer- von 90-Nanometer-Chips (ein Nanometer ist ein Millionstel Millimeter) umgestellt werden. Wir haben eine Menge 65-Nanometer-Investitionen. Dafuer geht der groesste Teil der Aufwendungen von 5 Mrd. \$ drauf, sagte Barret. Er verwies dazu insbesondere auf die US-Werke in Phoenix, Portland und Oregon sowie die Anlage in Irland. In zwei Jahren seien noch kleinere Halbleiter moeglich, sagte er. Im zweiten Halbjahr 2007 sollte es die 45-Nanometer- Technologie geben, erklarte Barret. Er lehnte es jedoch ab, sich zu den Finanzergebnissen des Konzerns zu aendern. Er sagte lediglich, das Geschaef wachse weltweit. Kraeftiges Wachstum sei in den Schwellenlaendern zu verzeichnen.

Show Referers

Fertig

EXPLANATION  
WIQA Browser

The Triple:

Siemens Share positive analyst report Siemens agrees partnership with Novell unit SUSE. Siemens Business Services (SBS), the IT services arm of German technology conglomerate Siemens <SIEGn.DE>, said on Tuesday it had agreed a partnership deal with Novell's (nasdaq: NOVL - news - people) newly acquired unit SUSE Linux. Linux software is open-source, meaning it can be freely copied and modified, unlike proprietary software such as Microsoft (nasdaq: MSFT - news - people) Windows. In the past months clients have been asking more and more for open-source platforms, SBS said in a statement which said SUSE would have premier partner status. SBS is one of Europe's top 10 information technology service providers. Linux, once the exclusive province of a few dedicated enthusiasts, is now seen as the only serious rival to Windows and is supported by U.S. giant International Business Machines (nyse: IBM - news - people), among others. Its advocates, who include big businesses and government departments, argue it is cheaper, simpler and more secure than Windows.

fulfils the policy:

Use only information which has been asserted by German analysts.

because:

- it is stated in the document Information from Peter Smith, which is asserted by the German analyst Peter Smith.

Close

Fertig

# Example Explanation

The triple:

- Siemens AG has positive analyst report: "As Siemens agrees partnership with Novell unit SUSE ..."

fulfills the policy:

- Accept only information that has been asserted by people who have received at least 3 positive ratings.

because:


- it was asserted by Peter Smith and
- Peter Smith has received positive ratings from
  - Mark Scott who works for Siemens.
  - David Brown who works for Intel.
  - John Maynard who works for Financial Times.

# Summary

- Data quality assessment is essential for web data integration as **errors accumulate**:
  1. Quality of the external data sources (everybody can publish on the Web)
  2. Quality of the integration process (wrong mappings, wrong identity resolution)
- Many data quality problems only become visible when we integrate data from multiple sources
- A wide **range of different quality assessment heuristics** can be used
  - content-based, provenance-based, rating-based metrics
- The **applicability** of the heuristics depends on
  - the availability of quality indicators (like provenance information or ratings)
  - quality of quality indicators (fake ratings, coarse grained provenance)
- Many systems only try to assess the accuracy and the timeliness of web data and ignore the other quality dimensions

## 5. Data Fusion

**Given multiple records that describe the same real-world entity, create a single record while resolving conflicting data values.**

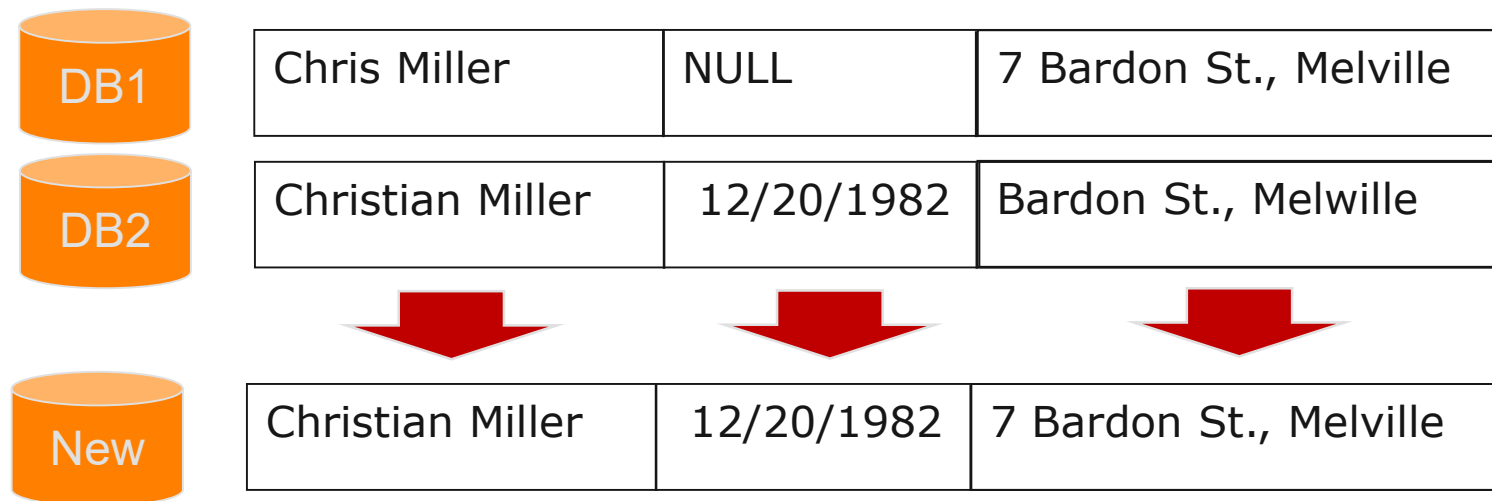

- Goal: Create a **single high-quality record**.
- Two basic fusion situations: **Slot Filling** and **Conflict Resolution**



# 5.1 Slot Filling and Conflict Resolution


**Slot Filling:** Fill missing values (NULLs) in one dataset with corresponding values from other datasets.

Result: increased dataset density



**Conflict Resolution:** Resolve contradictions between records by applying a conflict resolution function (heuristic).

Result: increased data quality

Complementary records

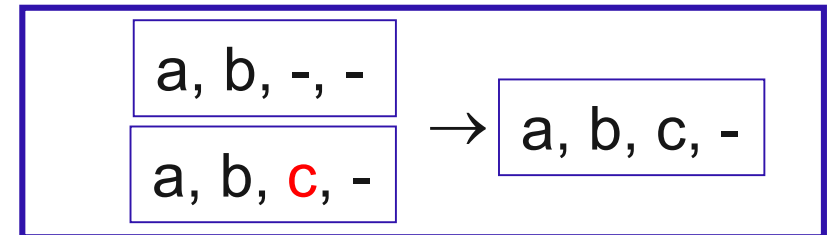

Conflicting records

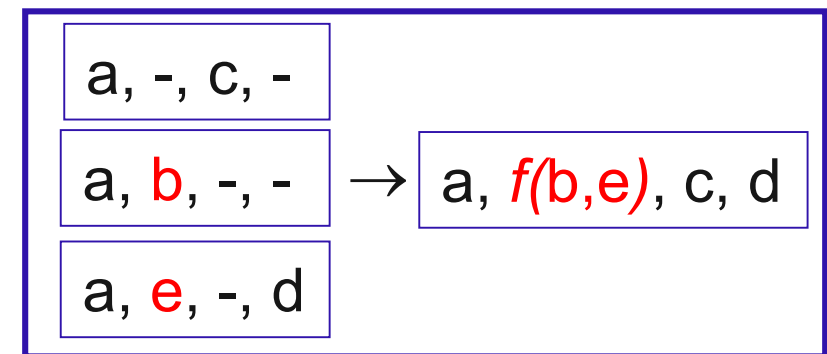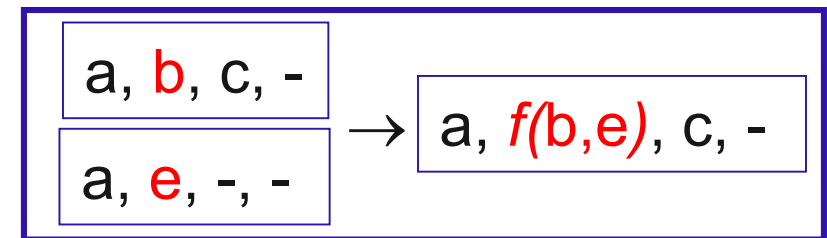



# Cluster Size Distribution, Matching Errors, and Data Fusion

- As final step of the identity resolution process, records are clustered using the discovered correspondences. Example with 3 data sources:

| Cluster Size | Frequency |
|--------------|-----------|
| 1            | 4256      |
| 2            | 939       |
| 3            | 503       |
| 4            | 75        |
| 5            | 14        |
| 35           | 3         |
| 61           | 1         |


No slot filling possible as single records with no overlap

Slot filling and conflict resolution allow the generation of improved records

Large cluster size indicates matching errors or duplicates in data sources

- Cluster size distribution from matching web tables to DBpedia

- Out of 33.3 million web tables, 949,970 tables contain at least one matching row
- 42% of the clusters have a size of 2
- 16% of the clusters have a size of 3
- 39% of the clusters have a size of at least 4
- 13% of the clusters have a size of at least 11

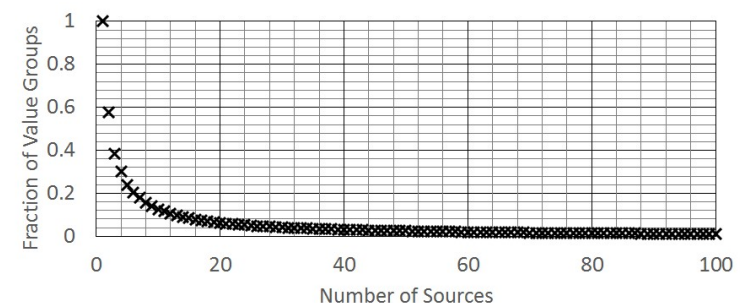

Ritze, et al.: Profiling the Potential of Web Tables for Augmenting Cross-domain Knowledge Bases. WWW 2016.

## 5.2 Conflict Resolution Functions

- Conflict resolution functions are attribute-specific
  - you select or learn a specific function for each attribute that should be fused
- There is a wide range of different functions (**heuristics**) that fit different requirements
- Functions differ in regard to the data types, they can be applied for
  - numerical values (e.g. population of a place)
  - nominal values (e.g. name of a person)
  - sets of values (e.g. actors performing in a movie)
- Two main categories of conflict resolution functions
  1. **Content-based functions** that rely only on the data values to be fused
  2. **Metadata-based functions** that rely on provenance data, ratings, or quality scores

$$V_F = f(V_A, M_A, B)$$

Diagram illustrating the components of the conflict resolution function  $V_F = f(V_A, M_A, B)$ :


- $V_F$ : Fused Value
- $V_A$ : Input Values
- $M_A$ : Meta-Information
- $B$ : Background Knowledge

# Content-based Conflict Resolution Functions


| Function                   | Explanation                                                           | Use Case           |
|----------------------------|-----------------------------------------------------------------------|--------------------|
| Average, Median            | Calculate average/median of all values                                | Rating             |
| Longest, Shortest          | Choose longest / shortest value                                       | First name         |
| Max, Min                   | Take maximal, minimal value                                           | Number of children |
| Vote                       | Majority decision (one vote per site or page?)                        | Mayor of city      |
| Clustered Vote             | Choose centroid / medoid of largest cluster                           | Population of city |
| Weighted Vote              | Weight sources according to the fraction of true values they provided | Address of a shop  |
| Union                      | Union of all values ( $A \cup B \cup C$ )                             | Product Reviews    |
| Intersection               | Intersection of all values ( $A \cap B \cap C$ )                      | Movie Actors       |
| IntersectionKSources       | Values must appear in at least k sources                              | Movie Actors       |
| MostComplete               | Choose value from record that is most complete                        | Postal addresses   |
| MostAbstract, MostSpecific | Use a taxonomy / ontology                                             | Location           |
| Random                     | Fallback: Choose random value                                         |                    |

# Clustered Vote: Which Values are Similar Enough?

- Approach:
  1. Calculate similarity of values
    - using an appropriate similarity function (see slideset Identity Resolution)
  2. Treat similar values as equal (similarity above threshold)
- Example: Mayor of Berlin

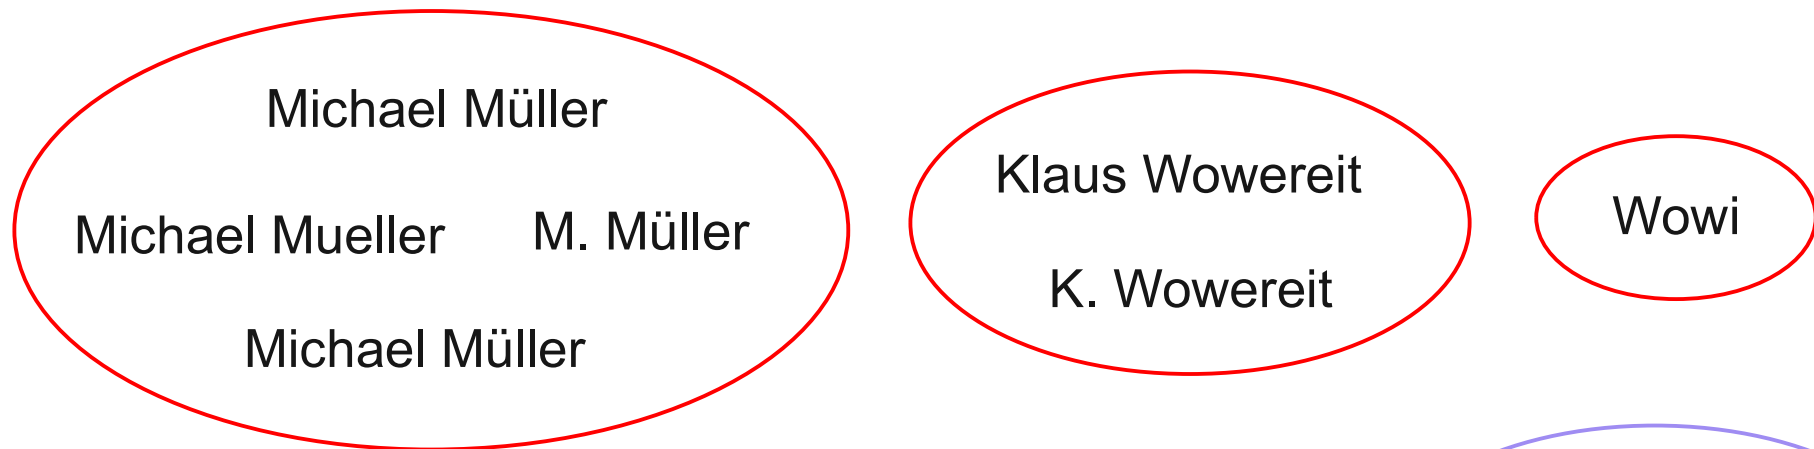


Example: Population of Berlin

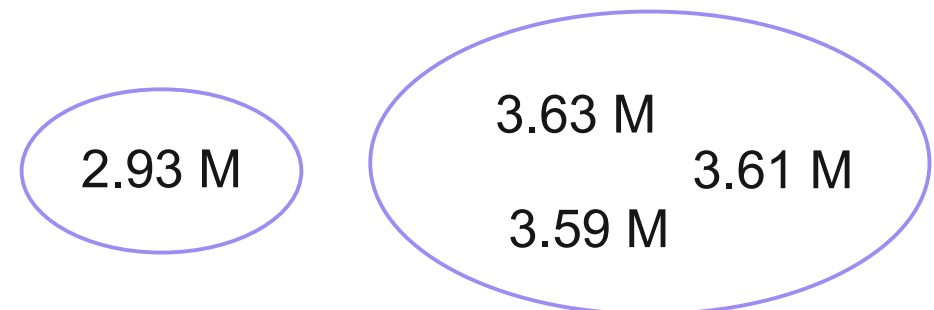

# Metadata-based Conflict Resolution Functions

| Function                       | Explanation                                                                                                                                          |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| FavorSources                   | Take first non-null value in particular order of sources<br>Example: Use Eurostat for GDP, alternatively use Wikipedia                               |
| MostRecent                     | Choose most recent (up-to-date) value<br>Example: Address, phone number                                                                              |
| MostActive                     | Choose value that is most often accessed/edited<br>Example: Prefer Wikipedia page with more edits                                                    |
| FavorSources<br>basedOnRatings | Calculate quality of sources from ratings, take value from source with highest score or all values from sources with scores above specific threshold |
| MaxIQ                          | Choose the value with the highest quality score. Score might cover multiple quality dimensions, e.g. timeliness and believability of a source        |
| TopkIQ                         | Choose the top K values with the highest quality scores                                                                                              |
| ClusterVoteAfter<br>Filtering  | Filter values using quality scores and apply clustered vote afterwards                                                                               |
| ....                           | ....                                                                                                                                                 |

# Example: Complete Conflict Resolution Heuristic



|            |             |           |        |                                                                                            |
|------------|-------------|-----------|--------|--------------------------------------------------------------------------------------------|
| 0766607194 | H. Melville | Moby Dick | \$3.98 |  Review |
|------------|-------------|-----------|--------|--------------------------------------------------------------------------------------------|

Favor Sources  
(amazon.com)


Max Length

Random

Most Recent

Union

|            |                 |           |        |                                                                                                                                                                           |
|------------|-----------------|-----------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0766607193 | Herman Melville | Mopy Dick | \$5.99 |   |
|------------|-----------------|-----------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



## 5.3 Evaluation of Fusion Results

1. Data Centric Evaluation Measures
  - Density
  - Consistency
2. Ground Truth Based Evaluation Measures
  - Accuracy



**Density measures the fraction of non-NULL values.**

$$density_{Column} = \frac{|non-NULL\ values\ in\ column|}{|rows\ in\ table|}$$

$$density_{Table} = \frac{|non-NULL\ values\ in\ table|}{|columns| * |rows|}$$

- As a result of schema integration, translated tables often contain many null values (empty columns)
- We are interested in the density increase after fusion
  1. Measure density of table A or column  $C_1$
  2. Fuse table A with table B
  3. Measure density of resulting table A' or column  $C_1'$

# Consistency

**A data set is consistent if it is free of conflicting information.**

$$\textit{consistency}_{\textit{column}} = \frac{|\textit{non-conflicting values in column}|}{|\textit{real-world entities described}|}$$

$$\textit{consistency}_{\textit{Table}} = \frac{|\textit{non-conflicting values in table}|}{|\textit{columns}| * |\textit{real-world entities described}|}$$

Measurement:

1. Group records that refer to same real-world entity
  - using correspondences discovered by identity resolution
2. Calculate fraction of non-conflicting attribute values
  - same attribute value is provided by all data sources

**Accuracy: Fraction of correct values selected by conflict resolution function.**

$$accuracy = \frac{|correct\ values|}{|all\ values|}$$

$$error\ rate = 1 - accuracy$$


Measurement:

1. Gather Ground Truth
  - Manually determine correct values for a subset of the records
  - Alternative: Use/buy correct data from external provider
  - Can be tricky as this requires you or external provider to know the truth!
2. Compare values after fusion with true values

Gao, et al.: Efficient Knowledge Graph Accuracy Evaluation. VLDB Endowment, 2019.

# How to Treat Similar Values?

- Treatment of similar values matters for calculating **consistency** and **accuracy**.
- Approach:
  1. Calculate similarity of values
    - using an appropriate similarity function (see slideset Identity Resolution)
  2. Treat similar values as equal (similarity above threshold)
- Example: Mayor of Berlin

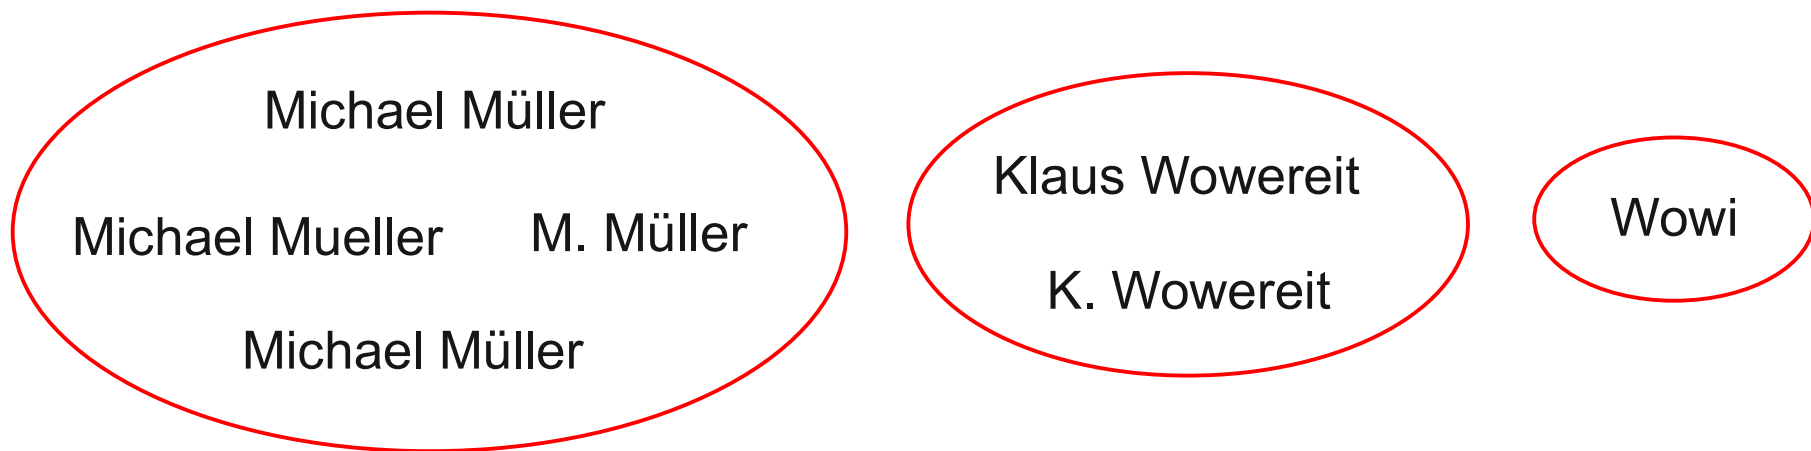

## 5.4. Example Data Fusion Tool: Fuz!on

**Fuzzy Fuz!on** [Additional Information] [Test/Debug]

Automatic Fusion | **Rule-based Fusion** | Manual Fusion

Rule Matrix

|                   | Firstname | Lastname | Street | houzenumber | postcode | city  | ignore | phone |
|-------------------|-----------|----------|--------|-------------|----------|-------|--------|-------|
| None              | 66105     | 68111    | 58872  | 66404       | 63121    | 71285 | 100000 | 73936 |
| Null values       | 5671      | 6402     | 6116   | 16746       | 12208    | 5643  | 0      | 26064 |
| Case Variance     | 10835     | 12745    | 14563  | 0           | 0        | 11330 | 0      | 0     |
| Abbreviation      | 7095      | 1170     | 8256   | 16850       | 12364    | 942   | 0      | 0     |
| Tokenization      | 0         | 0        | 0      | 0           | 0        | 0     | 0      | 0     |
| Substrings        | 2122      | 2091     | 1088   | 0           | 12307    | 1701  | 0      | 0     |
| Dominance         | 2170      | 2424     | 2883   | 0           | 0        | 2434  | 0      | 0     |
| Low edit distance | 5913      | 7057     | 7101   | 0           | 0        | 6664  | 0      | 0     |
| Global dominance  | 88        | 0        | 762    | 0           | 0        | 1     | 0      | 0     |
| Undefined         | 1         | 0        | 359    | 0           | 0        | 0     | 0      | 0     |

Actions

Fusionsregel(n) anzeigen/erzeugen ☒ Nur aktuelle Markierung anzeigen **WEITER -->**

Selected Rules

Regeldefinition (Status: neu)

Spalten  
Firstname  
Lastname

Konflikttypen  
Low edit distance

Primäre Konfliktauflösung  
Vote  
Minimum fraction of solution (in %) : 50

☒ Ignore case  
☒ Ignore null-values

Sekundäre Konfliktauflösung  
First

Aktionen  
Übernehmen  
Ausblenden  
Spalte hinzufügen  
Konflikttyp hinzufügen

Prototype  
developed at  
Hasso Plattner  
Institute

# Manual Fusion of Record Groups in Fuz!on

**Fuzzy Fuz!on** Additional Information Test/Debug

Automatic Fusion Rule-based Fusion **Manual Fusion**

Groups 0 to 50 of 100000 All Groups ☐ Filter Mode

| fdb.group   | Firstname | Lastname    | Street          | houzenumber | postcode | city      | ignore   | phone |
|-------------|-----------|-------------|-----------------|-------------|----------|-----------|----------|-------|
| 31750025-01 | Werner    | Trimpert    | Thomas-Man...   | 89          | 24943    | Kiel      | 19470524 | 0461  |
| 31758055-01 | Artur     | Heiser      | Kalkgrund       | 4           | 24939    | Kiel      | 19360106 |       |
| 31765505-01 | Siegfried | Aswegen     | Mürwiker Str.   | 6           | 4943     | Flensburg | 19250404 | 0461  |
| 31772625-01 | M.        | Blankenburg | Harmsstr.       | 48          | 24116    | Kiel      | 19610727 | 0461  |
| 31780965-01 | K         | Degen       | Peter-Chr.-H... | 5           | 24114    | Flensburg | 19630331 | 0461  |
| 31789325-01 | Manh The  | Knaut       | Wiedeberger ... | 37          | 24943    | Flensburg | 19280312 | 0461  |
| 31798345-01 | horst     | Booitsmann  |                 | 6           | 24937    | Flensburg | 19281225 | 0461  |

Back Next

21. Group :

|       | Firstname | Lastname | Street               | houzenumber | postcode | city      | ignore   | phone |
|-------|-----------|----------|----------------------|-------------|----------|-----------|----------|-------|
|       | Manh The  | Knaut    | Wiedeberger Weg      | 37          | 24943    | Flensburg | 19280312 | 0461  |
|       | Manh The  | KNAUT    | Wiedeberger Weg      |             | 24943    | Flensburg | 19280312 | 0461  |
|       | Manh      | Knaut    | WIEDEBERGER WEG      | 37          | 24943    | Flensburg | 19280312 | 0461  |
| First | Mixed ... | Vote     | First non-null value | First       | First    | First     | First    | First |
|       | Manh The  | Knaut    | Wiedeberger Weg      | 37          | 24943    | Flensburg | 19280312 | 0461  |

Merge Save Configurations



# 5.5 Case Study: DBpedia Cross-Language Data Fusion

- Infoboxes in different Wikipedia editions contain conflicting values.
- Which value to prefer?



**WIKIPEDIA**  
The Free Encyclopedia

[Main page](#)  
[Contents](#)  
[Featured content](#)

Article [Talk](#)

## Mannheim

From Wikipedia, the free encyclopedia

*This article is about the city in Germany.*

🔊 **Mannheim** ([help](#)·[info](#)) is a city in southwest and Karlsruhe.

|                                               |                                      |
|-----------------------------------------------|--------------------------------------|
| <b>Area</b>                                   |                                      |
| • <b>Total</b>                                | 144.96 km <sup>2</sup> (55.97 sq mi) |
| <b>Elevation</b>                              | 97 m (318 ft)                        |
| <b>Population (2011-12-31)</b> <sup>[1]</sup> |                                      |
| • <b>Total</b>                                | 314,931                              |
| • <b>Density</b>                              | 2,200/km <sup>2</sup> (5,600/sq mi)  |



**WIKIPEDIA**  
Die freie Enzyklopädie

[Hauptseite](#)  
[Themenportale](#)  
[Von A bis Z](#)

Artikel [Diskussion](#)

## Mannheim

 Der Titel dieses Artikels ist mehrdeutig. Weiter


Die [Quadratstadt](#) und [Universitätsstadt](#) **Mannheim** (1720–1778) der historischen [Kurpfalz](#) bildet das wi

|                            |                                        |
|----------------------------|----------------------------------------|
| <b>Höhe:</b>               | 97 m ü. <a href="#">NHN</a>            |
| <b>Fläche:</b>             | 144,96 km <sup>2</sup>                 |
| <b>Einwohner:</b>          | 291.458 (31. Dez. 2011) <sup>[1]</sup> |
| <b>Bevölkerungsdichte:</b> | 2011 Einwohner je km <sup>2</sup>      |



# Cross-Lingual Data in DBpedia

- DBpedia extracts structured data from Wikipedia in **119 languages**.
- DBpedia contains **lots of data conflicts**, inherited from Wikipedia.
- **Identity resolution is solved** by Wikipedia inter-language links.
- **Schema heterogeneity problem is solved** by community-created mappings from infoboxes to DBpedia ontology.

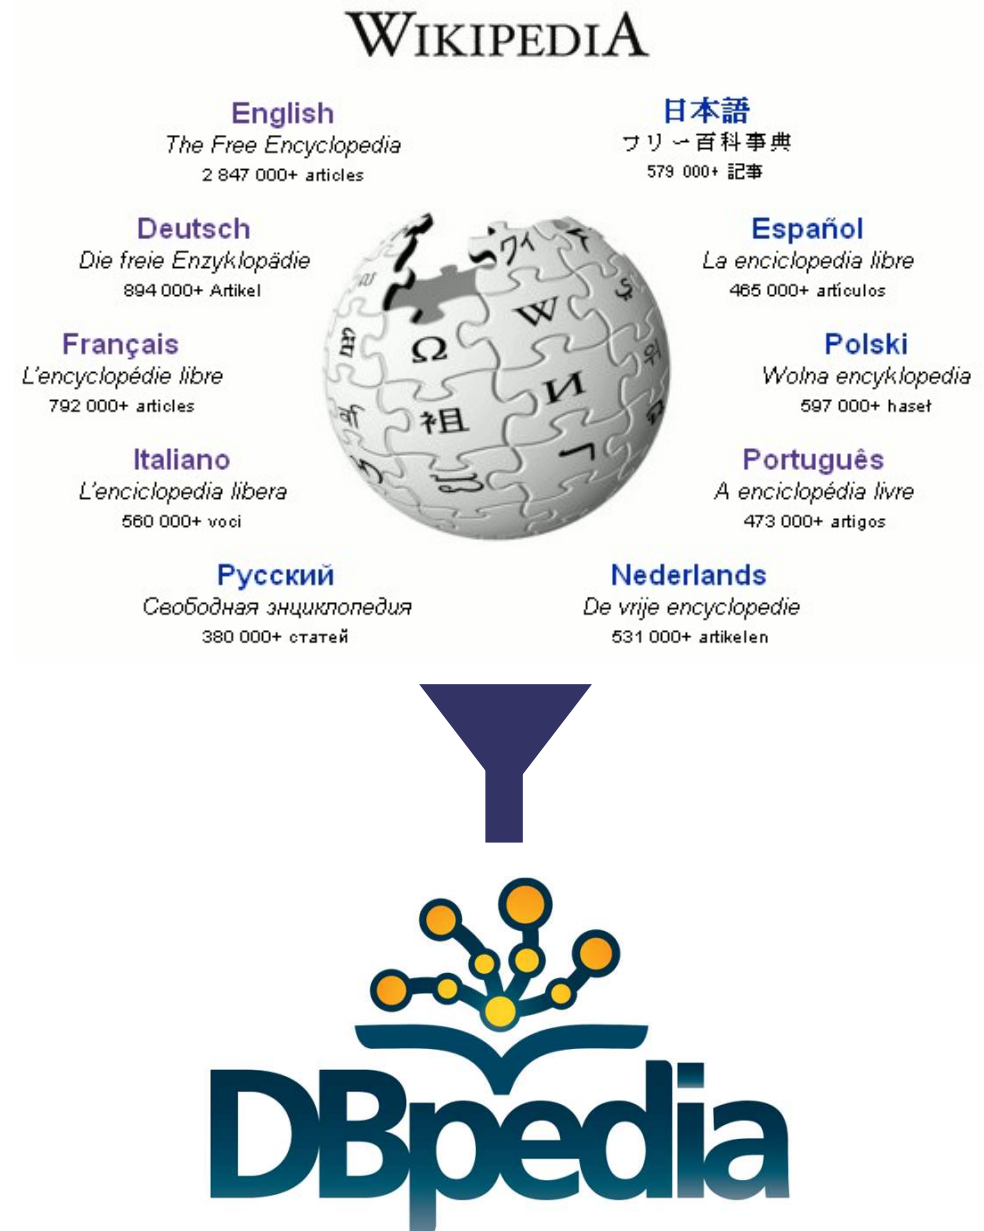

# Goal: Fuse Data between different Language Editions

Which value to prefer?

- maximum?
- average?
- most frequent?
- from the specific language edition?
- most recent?
- inserted by most trusted author?
- edited most times?
- combination of the above?

**data  
itself**

**prove  
nance**

Population of Mannheim in  
8 DBpedia language editions

```
Mannheim populationTotal
      "314,931"@en
      "291,458"@de
      "311,969"@eu
      "311,342"@fr
      "308,676"@nl
      "309,795"@pt
      "313,174"@ru
      "310,000"@sl
```

# Provenance Metadata from the Wikipedia Revision Dumps

- We extract provenance metadata from the Wikipedia revision dumps of the Top10 languages
  - File size of revision dumps: > 6 TByte for English, >2 TByte for German
- Extracted metadata
  - Last edit timestamp of a fact
  - Number of edits of a fact
  - Author of the last edit
    - Author edit count
    - Author registration date

## Provenance metadata

**ru**:Mannheim:populationTotal

|             |                      |
|-------------|----------------------|
| lastedit    | 2011-12-22T00:50:21Z |
| propeditcnt | 3                    |
| autheditcnt | 1136639              |
| authregdate | 2009-12-18T02:08:09Z |

**nl**:Mannheim:populationTotal

|             |                      |
|-------------|----------------------|
| lastedit    | 2007-12-09T16:41:06Z |
| propeditcnt | 1                    |
| autheditcnt | 73                   |
| authregdate | 2007-04-05T08:54:19Z |

# Learning Conflict Resolution Functions

- **Ground Truth:** Geonames, public geographical database
- **Learning:** Choose function with smallest mean absolute error with respect to validation subset of the ground truth.
- Tested conflict resolution functions
  1. *Maximum*
  2. *Average*
  3. *English* – prefer values from English DBpedia
  4. *Vote* – choose the most frequent value
  5. *MostRecent* fact – last edit timestamp
  6. *MostActive* fact – number of edits of a property
  7. *MostActive* author – author edit count
  8. *MostSenior* author – author registration date

# DBpedia Case Study: Results

| Property        | Dataset                | Count | Learned Fusion Function        | Error, % | Error, %, en.dbpedia |
|-----------------|------------------------|-------|--------------------------------|----------|----------------------|
| populationTotal | cities1000-Germany *   | 7330  | Vote<br>(most frequent value ) | 0.3029   | 0.6796               |
| populationTotal | cities1000-Netherlands | 493   | Maximum Value                  | 2.1933   | 3.5714               |
| populationTotal | countries              | 243   | Maximum Value                  | 2.1646   | 6.3485               |
| country         | cities1000-Italy       | 1078  | Vote                           | 0.0000   | 1.2060               |
| country         | cities1000-Brazil      | 1119  | Max author edit count          | 9.8302   | 30.9205              |
| country         | cities1000-Germany     | 7638  | Vote                           | 0.0131   | 0.6415               |



\* “cities1000” are cities with population >1000

- **Error:** Mean absolute percentage error between chosen value and ground truth
- **Error en.dbpedia:** Mean absolute percentage error between value in English DBpedia and gold standard

Volha Bryl, Christian Bizer: Learning Conflict Resolution Strategies for Cross-Language Wikipedia Data Fusion. 4th Workshop on Web Quality @ WWW 2014.

## 5.6 Case Study: Google Knowledge Vault


- uses 12 different extractors to extract 6.4 billion triples (1.6 billion unique triples) from 1 billion page Web crawl
- extracted data is fused to extend the Freebase knowledge base

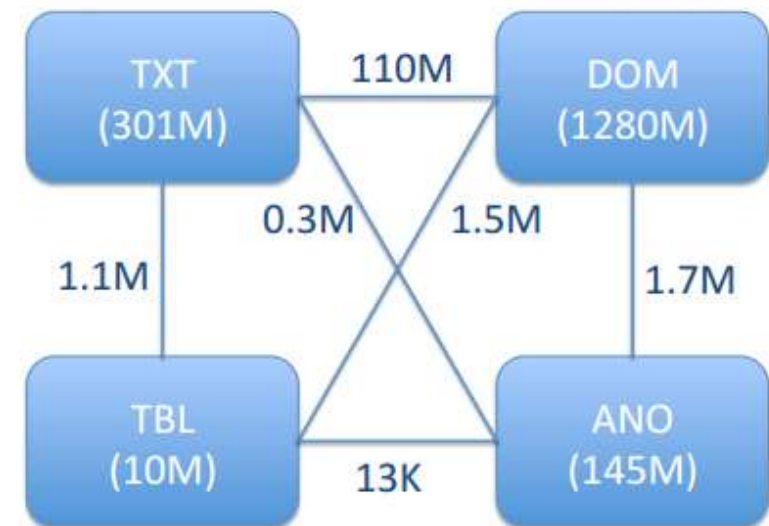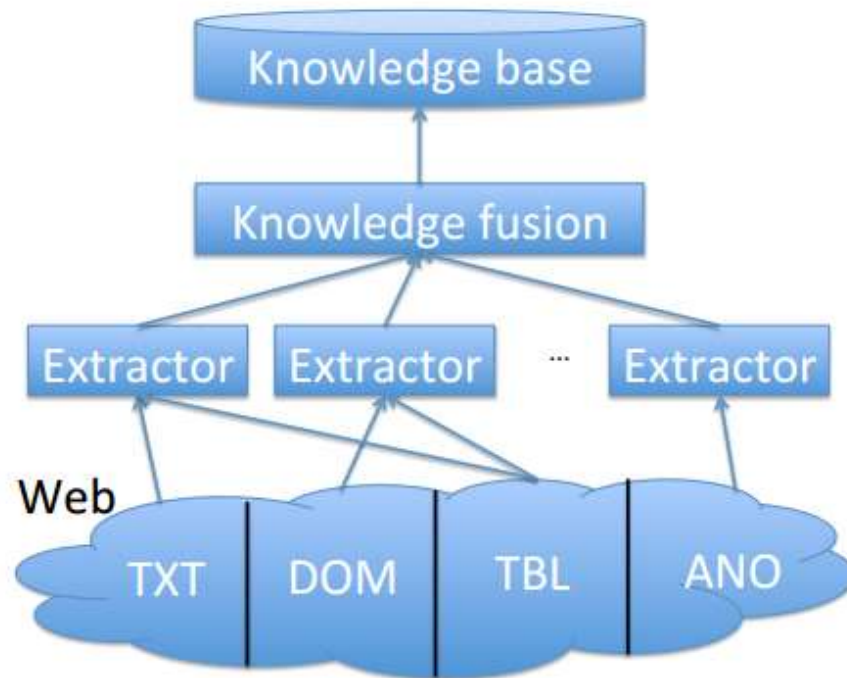

Luna Dong, et al.: From Data Fusion to Knowledge Fusion. VLDB 2014.


# Google Knowledge Vault

- uses probabilistic model to **iteratively** determine quality of triples, sources, and extractors
- result: 90 million triples with  $p > 0.9$  that were not in Freebase before

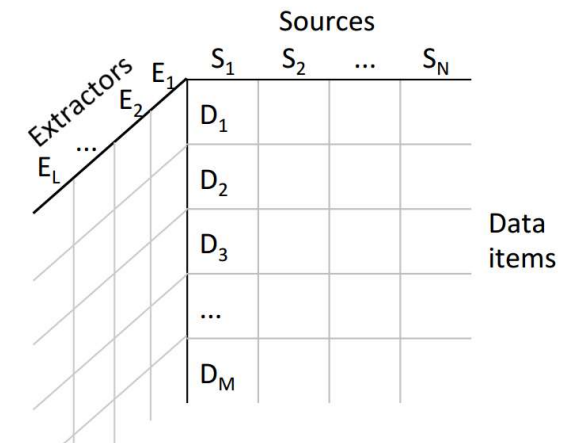

- **Knowledge-based Trust**

- determine trustworthiness of a data source by comparing its content with a knowledge base (ground truth)
- result: better than PageRank in identifying
  - tail websites with high trustworthiness
  - gossip websites

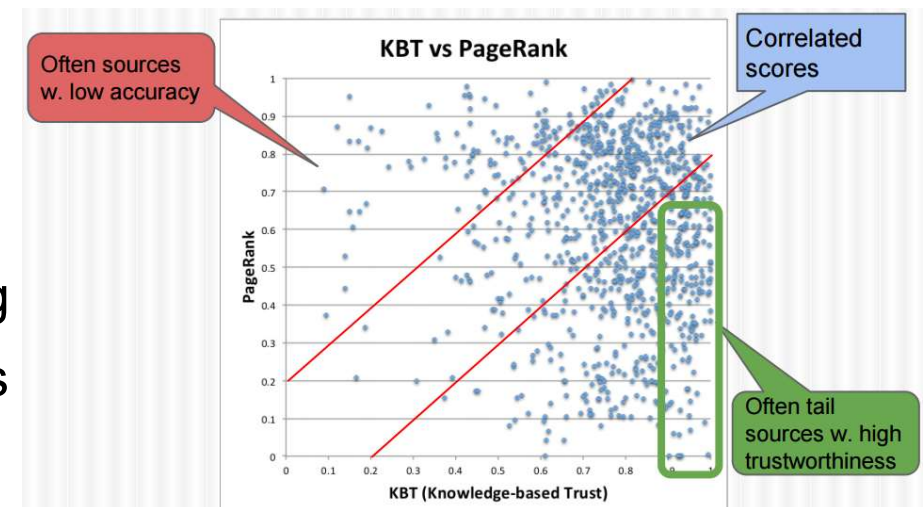


Luna Dong, et al.: Knowledge Vault: A Web-scale Approach to Probabilistic Knowledge Fusion. SIGKDD 2014.  
Luna Dong, et al.: Knowledge-based Trust: Estimating the Trustworthiness of Web Sources. VLDB 2015.



# Summary: Data Fusion

- Data Fusion addresses **missing values** (slot filling) as well as **contradictions** (conflict resolution)
- Appropriate conflict resolution function depends on
  - data type of the values
  - availability of quality-related metadata
  - availability of overlapping data
- On the Web, we often encounter **long-tailed distributions**
  - lots of overlapping data for head entities (New York)
  - hardly any data to fuse for tail entities (some village)
  - example: Web tables matched to DBpedia

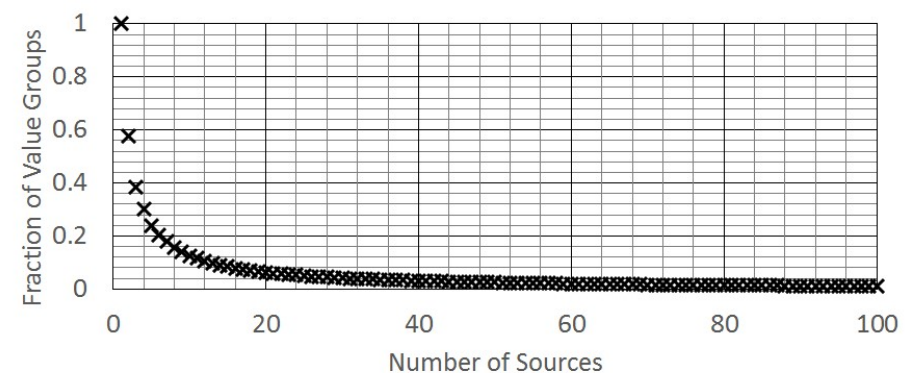

# 6. References

## – Profiling

- Abedjan, Golab, Naumann, Papenbrock: Data Profiling. Morgan & Cleypool Synthesis Lecture in Computer Science, 2018.

## – Provenance

- Dublin Core Metadata Element Set. <http://dublincore.org/documents/dces/>, 2012.
- Gil, Miles: PROV Model Primer, <http://www.w3.org/TR/prov-primer/>, 2013.

## – Data Quality

- Rekatsinas, et al.: HoloClean: Holistic Data Repairs with Probabilistic Inference. VLDB 2017.
- Abedjan, et al.: Detecting data errors: where are we and what needs to be done? VLDB 2016.
- Chandola, et al.: Anomaly Detection: A Survey. ACM Computing Surveys, 2009.
- Naumann, Rolker: Assessment Methods for Information Quality Criteria. Conference on Information Quality, 2000.
- Wang, Strong: Beyond accuracy: What data quality means to data consumers. JMIS, 1996.

# References

## – Data Fusion

- Bleiholder, Naumann: Data Fusion. ACM Computing Surveys, 2008.
- Li, Gao, Meng, et al.: Survey on Truth Discovery. SIGKDD Explorations, 2016.
- Dong, Srivastava: Big Data Integration. Chapter 4. Morgan & Claypool, 2015.
- Ilyas, Chu: Data Cleansing. ACM Books, 2019.
- Rekatsinas: Tutorial Data Integration and Machine Learning. SIGMOD 2018 Chapter ML for DF.
- Dong & Naumann: Data Fusion. Tutorial at VLDB 2009.
- Aggarwal: Managing and Mining Uncertain Data. Springer, 2010.

## – Data Fusion Evaluation Datasets

- Dong: Data Sets for Data Fusion Experiments  
<http://lunadong.com/fusionDataSets.htm>